





20mA
Led Fixtures

20mA LED FIXTURES

EMFA's 20mA LED fixtures are ideal for ambient lighting outdoors and in where only a touch of light is required. These fixtures apart from being used as orientation lights, can light steps and paths and highlight walls and columns. A material mix of die cast aluminium, marine grade stainless steel and acrylic are offered to fit the correct location. A choice of lighting or backlighting LEDs is offered to either give a directional lighting effect or a lighting glow.

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 5 LED colors and 2 LED types are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

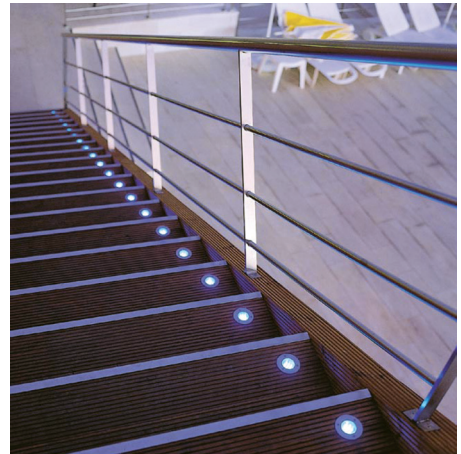

LEDs



20mA, low power LEDs are used in these fixtures. The fixtures can be run in 240V or 12 or 24VDC; however, they are recommended to be operated in 12 or 24VDC to increase the lifetime and reduce the power consumption. In 240V the LEDs last about 8,000 hours and consume around 4W per fixture and in 12 or 24VDC the lifetime is around 16,000 hours and about 0.5W of power consumption.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.


BELKIS 1 RECESSED WALK OVER LED FIXTURES

Class II IP67





Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Glass 6 mm
Standard with 5m 3x0,75 H03 VV-F cable
Available with springs for false ceiling.




9 x 20 mA BACKLIGHTING LEDS	Code No
Warm White	418101
Blue	418102
Red	418103
Yellow	418104
Green	418105




Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Glass 6 mm
Standard with 5m 3x0,75 H03 VV-F cable
Available with springs for false ceiling.




1 x 20 mA BACKLIGHTING LEDS	Code No
Warm White	418111
Blue	418112
Red	418113
Yellow	418114
Green	418115

BELKIS 1 RECESSED WALK OVER LED FIXTURES Class II IP67



Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



2 x 20 mA LEDS

Code No
Mono

Warm White

406101

Blue

406111

Red


406121

Yellow


406131

Green

406141



Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



2+2 x 20 mA LEDS

Code No
Mono

Warm White

406301

Blue

406311

Red

406321

Yellow

406331


Green

406341


Green+Red

406391 *(Special application)

BELKIS 1 RECESSED WALK OVER LED FIXTURES Class II IP67




Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



8 x 20 mA LEDS


-  Warm White
-  Blue
-  Red
-  Yellow
-  Green

Code No
Multi
406501
406511
406521
406531
406541



BELKIS 2 RECESSED WALK OVER LED FIXTURES

Class II IP67









Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Glass 6 mm

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.




18 x 20 mA BACKLIGHTING LEDS	Code No
	Inox
 Warm White	418121
 Blue	418122
 Red	418123
 Yellow	418124
 Green	418125



BELKIS 2 RECESSED WALK OVER LED FIXTURES Class II IP67



Aluminium Spinning Recessing Tube
With Connector



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)
Diffuser : Clear Acrylic
Standard with 5m 3x0,75 H03 VV-F cable



2 x 20 mA LEDS

Code No
Mono

Warm White

416321

Blue

416322

Red


416323

Yellow


416324

Green

416325



Aluminium Spinning Recessing Tube
With Connector



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)
Diffuser : Clear Acrylic
Standard with 5m 3x0,75 H03 VV-F cable



2+2 x 20 mA LEDS

Code No
Dual

Warm White

401301

Blue

401311

Red

401321

Yellow

401331

Green

401341

Green+Red


401391




* Special application for parking lots:
Enter (2 x green)-Do not enter (2 x red)

BELKIS 2 RECESSED WALK OVER LED FIXTURES

Class II IP67



Aluminium Spinning Recessing Tube
With Connector



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



12 x 20 mA LEDS


-  Warm White
-  Blue
-  Red
-  Yellow
-  Green

Code No
Multi
401501
401511
401521
401531
401541

LIGHTSTONE

DRIVE OVER LED FIXTURES
Load 7.5 kN | Class III IP67 IK10

Body
Polycarbonate



Voltage : 12V A.C standard with 10m cable

9 x 20 mA LEDS

Code No


☀ Warm White	426101
🌊 Blue	426102
🔴 Red	426103
☀ Yellow	426104
🌿 Green	426105



Connection Box

Glass reinforced polyester

IP 67 recessable 18 cable glands to serve 18 lightstones complete with one 220 V AC - 12V AC transformer. Maximum distance to box is 50 m.

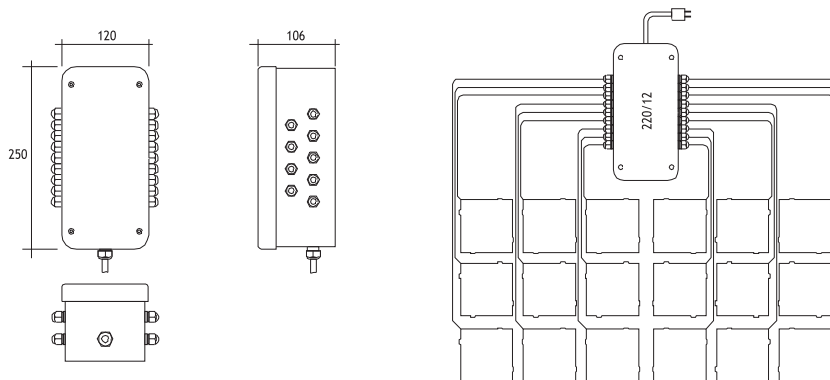


Connection Box

Code No
426201

BELKIS 0 WALL RECESSED LED FIXTURES

Class II IP67

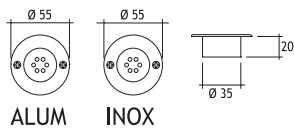

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)



Cable : Potted 5 m 3x0,75 H03 VV-F

Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

6 x 20 mA LIGHTING LEDS

	Code No	
	Alum	Inox
☀ Warm White	416201	416211
🌊 Blue	416202	416212
🔴 Red	416203	416213
☀ Yellow	416204	416214
🌿 Green	416205	416215

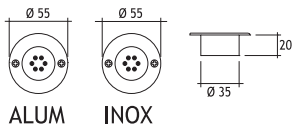

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.


6 x 20 mA BACKLIGHTING LEDS

	Code No	
	Alum	Inox
☀ Warm White	417101	417111
🌊 Blue	417102	417112
🔴 Red	417103	417113
☀ Yellow	417104	417114
🌿 Green	417105	417115



BELKIS 1 WALL RECESSED LED FIXTURES

Class II IP67

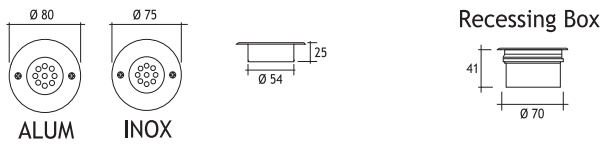


Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)


Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.



9 x 20 mA LIGHTING LEDES

	Code No	
	Alum	Inox
☀ Warm White	416261	416271
🌊 Blue	416262	416272
🔴 Red	416263	416273
☀ Yellow	416264	416274
🌿 Green	416265	416275

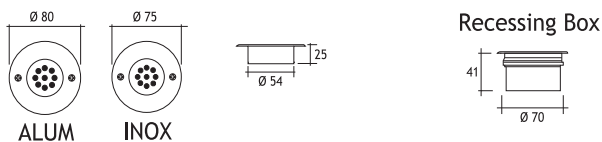


Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.




9 x 20 mA BACKLIGHTING LEDES



	Code No	
	Alum	Inox
☀ Warm White	417191	417201
🌊 Blue	417192	417202
🔴 Red	417193	417203
☀ Yellow	417194	417204
🌿 Green	417195	417205

BELKIS 1 WALL RECESSED LED FIXTURES

Class II IP67



Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.

1 x 20 mA BACKLIGHTING LEDS	Code No	
	Alum	Inox
Warm White	407501	417351
Blue	407511	417352
Red	407521	417353
Yellow	407531	417354
Green	407541	417355




BELKIS 1 WALL RECESSED LED FIXTURES

Class II IP67



ALUM

Recessing Box




Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable

2 x 20 mA LIGHTING LEDS + 1 x 20 mA BACKLIGHTING LED	Code No
☀ Warm White	417451
🌊 Blue	417452
🔴 Red	417453
☀ Yellow	417454
🌿 Green	417455



INOX



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable


2 x 20 mA LIGHTING LEDS + 1 x 20 mA BACKLIGHTING LED	Code No
☀ Warm White	417441
🌊 Blue	417442
🔴 Red	417443
☀ Yellow	417444
🌿 Green	417445

BELKIS 1 WALL RECESSED LED FIXTURES

Class II IP67




Plastik Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)






Diffuser : Clear Acrylic (Not for walk-over)


Standard with 5m 3x0,75 H03 VV-F cable




Symmetrical

12 x 20 mA LIGHTING LEDS Code No

 Warm White	417801
 Blue	417802
 Red	417803
 Yellow	417804
 Green	417805




Plastik Recessing Box



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)






Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable






Symmetrical

12 x 20 mA BACKLIGHTING LEDS Code No

 Warm White	417641
 Blue	417642
 Red	417643
 Yellow	417644
 Green	417645

BELKIS 1 WALL RECESSED LED FIXTURES

Class II IP67








Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)




Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable

Asymmetrical

12 x 20 mA LIGHTING LEDS Code No

 Warm White	417771
 Blue	417772
 Red	417773
 Yellow	417774
 Green	417775








Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



4 x 20 mA LIGHTING LEDS Code No

	Asymmetrical 30°	Asymmetrical 120°
--	------------------	-------------------

 Warm White	417691	417811
 Blue	417692	417812
 Red	417693	417813
 Yellow	417694	417814
 Green	417695	417815

BELKIS 2 WALL RECESSED LED FIXTURES

Class II IP67

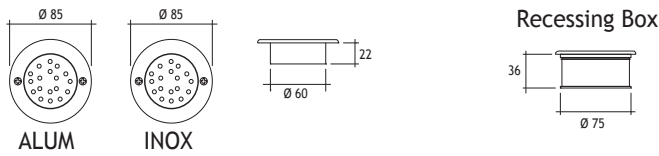



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

18 x 20 mA LIGHTING LEDS	Code No	
	Alum	Inox
Warm White	416281	416291
Blue	416282	416292
Red	416283	416293
Yellow	416284	416294
Green	416285	416295

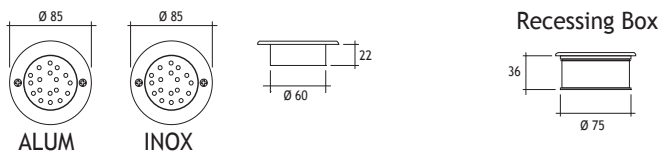

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

18 x 20 mA BACKLIGHTING LEDS	Code No	
	Alum	Inox
Warm White	417561	417571
Blue	417562	417572
Red	417563	417573
Yellow	417564	417574
Green	417565	417575

Body

Stainless steel

Reflector

Anodized aluminium


Recessing Box

Galvanized Steel

Diffusers

4 mm Clear Glass

BERGAMA LED 140 X 70

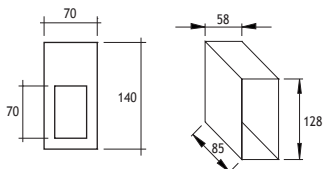

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Recessing Box : Inox (Stainless Steel)

Standard with 5m 3x0,75 H03 VV-F cable

4 x 20 mA 30° LIGHTING LEDS	Code No	
	Steel (For dry area use only)	Inox (IP 67)
☀ Warm White	404151	404161
🌊 Blue	404152	404162
🔴 Red	404153	404163
☀ Yellow	404154	404164
🌿 Green	404155	404165

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Recessing Box : Inox (Stainless Steel)


Standard with 5m 3x0,75 H03 VV-F cable

4 x 20 mA 120° BACKLIGHTING LEDS	Code No	
	Steel (For dry area use only)	Inox (IP 67)
☀ Warm White	404171	404181
🌊 Blue	404172	404182
🔴 Red	404173	404183
☀ Yellow	404174	404184
🌿 Green	404175	404185



BERGAMA WALL RECESSED LED FIXTURES IP67

BERGAMA LED 70 X 140

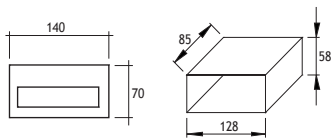


Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Recessing Box : Inox (Stainless Steel)

Standard with 5m 3x0,75 H03 VV-F cable




8 x 20 mA 30° LIGHTING LEDS	Code No	
	Steel (For dry area use only)	Inox (IP 67)
☀ Warm White	404251	404261
🌊 Blue	404252	404262
🔴 Red	404253	404263
☀ Yellow	404254	404264
🌿 Green	404255	404265

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Recessing Box : Inox (Stainless Steel)

Standard with 5m 3x0,75 H03 VV-F cable



8 x 20 mA 120° BACKLIGHTING LEDS	Code No	
	Steel (For dry area use only)	Inox (IP 67)
☀ Warm White	404271	404281
🌊 Blue	404272	404282
🔴 Red	404273	404283
☀ Yellow	404274	404284
🌿 Green	404275	404285

DYO WALL RECESSED LED FIXTURES

Class II IP67

Body & Frame

Stainless steel (Inox)

Recessing Box

Stainless steel (Inox)

Diffusers

Clear Acrylic

Power Supply

240 V AC Class II (12-24 V DC Class III on request)

Gear

Complete with Led Driver


Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate
Standard with 5m 3x0,75 H03 VV-F cable

12 x 20 mA 120° BACKLIGHTING LEDS

Color	Code No
Warm White	404501
Blue	404502
Red	404503
Yellow	404504
Green	404505


Symmetrical

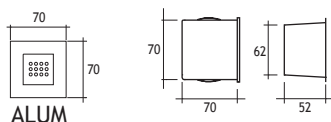

12 x 20 mA 30° LIGHTING LEDS

Color	Code No
Warm White	404511
Blue	404512
Red	404513
Yellow	404514
Green	404515


Asymmetrical



4 x 20 mA 30° LIGHTING LEDS

Color	Code No
Warm White	404521
Blue	404522
Red	404523
Yellow	404524
Green	404525

Asymmetrical



DYO WALL RECESSED LED FIXTURES

Class III IP20

Outer Frame & Body


Anodized aluminium

Recessing Box

Galvanized Steel

Diffuser

Glass

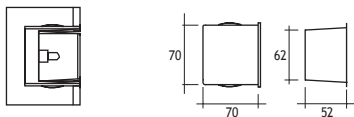

Voltage : 240V A.C with integrated driver
(12V AC or DC, 24V AC or DC on request)

With connector

DYO 69 14L

3 x 20 mA LIGHTING LEDS

Code No

☀ Warm White	405101
🌊 Blue	405111
🔴 Red	405121
☀ Yellow	405131
🌿 Green	405141

Voltage : 240V A.C with integrated driver
(12V AC or DC, 24V AC or DC on request)

With connector

DYO 69 14L


4 x 20 mA LIGHTING LEDS

Code No

☀ Warm White	405151
🌊 Blue	405152
🔴 Red	405153
☀ Yellow	405154
🌿 Green	405155

BELKIS 0 SURFACE MOUNTED LED FIXTURES


Class II IP67

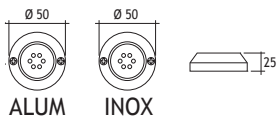


Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable




	Code No	
	Alum	Inox
6 x 20 mA LIGHTINGS LEDS		
Warm White	416221	416231
Blue	416222	416232
Red	416223	416233
Yellow	416224	416234
Green	416225	416235

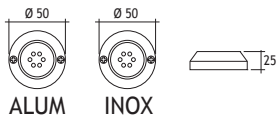

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic


Standard with 5m 3x0,75 H03 VV-F cable



	Code No	
	Alum	Inox
6 x 20 mA BACKLIGHTING LEDS		
Warm White	417141	417151
Blue	417142	417152
Red	417143	417153
Yellow	417144	417154
Green	417145	417155

BELKIS 1 SURFACE MOUNTED LED FIXTURES


Class II IP67

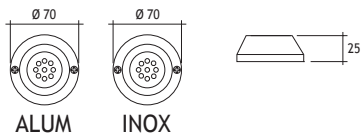

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable



9 x 20 mA LIGHTING LEDES


	Code No	
	Alum	Inox
☀ Warm White	417751	417761
🌊 Blue	417752	417762
🔴 Red	417753	417763
☀ Yellow	417754	417764
🌿 Green	417755	417765

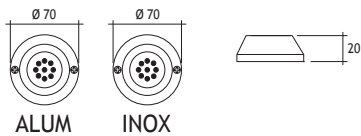

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable




9 x 20 mA BACKLIGHTING LEDES

	Code No	
	Alum	Inox
☀ Warm White	417271	417281
🌊 Blue	417272	417282
🔴 Red	417273	417283
☀ Yellow	417274	417284
🌿 Green	417275	417285

BELKIS 1 SURFACE MOUNTED LED FIXTURES


Class II IP67



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic






Standard with 5m 3x0,75 H03 VV-F cable




Symmetrical

12 x 20 mA LIGHTING LEDS

Code No


 Warm White	418201
 Blue	418202
 Red	418203
 Yellow	418204
 Green	418205



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic






Standard with 5m 3x0,75 H03 VV-F cable




Symmetrical

12 x 20 mA BACKLIGHTING LEDS

Code No

 Warm White	418211
 Blue	418212
 Red	418213
 Yellow	418214
 Green	418215


BELKIS 1 SURFACE MOUNTED LED FIXTURES Class II IP67



Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)






Diffuser : Clear Acrylic


Standard with 5m 3x0,75 H03 VV-F cable



Asymmetrical

12 x 20 mA LIGHTING LEDS Code No


 Warm White	418251
 Blue	418252
 Red	418253
 Yellow	418254
 Green	418255








Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable




4 x 20 mA LIGHTING LEDS Code No
Asymmetrical 30° Asymmetrical 120°

 Warm White	418311	418321
 Blue	418312	418322
 Red	418313	418323
 Yellow	418314	418324
 Green	418315	418325



BELKIS 1 SURFACE MOUNTED LED FIXTURES


Class II IP67

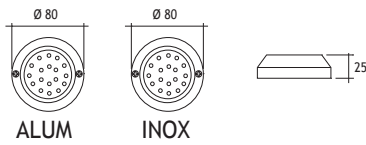


Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable




	Code No	
	Alum	Inox
Warm White	416301	416311
Blue	416302	416312
Red	416303	416313
Yellow	416304	416314
Green	416305	416315

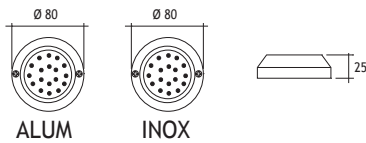

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic



Standard with 5m 3x0,75 H03 VV-F cable



	Code No	
	Alum	Inox
Warm White	417601	417611
Blue	417602	417612
Red	417603	417613
Yellow	417604	417614
Green	417605	417615

TAROS SURFACE MOUNTED LED FIXTURE Class II IP67


Body
Acrylic
Cover
Stainless steel
Gear
Complete with Led Driver

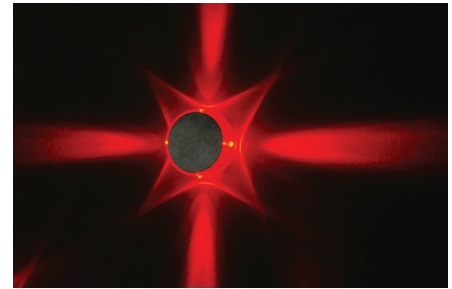

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER
4 x 20 mA LIGHTING LEADS Code No


 Warm White	428101
 Blue	428102
 Red	428103



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER
4 x 20 mA LIGHTING LEADS Code No


 Warm White	428111
 Blue	428112
 Red	428113

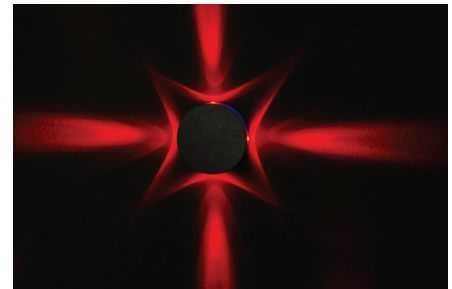



SIMENA SURFACE MOUNTED LED FIXTURE



Class II IP67

Body
PMMA
Cover
ABS
Colour
Matt Grey, Chrome, Or White
Gear
Complete with Led Driver




Voltage : 12 or 24V DC Class III
Diffuser : Clear Acrylic
Standard with 5m 3x0,75 H03 VV-F cable

3 x 20 mA SMD LEDS	Code No
 Warm White	432201
 Blue	432202

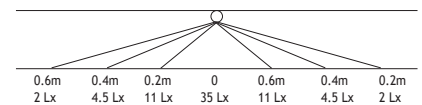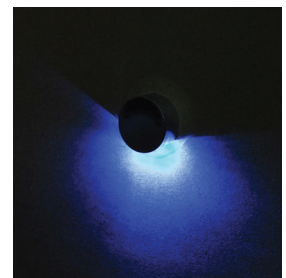

JUPITER SURFACE MOUNTED LED FIXTURES IP67



Body
PMMA
Cover
Stainless steel
Gaskets
Silicone
Gear
Complete with Led Driver



Voltage : 12 or 24V DC Class III
Diffuser : Frosted Acrylic
Standard with 5m 3x0,75 H03 VV-F cable

3 x 20 mA SMD LEDS Code No
SURFACE MOUNTED

☀ Warm White 415111
🌊 Blue 415112

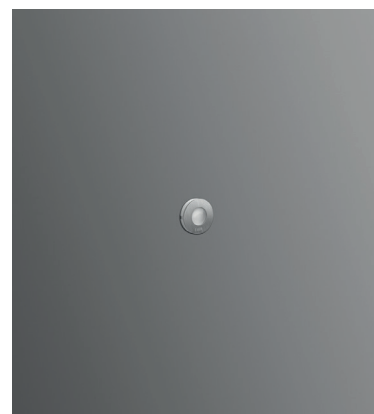

Voltage : 12 or 24V DC Class III
Diffuser : Frosted Acrylic
Standard with 5m 3x0,75 H03 VV-F cable

3 x 20 mA SMD LEDS Code No
RECESSED

☀ Warm White 415101
🌊 Blue 415102

