


# PINARA

## LINEAR LED DOWNLIGHT





### Class II IP20



The PINARA LED downlight is specially designed to deliver high output LED light with very clean beam angles to corridors, hotel rooms, museums and general lighting of public spaces. The Nichia LEDs in the PINARA are very efficient and have a high CRI (90). The unique lens that is used in this fixture creates very sharp beams that minimize the spill of uncontrolled light from the fixture. This reduces the glare of the fixture and gives more control to the architects and designers.

#### “Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 standard paint colors, 2 white tones, 2 wattages are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

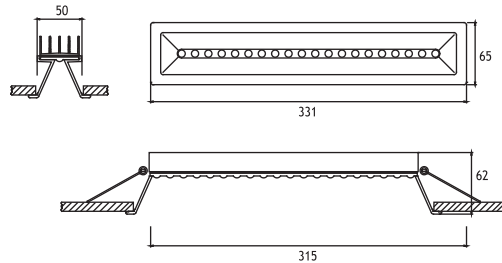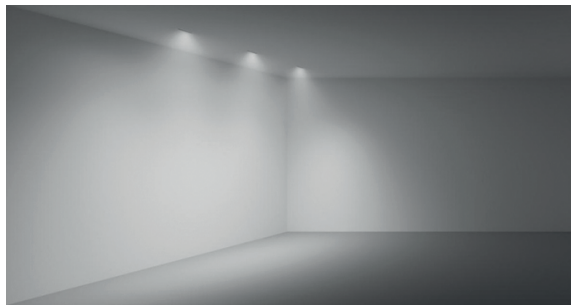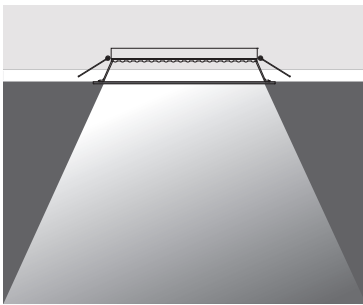

**Led** : 350 - 500 - 700 mA (Nichia)  
**Gear** : 240V Non-Dimmable Driver  
 (1-10V Dimmable Driver and  
 DALI Driver available on request)  
**Cable** : 0.5 m 2x0,75 mm H03 VV-F



Light Color	Power	Beam Angle	Code No
Natural White	4000 K	15°	392112
	1600 lm		

#### LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

#### Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.



**EMFA**