





CERAMUS MINI LED APPLIQUES

Class I IP65

Available in any of these RAL colors



Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffuser
Tempered Glass or acrylic
Gaskets
Silicon

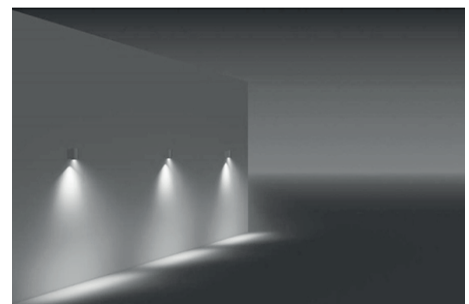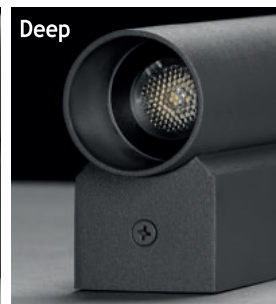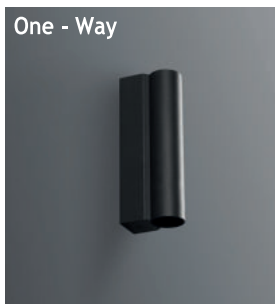

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
Pipe : Length can be adjusted upon request

POWERLED

	6000 K	Total Lighting Output		463013
		1W	3W	
☀️ Cool White	6000 K	102 lm	270 lm	3W

