




SQUARE LED APPLIQUE

Class I IP65


Available in any of these RAL colors



- Body**
Die cast aluminium
- Paint**
Electrostatic powder
- Bracket**
Die cast aluminium
- Diffuser**
Tempered Glass or acrylic
- Gaskets**
Silicone
- Connection**
IP connection box

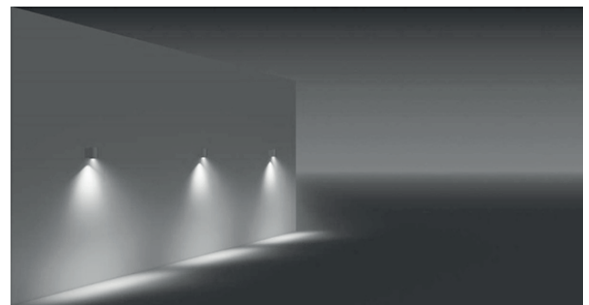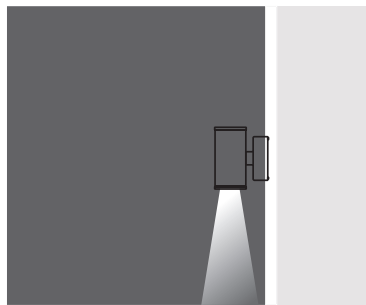

- Voltage** : 240V A.C with integrated driver
(24V AC or DC on request)
- Lens** : 20°, 32°, 52°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

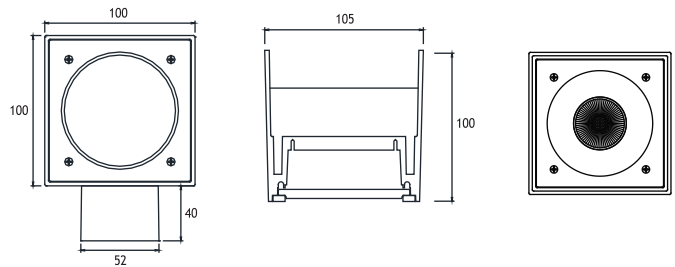

Multichip LED		Total Lighting Output	Code No
350 mA (9W)			
☀ Warm White	3000 K	672 lm	434031