


SQUARE MINI LED SPOT

LED DRIVER IN HADE

Class I IP67 IK10

Available in any of these RAL colors



“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Body

Die cast aluminium

Paint



Electrostatic powder

Gaskets

Silicone


Diffusers

Tempered Glass

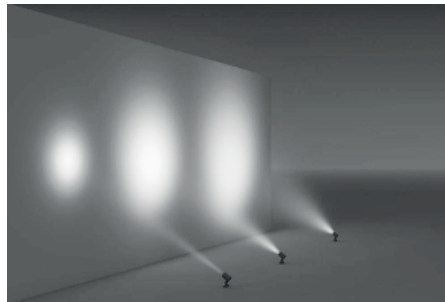

Picket

Code No: 953901




Visor

Code No: 953911





Cylinder Visor

Code No: 953921



Honeycomb

Code No: 953931

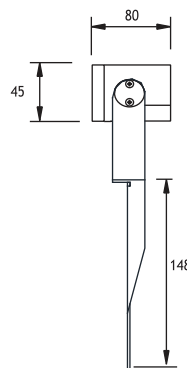

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

1 x 350 mA (6 W) COB LED

12V - 24V (240V A.C with external driver)

Total
Lighting Output Code No

Lighting Output	Code No
510 lm	438021

☀ Warm White 3000 K