

LEON LED BOLLARD

Class I IP65

Available in any of these RAL colors


7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Leon Bollard combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The bollard is designed to light pathways, landscapes and open spaces. The Leon bollard gives light only in the downward direction. This avoids any kind of glare and light pollution. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 12W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete or a picket to mount into the earth.

Head	Pipe
Die cast aluminium	Extrusion aluminium
Diffusers	Paint
Frosted polyamide 6.6	Electrostatic powder

Led : Circular LEDs (6W or 12W)
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : Polyamide
CRI : >80

LEON (350 mm)	Total Lighting Output	Code No
700 mA (12W) CIRCULAR LED		
☀ Natural White 4000 K	1380 lm	177012

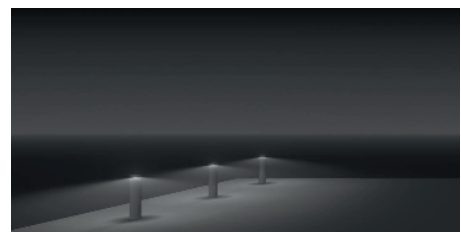

Mounting Fixtures

