

ASSOS 2 RECESSED DRIVE OVER FIXTURES

Load 15 kN | Class I IP67 IK10

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Assos 2 series is specially designed to light facades, columns, monuments and trees with a die cast aluminium grill protecting the glass. The fixture can be equipped with metal halide, halogen or fluorescent lamps. The fixture is made completely of die cast aluminium body, which allows for IP67 and IK10 and a load of 15kN. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete. A louvre can be ordered separately to reduce the glare of the lamps.



Cover

Die cast aluminium

Body

Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box.

Gaskets

Silicone

Diffusers

8 mm Tempered Glass

Screws



316L Stainless steel

Glands

2 x PG 13.5

Recessing Tube




Polyamide 6

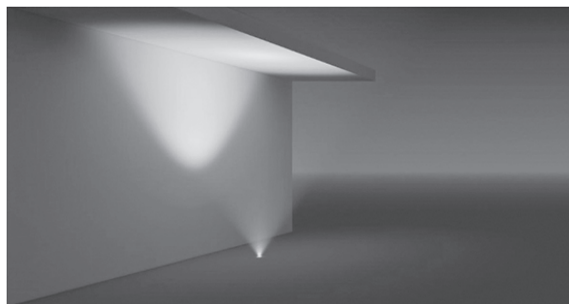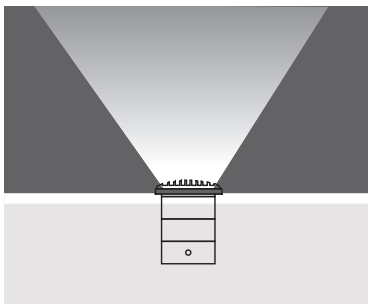

HALOGEN PAR 38 100W 30°

Code No

201141



Caution:

The louvre and filter cannot be applied to the standard fixture. These options should be mentioned when ordering.

Accessories:



Louvre

To avoid glare. Can be applied to all lamp types except Halogen PAR 30 and 38

Code No 955105

