

PYRAMID

RECESSED FIXTURES Class II IP55 IK08

Cover & Body

Glass reinforced polyester

Screws

Inox

Gasket

Silicone




Glass

Tempered

Recessing Box

Galvanized steel

Available in any
of these RAL colors

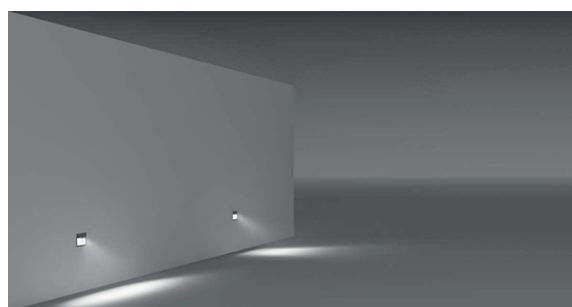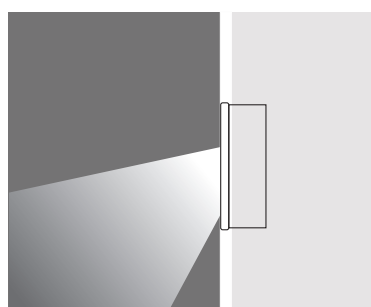


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

Lampholder: G24 d-2

1 x FLUO. 18W Code No
501101

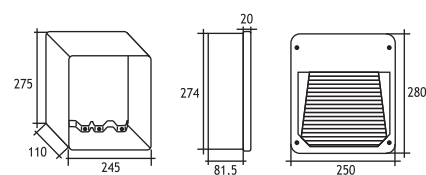

Recessing Box