
Selge Applique

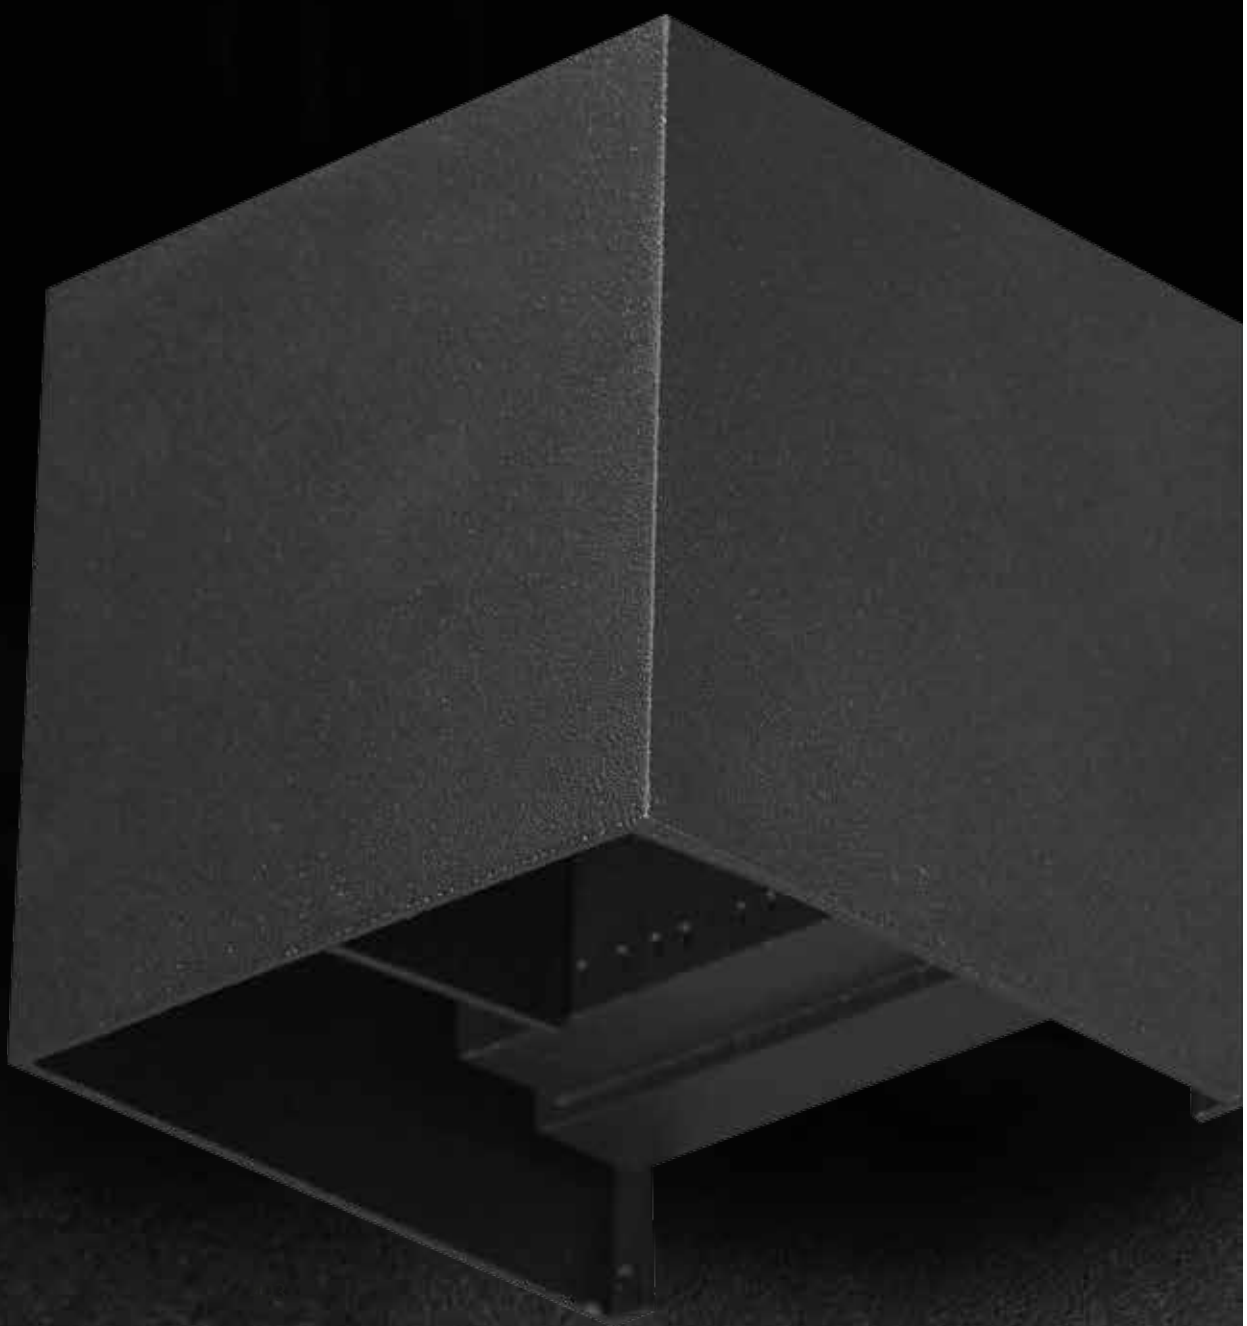

EMFA

SELGE

ADJUSTABLE TWO WAY LED APPLIQUES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Selge Adjustable Applique series consists of a range of LED light sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired light effect.



Outer Body
Extruded aluminium
Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffuser
Tempered Glass or acrylic


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Adjustable



Led : Linear LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 3mm Tempered Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90





Power	Kelvin	Real Lumen Output	Code No
2x 3W	2700 K	2x 285 lm	108004
2x 3W	3000 K	2x 285 lm	108001
2x 3W	4000 K	2x 290 lm	108002
2x 3W	6000 K	2x 296 lm	108003



EMFA