




# SQUARE LED APPLIQUE

## Class I IP65

Available in any of these RAL colors



**Body**  
Die cast aluminium  
**Paint**  
Electrostatic powder  
**Bracket**  
Die cast aluminium  
**Diffuser**  
Tempered Glass or acrylic  
**Gaskets**  
Silicone  
**Connection**  
IP connection box

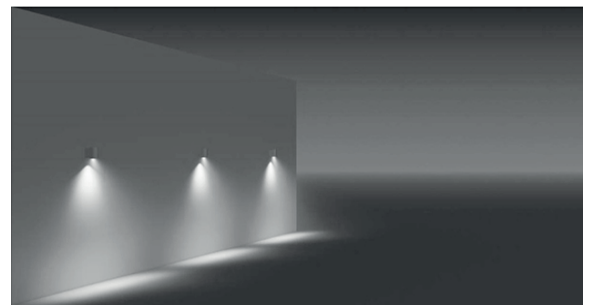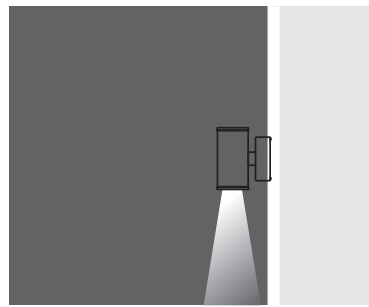

**Voltage** : 240V A.C with integrated driver  
(24V AC or DC on request)  
**Diffuser** : Clear Glass 8 mm (Frosted Glass on request)  
**Cable** : Potted 5 m 3x0,75 H03 VV-F

OSRAM SMD LED		Total Lighting Output	Code No
350 mA (6W) LED			
☺ Natural White	4000 K	640 lm	434012

