

BELKIS

RECESSED WALK OVER LED FIXTURES

Class II IP67

EMFA's 20mA LED fixtures are ideal for ambiance lighting outdoors and in where only touch of light is required. These fixtures apart from being used as orientation lights, can light steps and paths and highlight walls and columns acrylic are offered to fit the correct location. A choice of lighting or backlighting LEDs is offered to either a directional lighting effect or a lighting glow.

"Customization" is EMFA's standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, and available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Glass 6 mm

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.

Single color LED options upon request are ;

Blue Amber Green Red

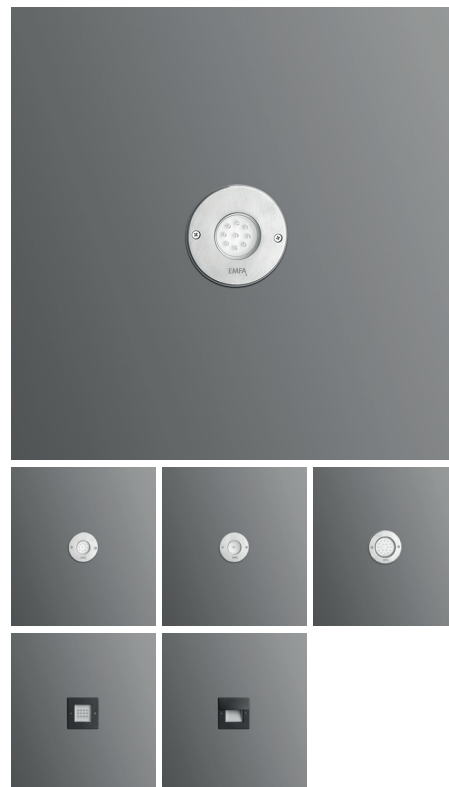

BELKIS 1





Power

9x20mA

Code No
Inox

418101

BELKIS 1




Power

1x20mA

Code No
Inox

418111

BELKIS 2



Power

18x20mA

Code No
Inox


418121

BELKIS

WALL RECESSED LED FIXTURES

Class II IP67

Available in any
of these RAL colors



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Cable : Potted 5 m 3x0,75 H03 VV-F


Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

Single color LED options upon request are ;

Blue Amber Green Red

BELKIS 0



Power

Code No

Alum Inox


6x20mA LIGHTING LEDS

416201 416211

6x20mA LIGHTING LEDS

417101 417111

BELKIS 0



Power

Code No

Alum Inox



9x20mA LIGHTING LEDS

416261 416271

9x20mA BACKLIGHTING LEDS

417191 417201

BELKIS 1



Power


Code No

Alum Inox

1x20mA BACKLIGHTING LEDS

407501 417351

BELKIS 2



Power

Code No

12x20mA LIGHTING LEDS

416281

4x20mA LIGHTING LEDS

416291

4x20mA BACKLIGHTING LEDS

416561

4x20mA BACKLIGHTING LEDS



416571

BELKIS

SURFACE MOUNTED LED FIXTURES

Class II IP67

Available in any
of these RAL colors



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)



Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;

Blue Amber Green Red

BELKIS 0





Power

Code No
Alum Inox

6x20mA LIGHTINGS LEDS	416221	416231
6x20mA BACKLIGHTING LEDS	417141	417151

BELKIS 0



Power

Code No
Alum Inox

9x20mA LIGHTING LEDS	417751	417761
9x20mA BACKLIGHTING LEDS	417271	417281

DYO

WALL RECESSED LED FIXTURES

Class II IP67



Outer Frame & Body

Anodized aluminium

Recessing Box

Galvanized Steel

Voltage : 240V A.C (12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Polycarbonate

Cable : Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;


Blue Amber Green Red

SYMMETRICAL INOX




Power	Lens	Code No
12x20mA BACKLIGHTING LEDS	120°	404501

ASYMMETRICAL INOX




Power	Lens	Code No
12x20mA LIGHTING LEDS	30°	404511
4x20mA LIGHTING LEDS	30°	404521

ASYMMETRICAL ANODIZED ALUMINIUM



Power	Code No
3x20mA LIGHTING LEDS	405101

ASYMMETRICAL ANODIZED ALUMINIUM




Power	Code No
4x20mA LIGHTING LEDS	405151

LIGHTSTONE

DRIVE OVER LED FIXTURES
Load 7.5 kN | Class III IP67 IK10

Body
Polycarbonate



Voltage : 12V A.C standard with 10m cable

9 x 20 mA LEDS

Code No

☀ Warm White

426101

Single color LED options upon request are ;


🟦 Blue 🟡 Amber 🟢 Green 🔴 Red



Connection Box

Glass reinforced polyester

IP 67 recessable 18 cable glands to serve 18 lightstones complete with one 220 V AC - 12V AC transformer. Maximum distance to box is 50 m.

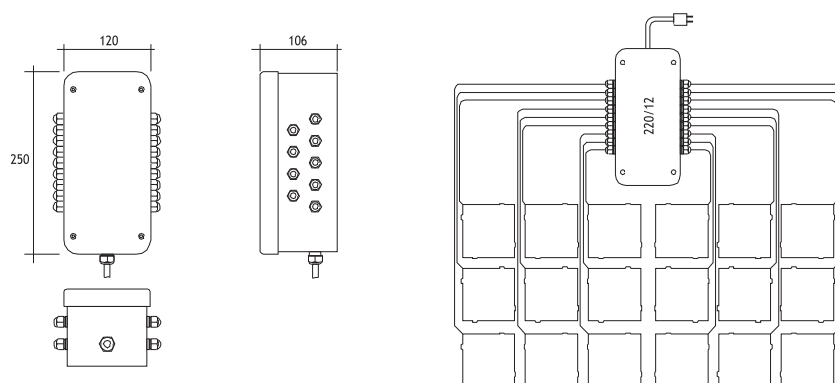

Code No


Connection Box

426201

TAROS

SURFACE MOUNTED LED FIXTURE
Class II IP67



Body
Acrylic
Cover
Stainless steel
Gear
Complete with Led Driver



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER 4 x 20 mA LIGHTING LEDS		Code No
 Warm White		428101

Single color LED options upon request are ;
 Blue  Amber  Green  Red

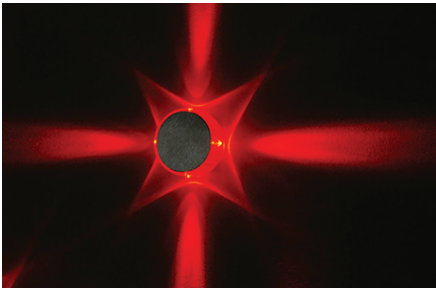

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER 4 x 20 mA LIGHTING LEDS		Code No
 Warm White		428111

Single color LED options upon request are ;
 Blue  Amber  Green  Red

