




L TYPE LED BOLLARDS

Class I IP65

Available in any of these RAL colors



- Head**
- Die cast aluminium
- Diffuser**
- Tempered Glass 4 mm
- Pipe**
- Extrusion aluminium
- Base**
- Die cast aluminium
- Paint**
- Electrostatic powder

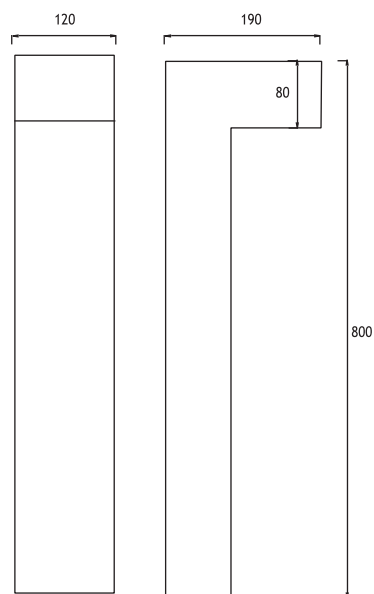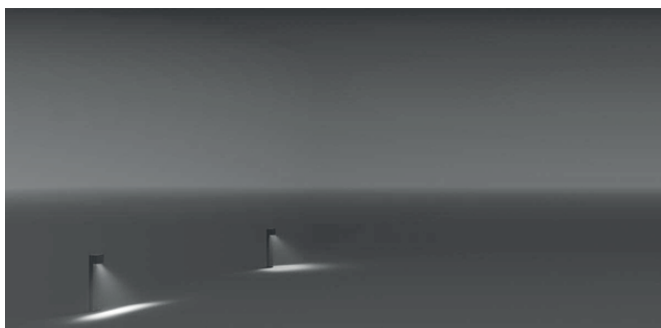

80 cm Bollard

Voltage : 240V AC with integrated driver
(12V DC or 24V DC on request)

Diffuser : Clear Glass 4 mm

Cable : Potted 5 m 3x0,75 H03 VV-F

| COB LED 6W | Total Lighting Output | Code No |
|------------|-----------------------|---------|
|------------|-----------------------|---------|

| | | | |
|--------------|--------|--------|--------|
| ☀ Warm White | 3000 K | 255 lm | 125101 |
|--------------|--------|--------|--------|