

# SANTOS 5 RECESSED DRIVE OVER FIXTURES

Load 6 kN | Class I IP67 IK10

EMFA's Santos step mounted series is specially designed to deliver low-glare lighting to facades, columns, monuments and trees with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. A shield above the lamp reduces the glare of the metal halide lamps. A mirror finish reflector allows for a narrow to wide beam light output. An anti-slip glass is available upon request.

**Cover**

316L Stainless steel

**Body**

Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box

**Gaskets**

Silicone

**Diffusers**

8 mm Tempered Glass

**Screws**


316L Stainless steel

**Glands**



2 x PG 13.5

**Recessing Tube**


Polyamide 6



**LED**

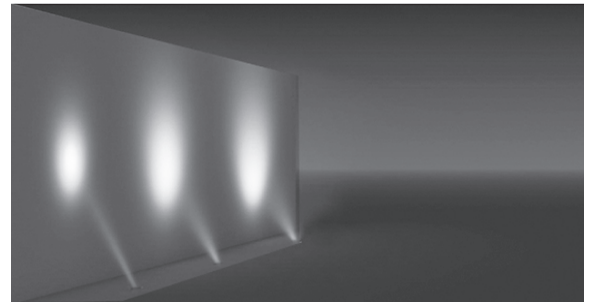
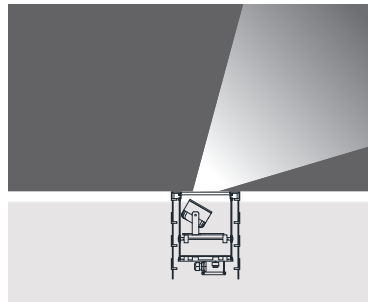


18W LED - 500 mA		Total Lighting Output	Code No
☀ Warm White	3000 K	1224 lm	551301




**Mounting Feature**

Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture. To make the fixture drive over, the recessing tube should be mounted flush to the ground.



Correct

When mounting the fixture on uneven surfaces, place so that the water does not accumulate on the surface of the fixture.



Incorrect