


SQUARE



LED APPLIQUE

Class I IP65

Available in any of these RAL colors



- Body**
Die cast aluminium
- Paint**
Electrostatic powder
- Bracket**
Die cast aluminium
- Diffuser**
Tempered Glass or acrylic
- Gaskets**
Silicone
- Connection**
IP connection box

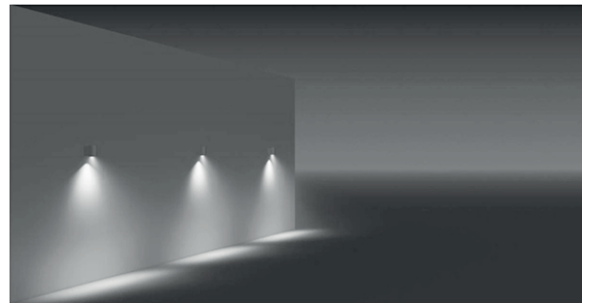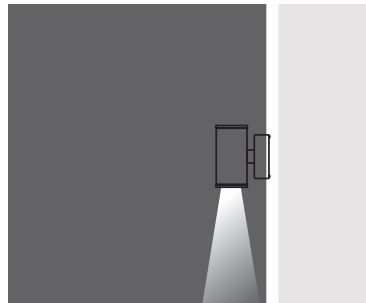

- Voltage** : 240V A.C with integrated driver
(24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

POWERLED		Total Lighting Output	Code No
350 mA (6W) LED			
☀ Cool White	6000 K	612 lm	434023

