



ANI 4 SIDE ALUM LED POLE

Class I IP65 IK08

Available in any of these RAL colors



- Led** : Linear LEDs
- Voltage** : 240 VAC with integrated driver
(12-24 VDC on request)
- Diffuser** : 4mm Tempered Glass
- Beam Angle** : 45° / 60° / 90°
- Mac Adam** : 3
- CRI** : >80
- L.O.R %** : %70

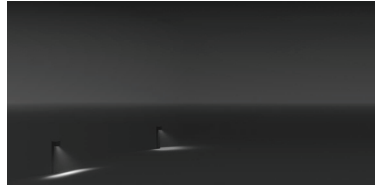

2000mm

Power	Code No	Kelvin	Real Lumen Output	Nominal Lumen Output
24W	460001	3000 K	1780 lm	2550 lm
48W	460011	3000 K	3080 lm	4300 lm
24W	460002	4000 K	2047 lm	2932 lm
48W	460012	4000 K	3542 lm	5060 lm

4000mm

Power	Code No	Kelvin	Real Lumen Output	Nominal Lumen Output
24W	460101	3000 K	1780 lm	2550 lm
48W	460111	3000 K	3080 lm	4300 lm
24W	460102	4000 K	2047 lm	2932 lm
48W	460112	4000 K	3542 lm	5060 lm

6000mm

Power	Code No	Kelvin	Real Lumen Output	Nominal Lumen Output
24W	460201	3000 K	1780 lm	2550 lm
48W	460211	3000 K	3080 lm	4300 lm
24W	460202	4000 K	2047 lm	2932 lm
48W	460212	4000 K	3542 lm	5060 lm

