


BELKIS 1 LLA SURFACE MOUNTED LED FIXTURES

Class I IP67 IK08

Available in any of these RAL colors



The Belkis 1 LLS is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 2 different tones of white, 3000K and 4000K.

Body

Die cast aluminium

Paint

Electrostatic powder


Diffusers

Tempered Glass 4 mm



Gaskets

Silicone

Symmetrical With Glare-Glass or Clear Glass

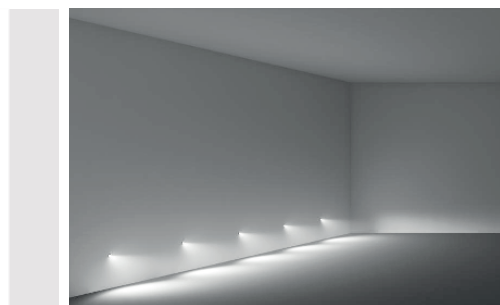

- Voltage** : 240V AC with integrated driver
(12V DC or 24V DC on request)
- Diffuser** : Anti-Glare Glass 4 mm
- Cable** : Potted 5 m 3x0,75 H03 VV-F



ALUM

Symmetrical With Anti-Glare Glass

1 x 350 mA (4 W) LED	Total Lighting Output	Code No
△ Natural White 4000 K	295 lm	424162