


KNIDOS

SURFACE MOUNTED FIXTURES IP67 IK10

Available in any
of these RAL colors



Cover

316L Stainless steel

Outer Body

316L Stainless steel

Inner Body

Glass reinforced polyester

Diffusers


12 mm Tempered Glass

Gaskets


Silicone

Screws

316L Stainless Steel

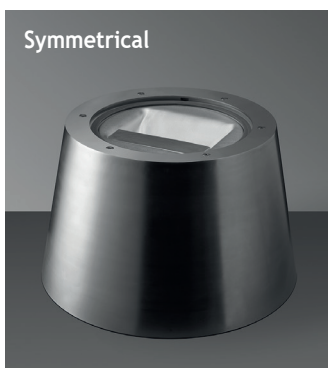

Symmetrical

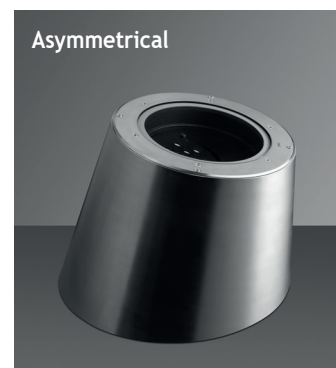

Asymmetrical

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Diffuser : 12 mm Clear Glass (Frosted Glass on request)

Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F



Single color LED options upon request are ;

Blue Amber Green Red





Suitable for Historical Sites

Symmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	810 lm	10°,25°,40°	257244
18W	2700 K	1620 lm	10°,25°,40°	257251
9W	3000 K	810 lm	10°,25°,40°	257241
18W	3000 K	1620 lm	10°,25°,40°	257252
9W	4000 K	891 lm	10°,25°,40°	257242
18W	4000 K	1782 lm	10°,25°,40°	257253
9W	6000 K	898 lm	10°,25°,40°	257243
18W	6000 K	1795 lm	10°,25°,40°	257254
CDMR-111 35W		Gx8,5	10°,40°	257211
CDMR-111 70W		Gx8,5	10°,40°	257231

Asymmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	810 lm	10°,25°,40°	256304
18W	2700 K	1620 lm	10°,25°,40°	256331
9W	3000 K	810 lm	10°,25°,40°	256301
18W	3000 K	1620 lm	10°,25°,40°	256332
9W	4000 K	891 lm	10°,25°,40°	256302
18W	4000 K	1782 lm	10°,25°,40°	256333
9W	6000 K	898 lm	10°,25°,40°	256303
18W	6000 K	1795 lm	10°,25°,40°	256334
CDMR-111 35W		Gx8,5	10°,40°	256311
CDMR-111 70W		Gx8,5	10°,40°	256321

NEPTUN 3

SURFACE MOUNTED FIXTURES

IP65 IK10

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Neptun Surface Mounted Uplighter, completely made of aluminium steel is ideal for areas where corrosive agents such as salt water or fertilizers would harm aluminium fixtures. The fixture can be mounted without harm to any surface and therefore is ideal for protected and historical sites where mounting recessed fixtures is not permitted.

Body

Die cast aluminium

Diffusers

4 mm Tempered Glass

Paint

Electrostatic powder


Gaskets

Silicone



Screws

316L Stainless steel

Asymmetrical




- Voltage** : 240V A.C with integrated driver
(24V AC or DC on request)
- Diffuser** : 12 mm Clear Glass (Frosted Glass on request)
- Mac Adam** : 3
- CRI** : >80 or >90
- Cable** : Potted 1 m 3x1 H03 VV-F




Single color LED options upon request are ;

Blue Amber Green Red

Asymmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	259005
6W LED	3000 K	570 lm	10°,25°,40°	259001
6W LED	4000 K	580 lm	10°,25°,40°	259002
6W LED	6000 K	592 lm	10°,25°,40°	259003
18W LED	RGB		25°,40°	259004



Honeycomb
Code No: 953523

BELKIS 5

SURFACE MOUNTED FIXTURES

IP67 IK10

The Belkis Surface Mounted Uplighter, completely made of 316L stainless steel is ideal for areas where corrosive agents such as salt water or fertilizers would harm aluminium fixtures. The fixture can be mounted without harm to any surface and therefore is ideal for protected and historical sites where mounting recessed fixtures is not permitted.

Cover

316L Stainless steel

Outer Body

316L Stainless steel

Inner Body

Die cast aluminium

Diffusers

8 mm Tempered Glass

Gaskets

Silicone


Screws

316L Stainless Steel




Voltage	: 240V A.C with integrated driver (24V AC or DC on request)
Diffuser	: 12 mm Clear Glass (Frosted Glass on request)
Mac Adam	: 3
CRI	: >80 or >90
Cable	: Potted 1 m 3x1 H03 VV-F

Asymmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
13W COB LED	2700 K	1235 lm	Asymmetrical	333004
13W COB LED	3000 K	1235 lm	Asymmetrical	333001
13W COB LED	4000 K	1259 lm	Asymmetrical	333002
13W COB LED	6000 K	1284 lm	Asymmetrical	333003



Honeycomb
Code No: 953525

TEOS

SURFACE DRIVE OVER FIXTURES

Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Teos 3 Surface Drive Over LED Fixture is specially designed to deliver high output LED light to ground surfaces of roads, carparks and pathways. This heavy duty fixture is designed to withstand the weight of large vehicles. Its robust construction allows for a maximum static load of 5000kg. The body and head of the fixture are made of die cast aluminium, while the recessing tube is made of steel to withstand the repeated impact of driving vehicles' tires. The high power LEDs are positioned and angled to provide maximum light output. The electronic LED driver is housed in the base of the fixture. The fixture comes with 2 x PG13.5 cable glands and 0.5m cable.

Cover

Die cast aluminium

Body

Die cast aluminium

Gaskets

Silicone

Diffusers

Polycarbonate

Screws

316L Stainless steel

Glands

2 x PG 13.5

Cable

0.5m 3x0,75 mm H05VV-F




LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

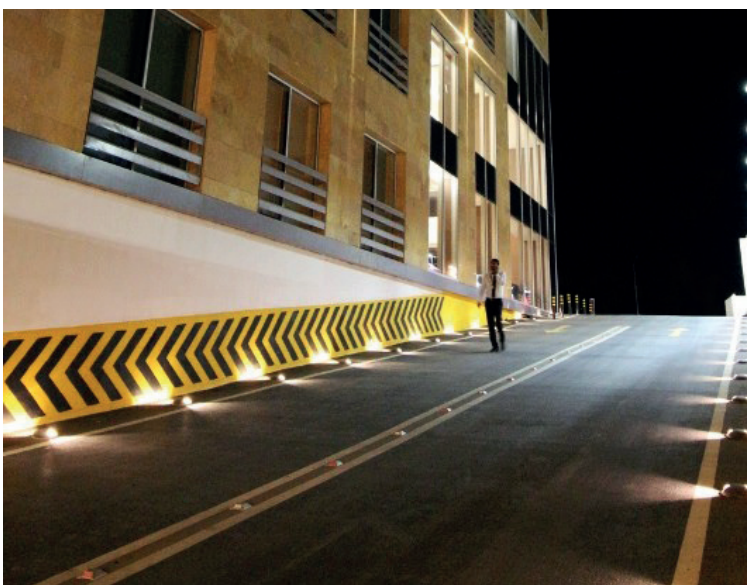



TEOS 3

SURFACE DRIVE OVER FIXTURES


Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors


7004	7016	9005	9016	6002	1015
------	------	------	------	------	------



Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F




Mono



Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180203
1x 4W	3000 K	1x 380 lm	180201
1x 4W	4000 K	1x 380 lm	180202




Duo 1-way



Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180213
1x 4W	3000 K	1x 380 lm	180211
1x 4W	4000 K	1x 380 lm	180212




Duo 2-way




Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180223
1x 4W	3000 K	1x 380 lm	180221
1x 4W	4000 K	1x 380 lm	180222




Trio




Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180233
1x 4W	3000 K	1x 380 lm	180231
1x 4W	4000 K	1x 380 lm	180232



Quad



Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180243
1x 4W	3000 K	1x 380 lm	180241
1x 4W	4000 K	1x 380 lm	182242

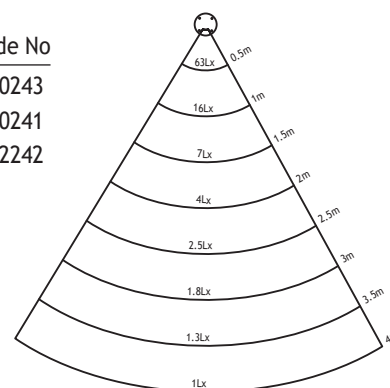

Lux levels for one aperture at 3000K



MIRA

SURFACE MOUNTED FIXTURES

Class I IP67 IK10

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Mira series consists of a range of LED, fluorescent and metal halide sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for drive over up to 20 kN including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Cover

316L Stainless steel

Body

Die cast aluminium

Diffusers

12 mm Tempered Glass

Gaskets

Silicone

Screws

316L Stainless steel

Recessing Box

Stainless steel



“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.




MIRA

SURFACE MOUNTED FIXTURES

Class I IP67 IK10

Available in any
of these RAL colors




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 12 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;


Blue Amber Green Red

MIRA 1 Short Bracket




Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	430202
12W	3000 K	1140 lm	10°,25°,40°	430201
12W	4000 K	1160 lm	10°,25°,40°	430206
12W	6000 K	1185 lm	10°,25°,40°	430207
27W	RGB	Red Green Blue	25°,40°	430241

MIRA 1 Long Bracket




Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	430312
12W	3000 K	1140 lm	10°,25°,40°	430311
12W	4000 K	1160 lm	10°,25°,40°	430316
12W	6000 K	1185 lm	10°,25°,40°	430317
27W	RGB	Red Green Blue	25°,40°	430341

MIRA 2 Short Bracket



Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	430802
36W	3000 K	3420 lm	10°,25°,40°	430801
36W	4000 K	3488 lm	10°,25°,40°	430806
36W	6000 K	3557 lm	10°,25°,40°	430807
81W	RGB	Red Green Blue	25°,40°	430821
70W	METAL HALIDE G12			430841

MIRA 2 Long Bracket



Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	430902
36W	3000 K	3420 lm	10°,25°,40°	430901
36W	4000 K	3488 lm	10°,25°,40°	430906
36W	6000 K	3557 lm	10°,25°,40°	430907
81W	RGB	Red Green Blue	25°,40°	430921
70W	METAL HALIDE G12			430941

KARIA

SURFACE MOUNTED FIXTURES

Class I IP65 IK07

Available in these 2 colors



The Karia series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of an anodized extrusion aluminium body with polyamid side covers. Polyamid brackets are used to mount the fixtures. Stainless steel brackets are also available to increase the distance from the mounting surface if necessary. The fixtures come with integrated electronic ballasts and LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

Anodized Aluminium profile with polyamid 66 side covers

Mounting Brackets

Polyamide 66 (Stainless Steel on request)

Screws

Stainless steel

Diffusers

4 mm Tempered Glass

Gaskets

Silicone

Gland

2 cable Gland for 5-8 mm Ø cable

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.




KARIA

SURFACE MOUNTED FIXTURES

Class I IP67 IK07

Available in these 2 colors




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;



Blue Amber Green Red

Karia 1 400mm

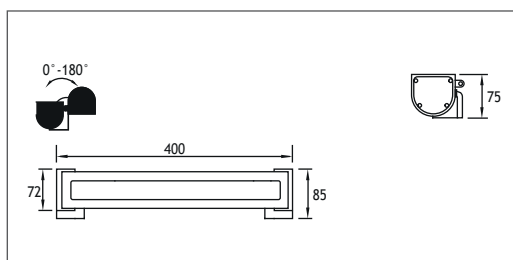



Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	431102
12W	3000 K	1140 lm	10°,25°,40°	431101
12W	4000 K	1162 lm	10°,25°,40°	431106
12W	6000 K	1186 lm	10°,25°,40°	431107
27W	RGB		25°,40°	431601

Karia 2 750mm

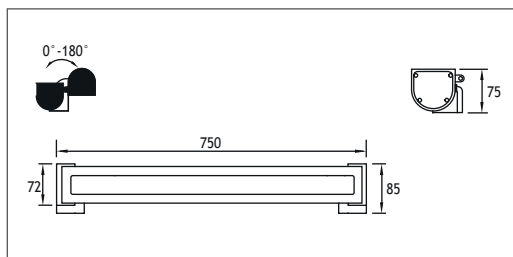

Power	Kelvin	Real Lumen Output	Lens	Code No
24W	2700 K	2280 lm	10°,25°,40°	431202
24W	3000 K	2280 lm	10°,25°,40°	431211
24W	4000 K	2325 lm	10°,25°,40°	431216
24W	6000 K	2372 lm	10°,25°,40°	431217

Karia 3 1050mm

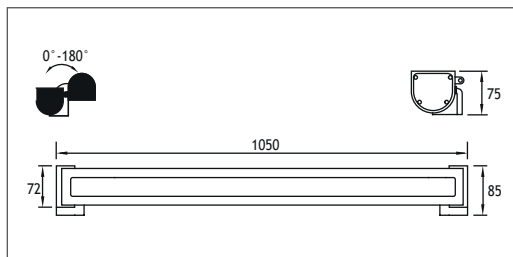

Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	431244
36W	3000 K	3420 lm	10°,25°,40°	431241
36W	4000 K	3488 lm	10°,25°,40°	431242
36W	6000 K	3558 lm	10°,25°,40°	431243
81W	RGB		25°,40°	431251

SANTA

SURFACE MOUNTED FIXTURES

Class I IP65 IK08

Available in these 2 colors



The Santa series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of an anodized extrusion aluminium body with polyamid side covers. Polyamid brackets are used to mount the fixtures. Stainless steel brackets are also available to increase the distance from the mounting surface if necessary. The fixtures come with integrated electronic ballasts and LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

Anodized Aluminium profile with polyamid 66 side covers

Mounting Brackets

Stainless Steel on request

Screws

Stainless steel

Diffusers

Acrylic Diffuser

Gaskets

Silicone

Gland

2 cable Gland for 5-8 mm Ø cable

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

SANTA

SURFACE MOUNTED FIXTURES

Class I IP65 IK08

Available in these 2 colors




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;


● Blue
 ● Amber
 ● Green
 ● Red

Santa 1 320mm

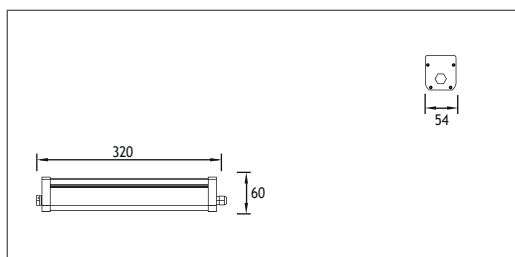


Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	444001
12W	3000 K	1140 lm	10°,25°,40°	444002
12W	4000 K	1162 lm	10°,25°,40°	444003
12W	6000 K	1186 lm	10°,25°,40°	444004

Santa 2 620mm

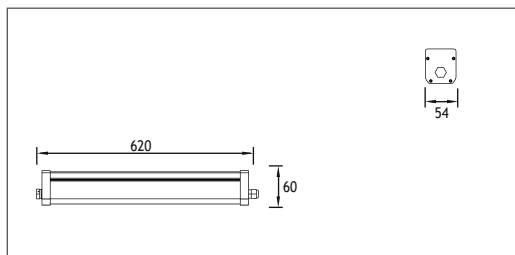


Power	Kelvin	Real Lumen Output	Lens	Code No
24W	2700 K	2280 lm	10°,25°,40°	444101
24W	3000 K	2280 lm	10°,25°,40°	444102
24W	4000 K	2325 lm	10°,25°,40°	444103
24W	6000 K	2372 lm	10°,25°,40°	444104

Santa 3 940mm

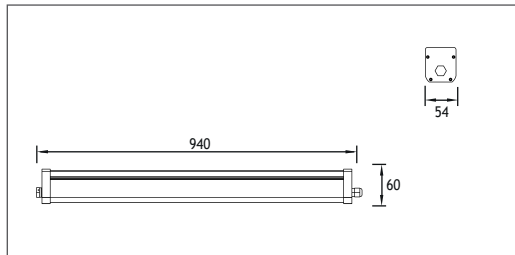

Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	444201
36W	3000 K	3420 lm	10°,25°,40°	444202
36W	4000 K	3488 lm	10°,25°,40°	444203
36W	6000 K	3558 lm	10°,25°,40°	444204

Santa 4 1200mm

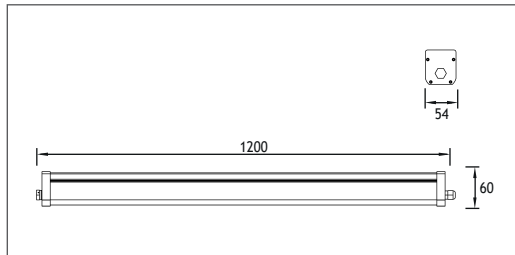


Power	Kelvin	Real Lumen Output	Lens	Code No
48W	2700 K	4560 lm	10°,25°,40°	444301
48W	3000 K	4560 lm	10°,25°,40°	444302
48W	4000 K	4670 lm	10°,25°,40°	444303
48W	6000 K	4780 lm	10°,25°,40°	444304

SLIM PYRAMID

WALL SURFACE FIXTURES IP65 IK08

Available in any
of these RAL colors



Cover & Body

Glass reinforced polyester

Screws

Inox

Gasket

Silicone

Glass

Tempered



Recessing Box

Galvanized steel


Voltage : 240 VAC with integrated driver
(24V AC or DC on request)

Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical

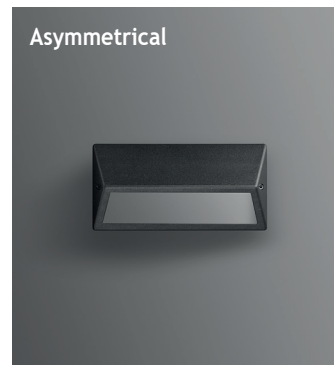

Asymmetrical




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	503603
9W	LED	3000 K	503601
9W	LED	4000 K	503602
9W	LED	6000 K	503604
1x 9W FLUO.	G24 d-1		503501

SIDE WALL SURFACE FIXTURES

IP65 IK08


Available in any
of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate



Voltage : 240V A.C with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Side 1





Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	505211
9W	LED	3000 K	505212
9W	LED	4000 K	505213
9W	LED	6000 K	505214
75W HALOGEN	E27		505201
1x 26W FLUO.	G24 d-3		505221

Side 2



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	507211
9W	LED	3000 K	507212
9W	LED	4000 K	507213
9W	LED	6000 K	507214
75W HALOGEN	E27		507201
1x 26W FLUO.	G24 d-3		507221

Side 3




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	506211
9W	LED	3000 K	506212
9W	LED	4000 K	506213
9W	LED	6000 K	506214
75W HALOGEN	E27		506201
1x 26W FLUO.	G24 d-3		506221

PERGE

WALL SURFACE FIXTURES IP65 IK08


Available in any
of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Perge 1





Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	515211
9W	LED	3000 K	515212
9W	LED	4000 K	515213
9W	LED	6000 K	515214
75W HALOGEN	E27		515201
1x 26W FLUO.	G24 d-3		515221

Perge 2



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	517211
9W	LED	3000 K	517212
9W	LED	4000 K	517213
9W	LED	6000 K	517214
75W HALOGEN	E27		517201
1x 26W FLUO.	G24 d-3		517221

Perge 3




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	516211
9W	LED	3000 K	516212
9W	LED	4000 K	516213
9W	LED	6000 K	516214
75W HALOGEN	E27		516201
1x 26W FLUO.	G24 d-3		516221

MILET WALL SURFACE FIXTURES

IP65 IK08

Available in any
of these RAL colors



Cover

Die cast aluminium / Inox (Stainless steel)

Paint

Black or grey electrostatic powder

Body

Die cast aluminium

Connection


Sealed crimp splices

Gaskets

Silicone


Diffusers

4 mm Tempered Glass

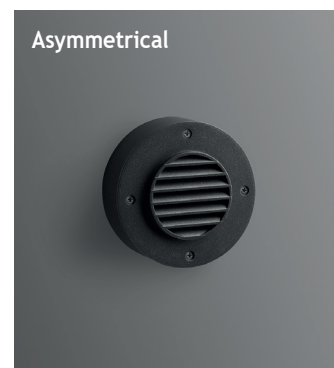


The Milet Surface Mounted Series is specially designed to deliver low glare halogen lighting to steps, open areas, corridors and pathways. The fixture has a die cast aluminium body painted with electrostatic powder paint. The slated or open covers come in an aluminium or aluminium / stainless steel finish. The cable on site can be securely connected to the fixture via a sealed crimp splice.

Symmetrical



Power	Lampholder	Reflector	Code No	
			Alum.	Inox
40W HALOGEN	G 9	-	312111	314111

Asymmetrical



Power	Lampholder	Reflector	Code No	
			Alum.	Inox
40W HALOGEN	G 9	-	310111	311111




MILET

INDIRECT SURFACE MOUNTED FIXTURE

Class I IP55 IK08

Available in any
of these RAL colors



The Milet Indirect series consists of an on-wall fixture and a bollard using LED, halogen or fluorescent. The fixtures are made of a combination of a die cast aluminium head and an aluminium pipe painted with electrostatic powder paint. The wall fixture allows for a custom made sign showing room numbers or names. For the LED versions, a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. For the halogen and fluorescent versions, an IP connection box is provided to allow for a secure connection of the on-site cable.

Cover

Die cast aluminium

Paint

Black or grey electrostatic powder

Body

Die cast aluminium

Connection


IP connection box

Gaskets

Silicone

Diffusers


Polycarbonate



Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Diffuser : Polycarbonate

Cable : Potted 1 m 3x1 H03 VV-F



Power	Lampholder	Kelvin	Code No
11W	LED	2700 K	290102
11W	LED	3000 K	290101
11W	LED	4000 K	290103
11W	LED	6000 K	290104
40W HALOGEN	G 9		290201



Special Application

For room numbers, names, signs etc.
The acrylic part inside can be colour
of choice.




CODE NO 295115
ELECTR. CIR. FLUO. 6W

SQUARE MINI

LED APPLIQUES LED DRIVER IN HADE Class I IP65 IK10

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Gaskets

Silicone

Diffusers

Tempered Glass

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

POWER LED (COB LED options available)



Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;

Blue Amber Green Red



240V Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	298004
1W LED	3000 K	95 lm	10°,25°,40°	298001
1W LED	4000 K	97 lm	10°,25°,40°	298002
1W LED	6000 K	99 lm	10°,25°,40°	298003
3W LED	2700 K	285 lm	10°,25°,40°	298014
3W LED	3000 K	285 lm	10°,25°,40°	298011
3W LED	4000 K	290 lm	10°,25°,40°	298012
3W LED	6000 K	296 lm	10°,25°,40°	298013

12-24V Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	298024
6W LED	3000 K	570 lm	10°,25°,40°	298021
6W LED	4000 K	585 lm	10°,25°,40°	298022
6W LED	6000 K	592 lm	10°,25°,40°	298023




Honeycomb
Code No: 953541

BELKIS 1 LL

WALL SURFACE FIXTURES

IP65 IK08

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Diffusers


Tempered Glass 4 mm

Gaskets

Silicone




The Belkis 1 LLS is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 2 different tones of white, 3000K and 4000K.




- Led** : Linear LEDs
- Voltage** : 240 VAC with integrated driver
(12-24 VDC on request)
- Diffuser** : 4 mm Tempered Glass
- Mac Adam** : 3
- CRI** : >80 or >90
- Cable** : Potted 1 m 3x1 H03 VV-F

Asymmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424143
3W	3000 K	285 lm	424141
3W	4000 K	290 lm	424142
3W	6000 K	296 lm	424144

Symmetrical



Power	Kelvin	Real Lumen Output	Code No	
			Milky Glass	Clear Glass
3W	2700 K	285 lm	424143	424163
3W	3000 K	285 lm	424141	424161
3W	4000 K	290 lm	424142	424162
3W	6000 K	296 lm	424144	424164




SATURN LL

WALL SURFACE FIXTURES

IP65 IK08

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Diffusers


Tempered Glass 4 mm

Gaskets

Silicone



The Saturn 1 LLS is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 2 different tones of white, 3000K and 4000K.



Led : COB LEDs

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)


Diffuser : 4 mm Tempered Glass Clear Glass or Milky Glass

Mac Adam : 3

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	526003
3W	3000 K	285 lm	526001
3W	4000 K	290 lm	526002
3W	6000 K	296 lm	526004

Symmetrical




Power	Kelvin	Real Lumen Output	Code No	
			Milky Glass	Clear Glass
3W	2700 K	285 lm	526203	526103
3W	3000 K	285 lm	526201	526101
3W	4000 K	290 lm	526202	526102
3W	6000 K	296 lm	526204	526104



LYKIA LL

WALL SURFACE FIXTURES IP65 IK08

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Diffusers

Tempered Glass 4 mm

Gaskets

Silicone

The LYKIA LL is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 2 different tones of white, 3000K and 4000K.

Led : Linear LEDs



Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : 4 mm Tempered Glass Clear Glass or Milky Glass


Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F




Asymmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424202
3W	3000 K	285 lm	424201
3W	4000 K	290 lm	424203
3W	6000 K	296 lm	424204



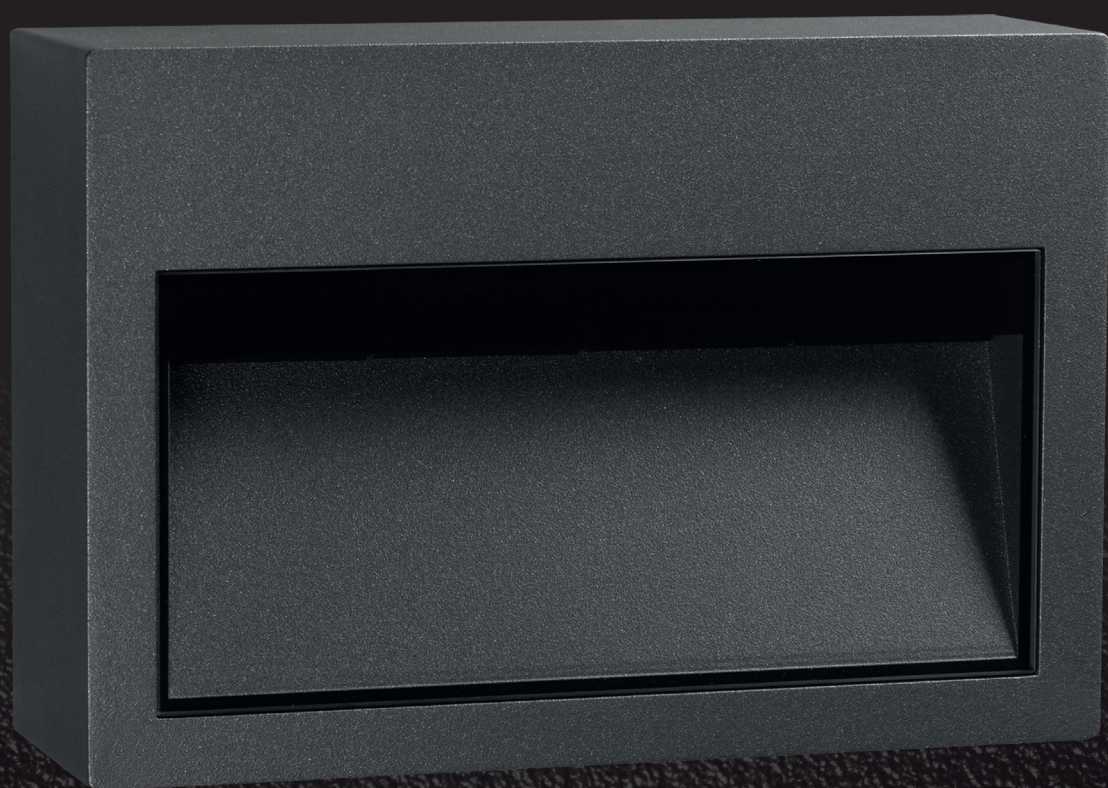

EMFA

MILET ANI

WALL SURFACE Class I IP67 IK08

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Ani surface mounted series is specially designed to deliver low-glare lighting to facades, walkways, pathways and driveways with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LED's. The Linear LEDs with special lenses gives excellent wallwashing effect. An anti-slip glass is available upon request.

Cover

316L Stainless steel or Aluminium

Body

Die cast aluminium

Gaskets

Silicone

Diffusers


4 mm Tempered Glass

Screws

316L Stainless Steel

Glands



PG 11

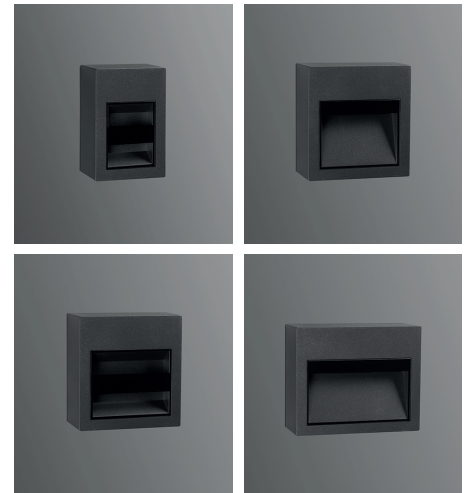

"Customization" is EMFA's standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, and available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Symmetrical

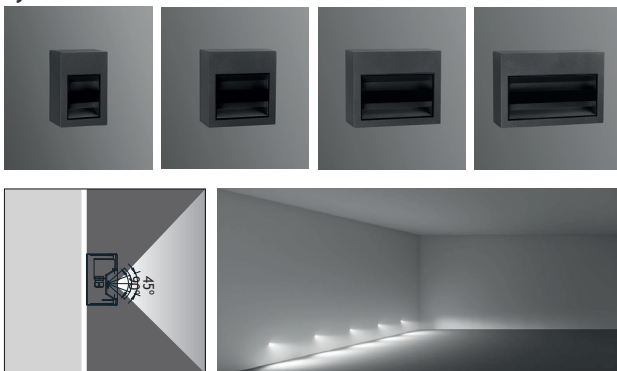

Galvanized
Surface Box




end of the code
number "s" add
for Screw
mounting option for

LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Asymmetrical

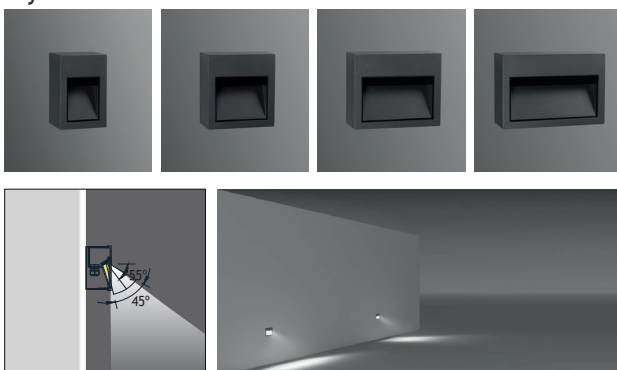

Asym. Glass



Trenched Glass




Milky Glass



Clear Glass



Available in any
of these RAL colors



Symmetrical




Asymmetrical




Led : Linear LEDs
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
6W	2700 K	570 lm	457003	457503
12W	2700 K	1140 lm	457013	457513
6W	3000 K	570 lm	457001	457501
12W	3000 K	1140 lm	457011	457511
6W	4000 K	690 lm	457002	457502
12W	4000 K	1195 lm	457012	457512

ANI 2




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
12W	2700 K	1140 lm	457103	457603
24W	2700 K	2280 lm	457113	457613
12W	3000 K	1140 lm	457101	457601
24W	3000 K	2280 lm	457111	457611
12W	4000 K	1254 lm	457102	457602
24W	4000 K	2320 lm	457112	457612

ANI 3




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
18W	2700 K	1710 lm	457203	457703
36W	2700 K	3420 lm	457213	457713
18W	3000 K	1710 lm	457201	457701
36W	3000 K	3420 lm	457211	457711
18W	4000 K	1790 lm	457202	457702
36W	4000 K	3520 lm	457212	457712

ANI 4



Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
24W	2700 K	2280 lm	457303	457803
36W	2700 K	3420 lm	457313	457813
24W	3000 K	2280 lm	457301	457801
36W	3000 K	3420 lm	457311	457811
24W	4000 K	2320 lm	457302	457802
36W	4000 K	3520 lm	457312	457812



Galvanized
Recessing Box

Symmetrical




Asymmetrical




Led : Linear LEDs
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
6W	2700 K	570 lm	454003	454503
12W	2700 K	1140 lm	454013	454513
6W	3000 K	570 lm	454001	454501
12W	3000 K	1140 lm	454011	454511
6W	4000 K	690 lm	454002	454502
12W	4000 K	1195 lm	454012	454512

ANI 2




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
12W	2700 K	1140 lm	454103	454603
24W	2700 K	2280 lm	454113	454613
12W	3000 K	1140 lm	454101	454601
24W	3000 K	2280 lm	454111	454611
12W	4000 K	1254 lm	454102	454602
24W	4000 K	2320 lm	454112	454612

ANI 3




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
18W	2700 K	1710 lm	454203	454703
36W	2700 K	3420 lm	454213	454713
18W	3000 K	1710 lm	454201	454701
36W	3000 K	3420 lm	454211	454711
18W	4000 K	1790 lm	454202	454702
36W	4000 K	3520 lm	454212	454712

ANI 4



Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
24W	2700 K	2280 lm	454303	454803
36W	2700 K	3420 lm	454313	454813
24W	3000 K	2280 lm	454301	454801
36W	3000 K	3420 lm	454311	454811
24W	4000 K	2320 lm	454302	454802
36W	4000 K	3520 lm	454312	454812





TAROS 2

SURFACE LED FIXTURES

Class I IP55 IK08

Available in any of these RAL colors


7004	7016	9005	9016	6002	1015
------	------	------	------	------	------



Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F



Single color LED options upon request are ;
 Blue  Amber  Green  Red

Mono





Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	443001
1x 4W	3000 K	1x 380 lm	443002
1x 4W	4000 K	1x 418 lm	443003
1x 4W	6000 K	1x 418 lm	443004

Dual





Power	Kelvin	Real Lumen Output	Code No
2x 4W	2700 K	2x 380 lm	443101
2x 4W	3000 K	2x 380 lm	443102
2x 4W	4000 K	2x 392 lm	443103
2x 4W	6000 K	2x 392 lm	443104

Tiro




Power	Kelvin	Real Lumen Output	Code No
3x 4W	2700 K	2x 380 lm	443201
3x 4W	3000 K	2x 380 lm	443202
3x 4W	4000 K	2x 392 lm	443203
3x 4W	6000 K	2x 392 lm	443204

Quad



Power	Kelvin	Real Lumen Output	Code No
4x 4W	2700 K	3x 380 lm	443301
4x 4W	3000 K	3x 380 lm	443302
4x 4W	4000 K	3x 392 lm	443303
4x 4W	6000 K	3x 392 lm	443304

 Selge Applique

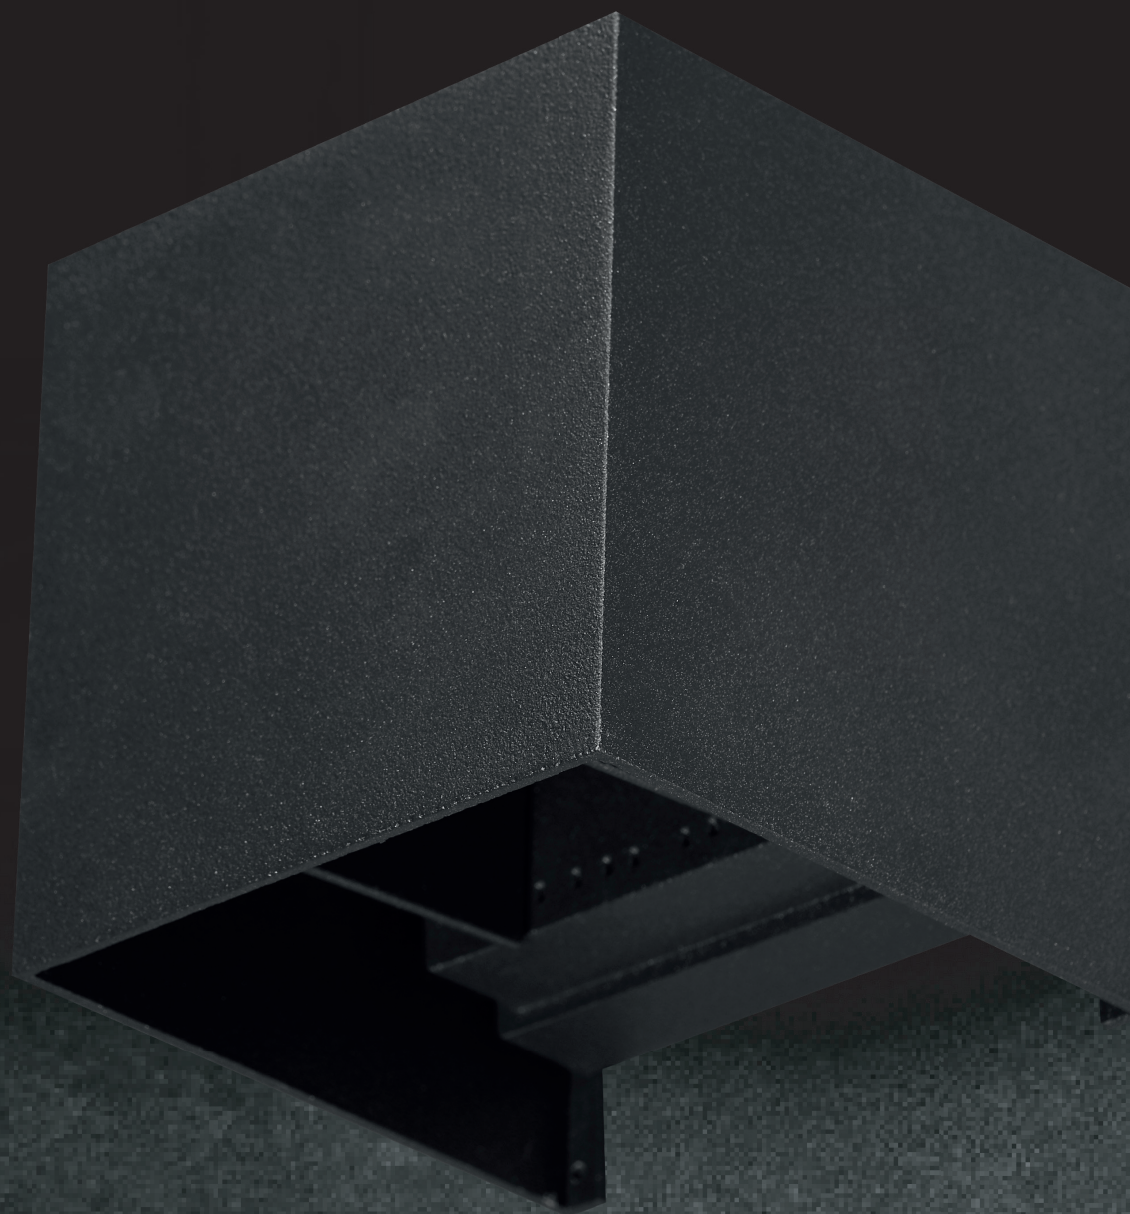

EMFA

SELGE

ADJUSTABLE TWO WAY LED APPLIQUES

Class I IP65

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Selge Adjustable Applique series consists of a range of LED light sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Outer Body

Extruded aluminium

Body

Die cast aluminium

Paint

Electrostatic powder

Bracket



Die cast aluminium

Diffuser

Tempered Glass or acrylic

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, and available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



Adjustable





Led : Linear LEDs

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : 3mm Tempered Clear Glass or Milky Glass


Mac Adam : 3

CRI : >80 or >90



Power	Kelvin	Real Lumen Output	Code No
2x 3W	2700 K	2x 285 lm	108004
2x 3W	3000 K	2x 285 lm	108001
2x 3W	4000 K	2x 290 lm	108002
2x 3W	6000 K	2x 296 lm	108003

Silyon Wall Surface

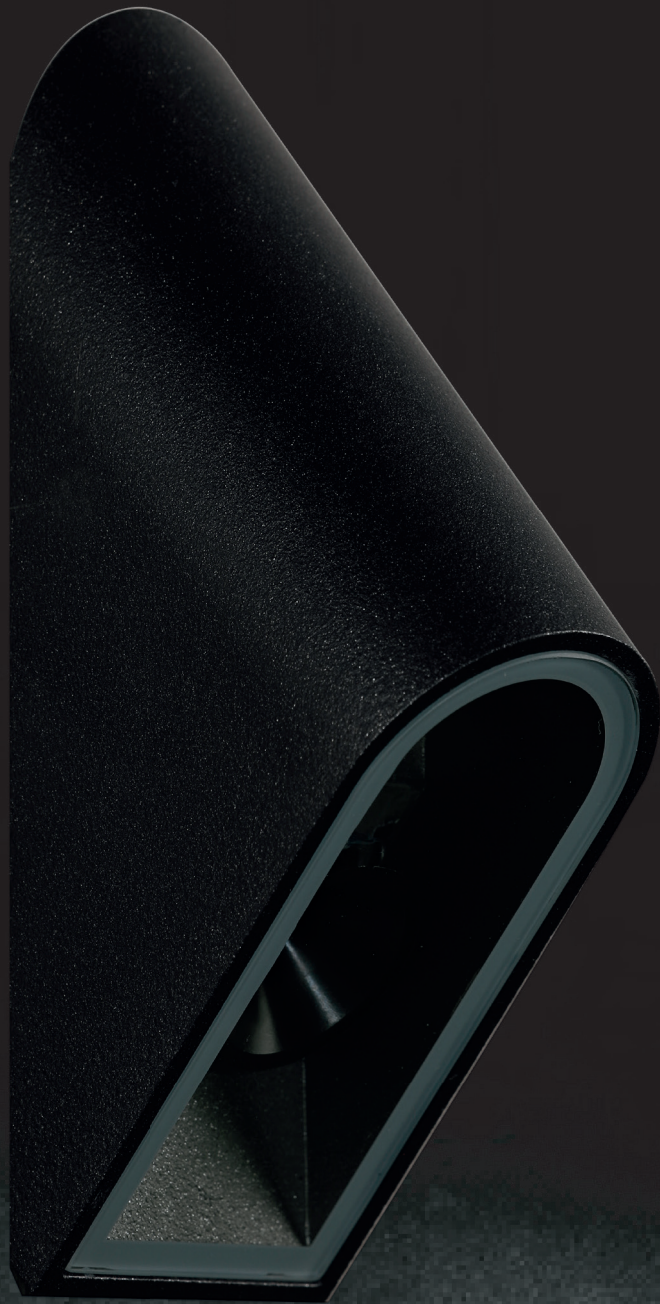

EMFA

SILYON

LED SURFACE MOUNTED Class I IP65

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Silyon Surface Mount series consists of a range of LED light sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

Die cast aluminium

Paint

Electrostatic powder

Base

316L Stainless Steel

Diffuser

Tempered Glass or acrylic

Led : Power LEDs

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)



Diffuser : Polycarbonate

CRI : >80 or >90

Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;

Blue Amber Green Red

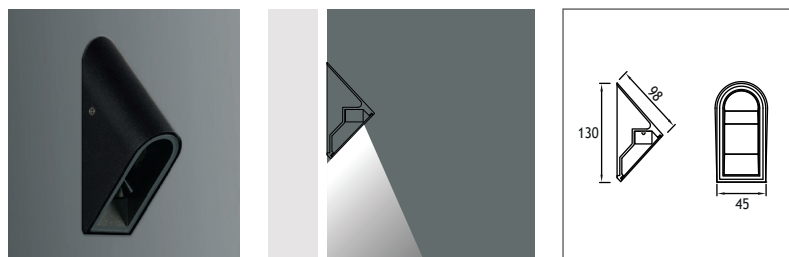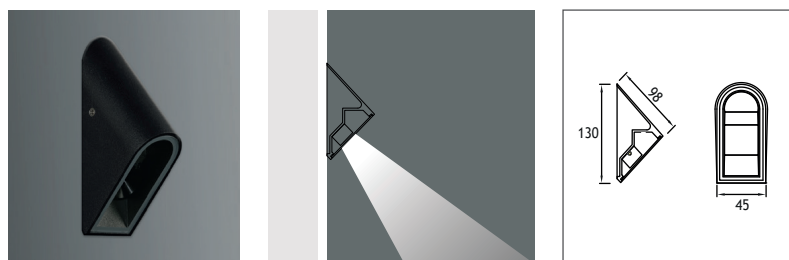

Power	Kelvin	Real Lumen Output		Code No	
		1W	3W	1W	3W
LED	2700 K	95 lm	285 lm	109011	109004
LED	3000 K	95 lm	285 lm	109012	109001
LED	4000 K	97 lm	290 lm	109013	109002
LED	6000 K	99 lm	296 lm	109014	109003

Power	Kelvin	Real Lumen Output		Code No	
		1W	3W	1W	3W
LED	2700 K	95 lm	285 lm	109111	109104
LED	3000 K	95 lm	285 lm	109112	109101
LED	4000 K	97 lm	290 lm	109113	109102
LED	6000 K	99 lm	296 lm	109114	109103

LEON

LED SURFACE MOUNTED

Class I IP65

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Leon combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The bollard is designed to light pathways, landscapes and open spaces. The Leon bollard gives light only in the downward direction. This avoids any kind of glare and light pollution. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 12W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete or a picket to mount into the earth.

Head

Die cast aluminium

Diffusers


Frosted polyamide 6.6

Pipe




Extrusion aluminium

Paint

Electrostatic powder

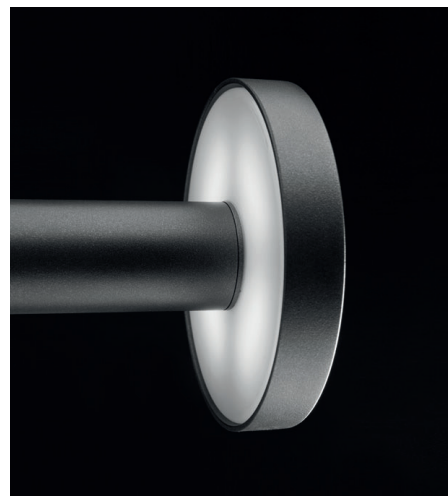

Led : Circular LEDs (6W or 12W)
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : Polyamide
CRI : >80
Cable : Potted 1m 3x1 H03 VV-F



Power	Kelvin	Real Lumen Output		Code No	
		6W	12W	6W	12W
LED	2700 K	570 lm	1140 lm	179001	179011
LED	3000 K	570 lm	1140 lm	179002	179012
LED	4000 K	582 lm	1162 lm	179003	179013
LED	6000 K	591 lm	1185 lm	179004	179014



Ceramus Mini Applique

Ø43mm




CERAMUS MINI

LED APPLIQUES

Class I IP65

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Bracket

Die cast aluminium

Diffuser

Tempered Glass or acrylic

Gaskets

Silicon

POWER LEDs

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)




Lens : 10°, 20° or 30°

CRI : >80 or >90


Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;


Blue Amber Green Red



Power	Kelvin	Real Lumen Output		Lens	Code No	
		1W	3W		1W	3W
LED	2700 K	95 lm	285 lm	10°,25°,40°	463004	463014
LED	3000 K	95 lm	285 lm	10°,25°,40°	463001	463011
LED	4000 K	97 lm	290 lm	10°,25°,40°	463002	463012
LED	6000 K	99 lm	296 lm	10°,25°,40°	463003	463013



Power	Kelvin	Real Lumen Output		Lens	Code No	
		1W	3W		1W	3W
LED	2700 K	95 lm	285 lm	10°,25°,40°	463104	463114
LED	3000 K	95 lm	285 lm	10°,25°,40°	463101	463111
LED	4000 K	97 lm	290 lm	10°,25°,40°	463102	463112
LED	6000 K	99 lm	296 lm	10°,25°,40°	463103	463113



Honeycomb
Code No: 953511

Ceramus 2 Applique

Ø80mm




CERAMUS 2

LED APPLIQUES

Class I IP65

Available in any
of these RAL colors



Body

Die cast aluminium

Paint

Electrostatic powder

Bracket

Die cast aluminium

Diffuser

Tempered Glass or acrylic

Gaskets

Silicon

COB LED



Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


Lens : 10°, 20° or 30°

CRI : >80 or >90

Cable : Potted 1m 3x1 H03 VV-F




One - Way




Power	Kelvin	Real Lumen Output		Lens	Code No	
		6W	12W		6W	12W
LED	2700 K	570 lm	1140 lm	10°,20°,30°	464004	464014
LED	3000 K	570 lm	1140 lm	10°,20°,30°	464001	464011
LED	4000 K	582 lm	1162 lm	10°,20°,30°	464002	464012
LED	6000 K	591 lm	1185 lm	10°,20°,30°	464003	464013



Two - Way



Power	Kelvin	Real Lumen Output		Lens	Code No	
		2x 6W	2x 12W		6W	12W
LED	2700 K	570 lm	1140 lm	10°,20°,30°	464104	464114
LED	3000 K	570 lm	1140 lm	10°,20°,30°	464101	464111
LED	4000 K	582 lm	1162 lm	10°,20°,30°	464102	464112
LED	6000 K	591 lm	1185 lm	10°,20°,30°	464103	464113



Honeycomb
Code No: 953522



BELKIS

APPLIQUES

Class I IP55 IK08

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Belkis Applique series consists of a range of LED, metal halide and halogen sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

Aluminium Profile

Cover

Die cast aluminium

Paint

Electrostatic powder

Bracket

Die cast aluminium

Diffusers

Tempered Glass

Gaskets

Silicone

Connection


IP connection box




“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

One Way



Two Way



LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management


All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

BELKIS

APPLIQUES

Class I IP55 IK08

Available in any
of these RAL colors



Power LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;


Blue Amber Green Red

BELKIS 1




Power	Kelvin	Real Lumen Output	Lens	Code No	
				One Way	Two Way
1W	2700 K	95 lm	10°,25°,40°	425102	425112
1W	3000 K	95 lm	10°,25°,40°	425101	425111
1W	4000 K	97 lm	10°,25°,40°	425106	425116
1W	6000 K	99 lm	10°,25°,40°	425107	425117
25W	HALOGEN	G9		340101	343101

BELKIS 2




Power	Kelvin	Real Lumen Output	Lens	Code No	
				One Way	Two Way
3W	2700 K	285 lm	10°,25°,40°	425122	425152
3W	3000 K	285 lm	10°,25°,40°	425121	425131
3W	4000 K	290 lm	10°,25°,40°	425126	425136
3W	6000 K	296 lm	10°,25°,40°	425127	425137
35W	HALOGEN	Gu10		341111	344111

BELKIS 5




Power	Kelvin	Real Lumen Output	Lens	Code No	
				One Way	Two Way
9W	2700 K	810 lm	10°,25°,40°	425142	425152
9W	3000 K	810 lm	10°,25°,40°	425141	425151
9W	4000 K	891 lm	10°,25°,40°	425146	425156
9W	6000 K	898 lm	10°,25°,40°	425147	425157
75W	HALOGEN	E27		342111	345111

BELKIS 5 M.H.



Power	Lampholder	Code No	
		One Way	Two Way
35W METAL HALIDE	G12	346401	346501
70W METAL HALIDE	G12	346411	346511



Honeycomb
Belkis 1: 953521
Belkis 2: 953522
Belkis 5: 953525




BELKIS 1

ACRYLIC APPLIQUES


Class I IP55 IK08

Available in any
of these RAL colors




Voltage : 240 VAC with integrated driver
Diffuser : Acrylic Pipe
Transformer : Electronic
Cable : Potted 1 m 3x1 H03 VV-F

One Way




Power	Lampholder	Code No
COMPACT FLUO. 13W	G24 q - 1	293301

Two Way




Power	Lampholder	Code No
COMPACT FLUO. 2x 13W	2x G24 q - 1	293401

Torch Acrylic



Power	Lampholder	Code No
COMPACT FLUO. 13W	G24 q - 1	293201

Torch Acrylic



Power	Lampholder	Code No
50W HALOGEN	Gu 5,3	293251



SQUARE

APPLIQUES

Class I IP65 IK08

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

The Square Appliance series consists of a range of LED, metal halide and halogen sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

Die cast aluminium

Cover

Die cast aluminium

Paint

Electrostatic powder

Bracket

Die cast aluminium

Diffusers

Tempered Glass

Gaskets

Silicone

Connection


IP connection box



“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

One Way




LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.




Power LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
CRI : >80 or >90
Cable : -

Single color LED options upon request are ;


Blue Amber Green Red

Clear Glass with Lens




Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434024
6W	3000 K	570 lm	10°,25°,40°	434021
6W	4000 K	582 lm	10°,25°,40°	434022
6W	6000 K	591 lm	10°,25°,40°	434023

Frosted Glass




Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434013
6W	3000 K	570 lm	10°,25°,40°	434011
6W	4000 K	582 lm	10°,25°,40°	434012
6W	6000 K	591 lm	10°,25°,40°	434014

Dot



Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434003
6W	3000 K	570 lm	10°,25°,40°	434001
6W	4000 K	582 lm	10°,25°,40°	434002
6W	6000 K	591 lm	10°,25°,40°	434004



Honeoycomb
Code No: 953523

PEDESA

TWO WAY LED APPLIQUES

Class I IP65

Available in any of these RAL colors


7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

Body
Aluminium profile
Paint
Electrostatic powder
Bracket
Die Cast Aluminium
Diffusers
Acrylic
Gaskets
Silicone
Connection
IP connection box




Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : Acrylic
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Round




Power	Kelvin	Real Lumen Output	Code No	
			Aluminium	Acrylic
11W	2700 K	1045 lm	504003	504023
11W	3000 K	1045 lm	504001	504021
11W	4000 K	1065 lm	504002	504022
11W	6000 K	1089 lm	504004	504024

Round



Power	Kelvin	Real Lumen Output	Code No	
			Aluminium	Acrylic
11W	2700 K	1045 lm	504013	504033
11W	3000 K	1045 lm	504011	504031
11W	4000 K	1065 lm	504012	504032
11W	6000 K	1089 lm	504014	504034

Square




Power	Kelvin	Real Lumen Output	Code No	
			Aluminium	
11W	2700 K	1045 lm	504043	
11W	3000 K	1045 lm	504041	
11W	4000 K	1065 lm	504042	
11W	6000 K	1089 lm	504044	

SATURN

APPLIQUES Class I IP65 IK08


Available in any
of these RAL colors



Voltage : 240V A.C with integrated driver
Diffuser : Glass
Transformer : Electronic
Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;
● Blue ● Amber ● Green ● Red

Saturn 1




Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525101

Saturn 2



Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525201

Saturn 3



Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525301