


SATURN

SURFACE MOUNTED LED FIXTURES

Class I IP65 IK08

Available in any of these RAL colors



The Saturn is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 25mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The COB LED used comes in 2 different tones of white, 3000K and 4000K.

Body

Die cast aluminium

Paint

Electrostatic powder

Diffusers



Tempered Glass

Gaskets


Silicone



Asymmetrical

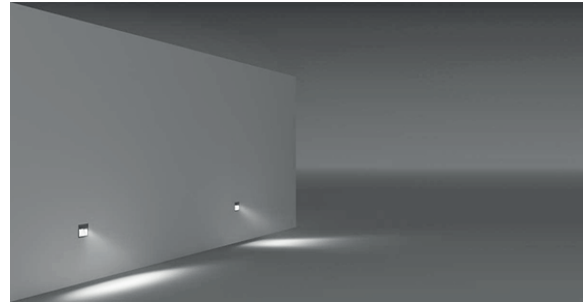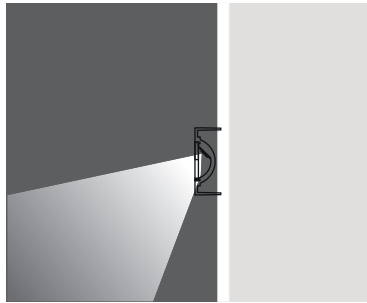

- Voltage** : 240V
- Diffuser** : Clear, Frosted And Milky Glass 4 mm
- Cable** : Potted 5 m 3x0,75 H03 VV-F



| 3W COB LED | | Total Lighting Output | Code No |
|-----------------|--------|-----------------------|---------|
| ☰ Natural White | 4000 K | 313 lm | 526002 |