


SQUARE



LED APPLIQUE

Class I IP65

Available in any of these RAL colors



- Body**
- Die cast aluminium
- Paint**
- Electrostatic powder
- Bracket**
- Die cast aluminium
- Diffuser**
- Tempered Glass or acrylic
- Gaskets**
- Silicone
- Connection**
- IP connection box

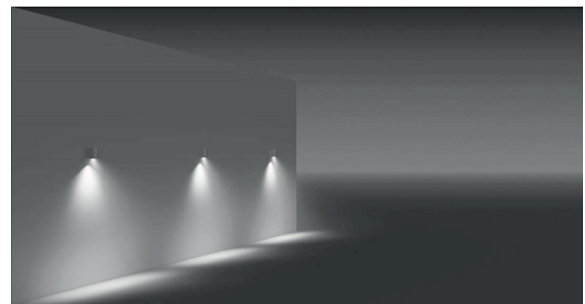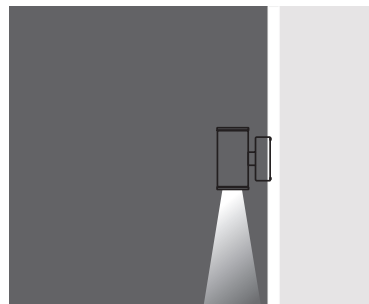

- Voltage** : 240V A.C with integrated driver
(24V AC or DC on request)
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

OSRAM SMD LED	Total Lighting Output		Code No
350 mA (6W) LED			
☀ Warm White	3000 K	640 lm	434011

