BELKIS

RECESSED WALK OVER LED FIXTURES
Class II IP67

EMFA's 20mA LED fixtures are ideal for ambiance lighting outdoors and in where only touch of light is required. These fixtures apart from being used as orientation lights, can light steps and paths and highlight walls and columns acrylic are offered to fit the correct location. A choice of lighting or backlighting LEDs is offered to either a directional lighting effect or a lighting glow.



"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Glass 6 mm


Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

Single color LED options upon request are ;
Blue Amber Green Red

BELKIS 1






Power	Code No Inox
9x20mA	418101

BELKIS 1






Power	Code No Inox
1x20mA	418111

BELKIS 2





Power	Code No Inox
18x20mA	418121

EMFA

BELKIS

WALL RECESSED LED FIXTURES
Class II IP67



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Cable : Potted 5 m 3x0,75 H03 VV-F

Finish : EMFA Anthracite · RAL 7039 / 7016 / 9005 / 9016 / 6013 / 8014 – other RAL on request

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.

Single color LED options upon request are ;

Blue Amber Green Red

BELKIS 0






Power	Code No Alum	Inox
6x20mA LIGHTING LEDS	416201	416211
6x20mA LIGHTING LEDS	417101	417111

BELKIS 0






Power	Code No Alum	Inox
9x20mA LIGHTING LEDS	416261	416271
9x20mA BACKLIGHTING LEDS	417191	417201

BELKIS 1






Power	Code No Alum	Inox
1x20mA BACKLIGHTING LEDS	407501	417351

BELKIS 2





Power	Code No
12x20mA LIGHTING LEDS	416281
4x20mA LIGHTING LEDS	416291
4x20mA BACKLIGHTING LEDS	416561
4x20mA BACKLIGHTING LEDS	416571

EMFA

BELKIS

SURFACE MOUNTED LED FIXTURES
Class II IP67



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic


Finish : EMFA Anthracite · RAL 7039 / 7016 / 9005 / 9016 / 6013 / 8014 – other RAL on request

Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;
Blue Amber Green Red

BELKIS 0






Power	Code No Alum	Inox
6x20mA LIGHTING LEDS	416221	416231
6x20mA BACKLIGHTING LEDS	417141	417151

BELKIS 0





Power	Code No Alum	Inox
9x20mA LIGHTING LEDS	417751	417761
9x20mA BACKLIGHTING LEDS	417271	417281

DYO WALL RECESSED LED FIXTURES
Class II IP67




Outer Frame & Body
Anodized aluminium
Recessing Box
Galvanized Steel

Voltage : 240V A.C (12V AC or DC, 24V AC or DC on request)
Diffuser : Clear Polycarbonate
Cable : Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;
Blue Amber Green Red

SYMMETRICAL INOX






Power	Lens	Code No
12x20mA BACKLIGHTING LEDS	120°	404501

ASYMMETRICAL INOX






Power	Lens	Code No
12x20mA LIGHTING LEDS	30°	404511
4x20mA LIGHTING LEDS	30°	404521

EMFA

LIGHTSTONE

DRIVE OVER LED FIXTURES
Load 7.5 kN | Class III IP67 IK10

Body
Polycarbonate






Voltage : 12V A.C standard with 10m cable

9 x 20 mA LEDS	Code No
Warm White	426101

Single color LED options upon request are ;
Blue Amber Green Red

Connection Box
Glass reinforced polyester
IP 67 recessable 18 cable glands to serve 18 lightstones complete with one 220 V AC - 12V AC transformer. Maximum distance to box is 50 m.

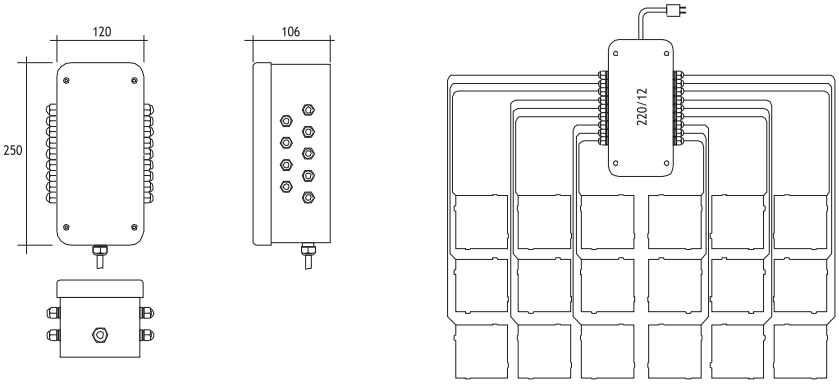


	Code No
Connection Box	426201


EMFA

TAROS

SURFACE MOUNTED LED FIXTURE
Class II IP67

Body
Acrylic
Cover
Stainless steel
Gear
Complete with Led Driver

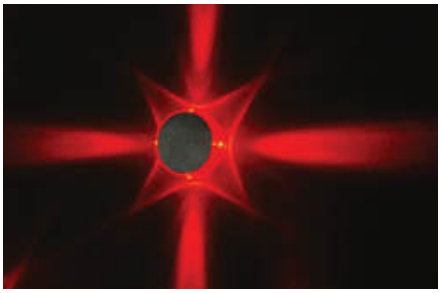





Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER **4 x 20 mA LIGHTING LEDS**	Code No
Warm White	428101

Single color LED options upon request are ;
Blue Amber Green Red

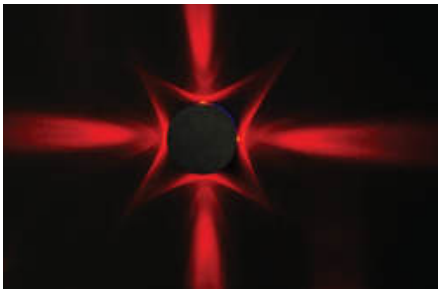



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER **4 x 20 mA LIGHTING LEDS**	Code No
Warm White	428111

Single color LED options upon request are ;
Blue Amber Green Red

EMFA