




VUVUZELA

PENDANT IP20

Available in any
of these RAL colors



Body

Black, gold or silver plated
304 stainless steel

Diffusers

Tempered Glass

Gaskets

Silicone

Mounting

Aluminium

Screws

316L stainless steel

POWER LED

Lamps : 4 x 700 mA (10W) LED

Lens : 40°

Transformer mounting : Remote


Transformer type : Electronic

Gear : 240v non-dimmable driver (1-10v dimmable driver & request)

Cable : 0.5m 2x0.75mm h03 w-f




RECESSED MOUNTED

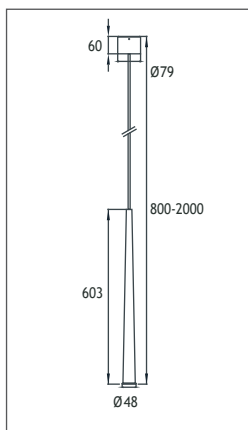

Power	Kelvin	Lens	Lumen Output	Code No
10W LED	2700 K	40°	950 lm	117002
10W LED	3000 K	40°	950 lm	117001

SURFACE MOUNTED

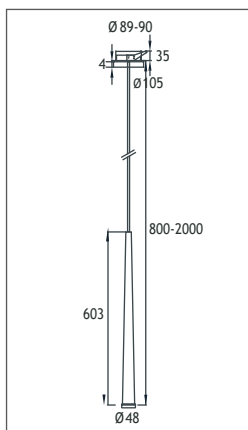

Power	Kelvin	Lens	Lumen Output	Code No
10W LED	2700 K	40°	950 lm	117012
10W LED	3000 K	40°	950 lm	117011



KATENER


HIGH BAY LED FIXTURES IP65

Body
Die cast aluminium
Cover
Steel
Gaskets
Silicone
Screws
316L stainless steel


Voltage : 240 V A.C with integrated driver
(24V AC or DC on request)

Lens : Optical Lens 60° / 90° / 120°


Cable : Potted 5 m 3x0,75 H03 VV-F



Power	Kelvin	Lens	Lumen Output	Code No
100W	2700 K	60°, 90°, 120°	9500 lm	436003
100W	4500 K	60°, 90°, 120°	9688 lm	436001
100W	6000 K	60°, 90°, 120°	9880 lm	436002



Power	Kelvin	Lens	Lumen Output	Code No
150W	2700 K	60°, 90°, 120°	14250 lm	436013
150W	4500 K	60°, 90°, 120°	14532 lm	436011
150W	6000 K	60°, 90°, 120°	14820 lm	436012



Power	Kelvin	Lens	Lumen Output	Code No
200W	2700 K	60°, 90°, 120°	19000 lm	436023
200W	4500 K	60°, 90°, 120°	19376 lm	436021
200W	6000 K	60°, 90°, 120°	19760 lm	436022



ELEA PENDANT FIXTURES

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------



Body
Acrylic
Side Caps
Aluminium
Reflector
Aluminium
Wires
Adjustable Suspending Steel Wire
Diffusers
Acrylic
Gear
Electronic
Mounting Brackets
Aluminium

HALOGEN

Voltage : 240 VAC Class II
Diffuser : Acrylic
Lamp : Fluo. G5
Gear : Integrated in tube



ELEA

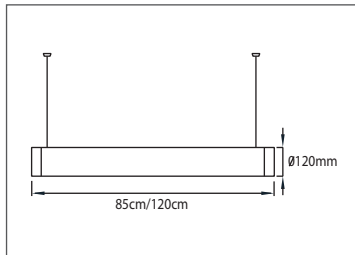

Power	Lampholder	Code No
FLUO 24W	G5	433101
3FLUO 5W	G5	433111

KARIA 2

PENDANT FIXTURES


Class I IP44 IK07

Available in any of these RAL colors


7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

HALOGEN

Voltage : 240V AC with integrated ballast
Diffuser : 4 mm Clear Glass
Lampholder : G5
Ballast : Electronic

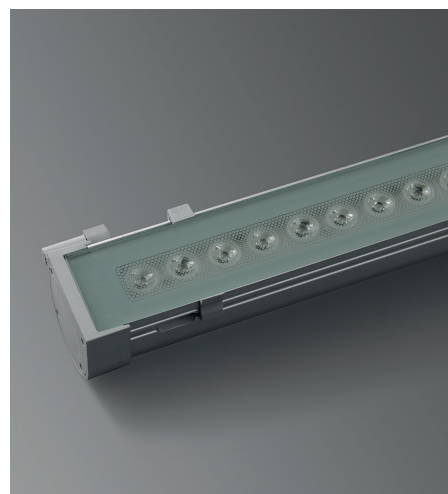


KARIA 2

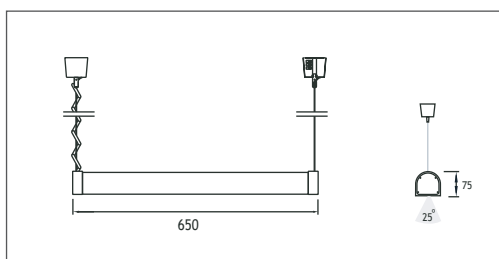

Power	Lampholder	Code No
T5 14W/24W	G5	431401

KARIA 3

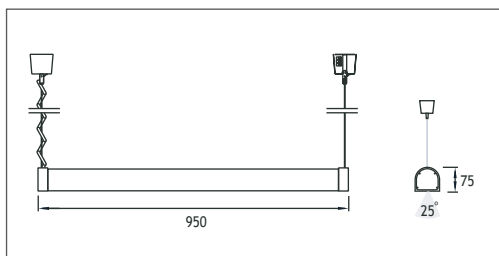

Power	Lampholder	Code No
T5 21W/39W	G5	431501

TROY

PENDANT FIXTURES

Class I IP55

(with glass & gasket)

HALOGEN

Head

Glass reinforced polyamide 6

Gear box inside

Reflector


Opaque ABS or translucent acrylic



TROY




With Ring




Please use 150... as the first three digits of the code number

With Suspending Rod And Bracket




Please use 151... as the first three digits of the code number

With Adjustable Suspending Steel & Wire Spring Cable



Please use 153... as the first three digits of the code number

With Adjustable Suspending Steel Wire & Cable For Mounting On Pipe



Please use 154... as the first three digits of the code number

1 x ELEC. FL. DEL 23 23W

Lampholder : E27 Code No

Translucent xxx101

Opaque xxx501

2 x ELEC. FL. DEL 23 23W

Lampholder : E27 Code No

Translucent xxx111

Opaque xxx511

1 x COMPACT FLUOR. 26W

Lampholder : G24 d-3 Code No

Translucent xxx141

Opaque xxx541

2 x COMPACT FLUOR. 26W

Lampholder : G24 d-3 Code No

Translucent xxx151

Opaque xxx551

1 x COMPACT FLUOR. 42W

Lampholder : G24 q-4 Code No

Translucent xxx181

Opaque xxx581