


# SLIM PYRAMID

## SURFACE MOUNTED FIXTURES Class II IP44 IK08

Available in any  
of these RAL colors



### Cover & Body

Glass reinforced polyester

### Screws

Inox

### Gasket

Silicone



### Glass

Tempered

### Recessing Box


Galvanized steel

(for recessed types only)

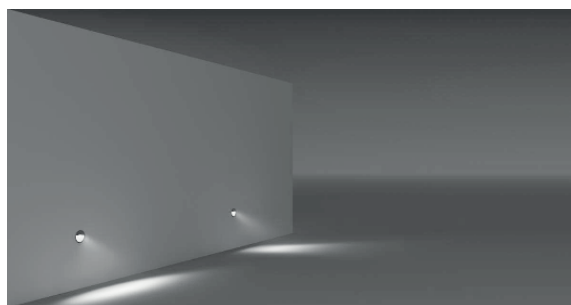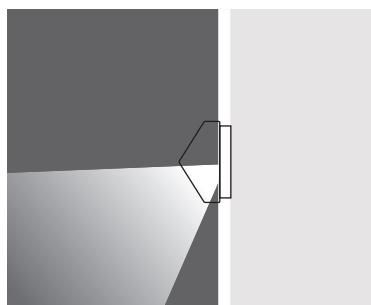

Lampholder : G24 d-1

Diffuser : Frosted Glass

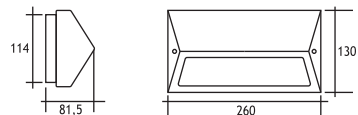

1 x 350 mA (10 W) LED		Total Lighting Output	Code No
☰ Natural White	4000 K	107 lm	503602