
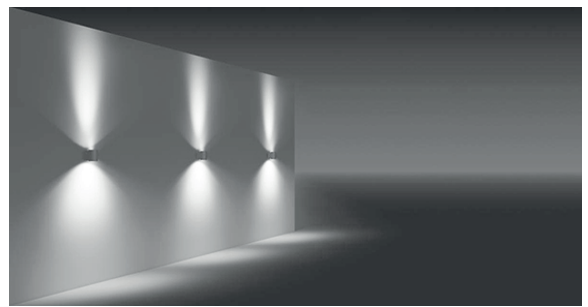


PEDESA

ROUND ACRYLIC APPLIQUES

Class I IP55

Body
Acrylic
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Acrylic
Gaskets
Silicone
Connection
IP connection box

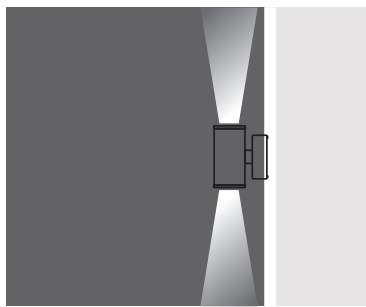

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)
Diffuser : Acrylic
Cable : Potted 5 m 3x0,75 H03 VV-F

PEDESA 2 ROUND APPLIQUE

320 mA (11W) LED

Code No

☾ Natural White 4000 K 504032

