




# BELKIS 1 LLS RECESSED LED FIXTURES

## Class I IP65 IK08




Available in any of these RAL colors



### Symmetrical With Milky Glass

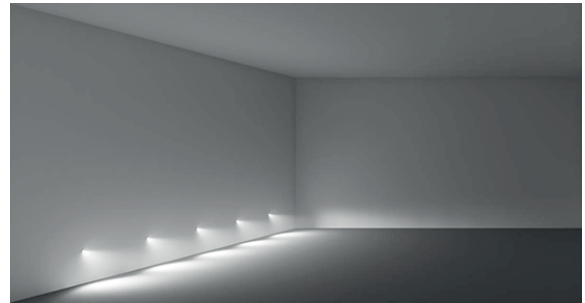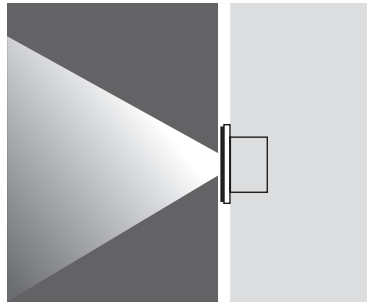



- Voltage** : 240V AC with integrated driver  
(12V DC or 24V DC on request)
- Diffuser** : Clear Glass 4 mm
- Cable** : Potted 5 m 3x0,75 H03 VV-F






Plastic Recessing Box for Concrete

1 x 350 mA (4 W) LED		Total Lighting Output	Code No
☀ Warm White	3000 K	128 lm	424111
☁ Natural White	4000 K	148 lm	424112

### Symmetrical With Anti-Glare Glass or Clear Glass

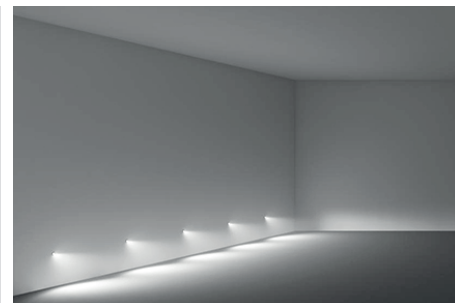

- Voltage** : 240V AC with integrated driver  
(12V DC or 24V DC on request)
- Diffuser** : Clear Glass 4 mm
- Cable** : Potted 5 m 3x0,75 H03 VV-F



Plastic Recessing Box for Concrete

#### Symmetrical With Anti-Glare Glass

1 x 350 mA (4 W) LED		Total Lighting Output	Code No
☀ Warm White	3000 K	255 lm	424121
☁ Natural White	4000 K	295 lm	424122

#### Symmetrical With Clear Glass

1 x 350 mA (4 W) LED		Total Lighting Output	Code No
☀ Warm White	3000 K	255 lm	424131
☁ Natural White	4000 K	295 lm	424132