


BELKIS 3 RECESSED LED FIXTURES


Load 5 kN | Class I IP67 IK10

Symmetrical BELKIS 3 Fix to Recessing Tube with Silicone

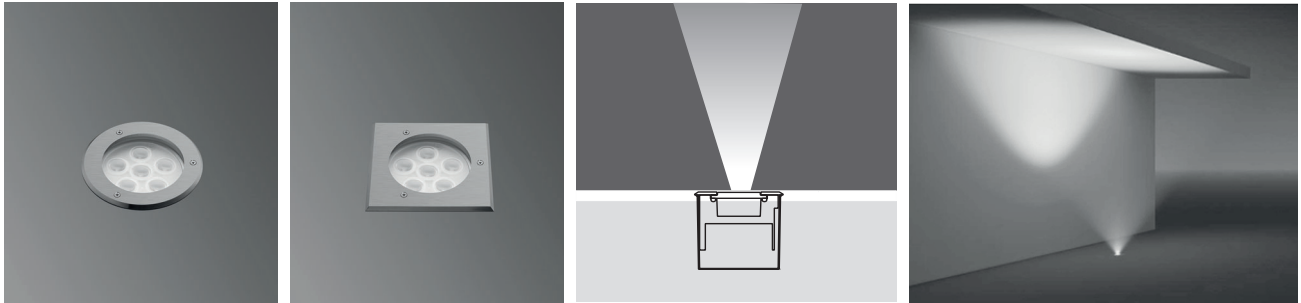


6 x 350 mA (6 W) LED	Total Lighting Output	Code No	
		Round	Square
☀ Warm White 3000 K	510 lm	422201	422211
☀ Natural White 4500 K	510 lm	422202	422216
☀ Cool White 6000 K	612 lm	422203	422217
🌈 RGB		422261	422271

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

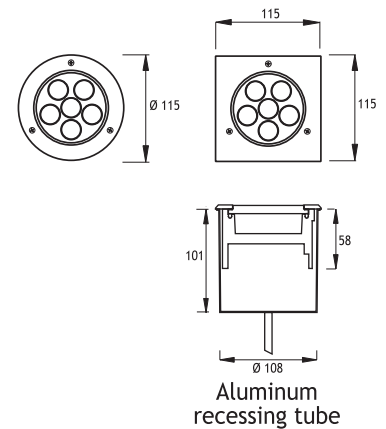


- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

Symmetrical BELKIS 3 Fix to Recessing Tube with Screws

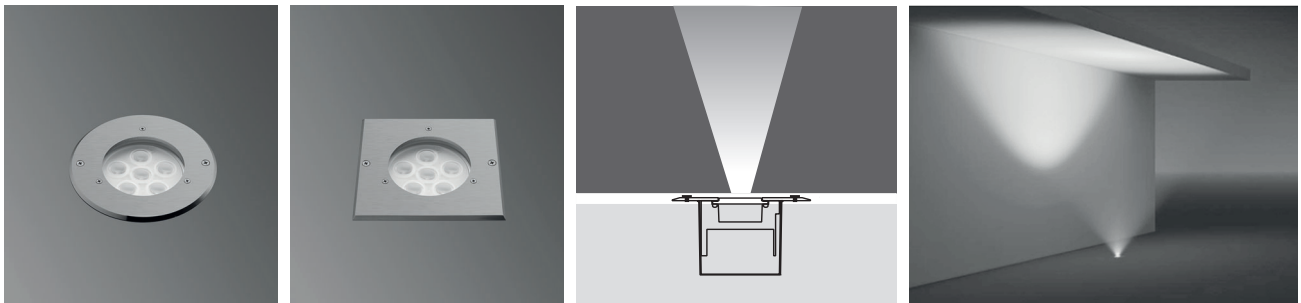

6 x 350 mA (6 W) LED	Total Lighting Output	Code No	
		Round	Square
☀ Warm White 3000 K	510 lm	422221	422231
☀ Natural White 4500 K	510 lm	422226	422236
☀ Cool White 6000 K	612 lm	422227	422237
🌈 RGB		422241	422251

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

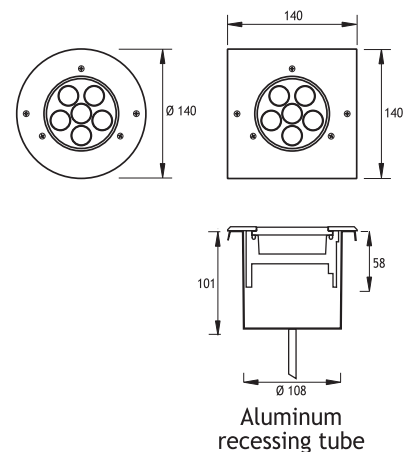


- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

BELKIS 3 RECESSED LED WITH TIR LENS FIXTURES

Class I IP67 IK10


Symmetrical BELKIS 3 Fix to Recessing Tube with Silicone

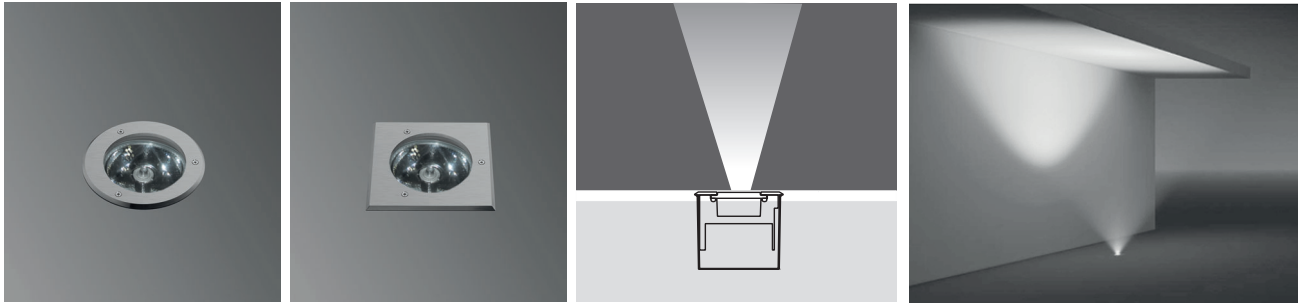


1 x 350 mA (11 W) COB LED		Total Lighting Output 11W	11W Round	11W Square
☀ Warm White	3000 K	784 lm	119601	119611
☀ Natural White	4000 K	941 lm	119602	119612

Single color LED options upon request are ;
 ● Blue ● Amber ● Green ● Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 20°, 30° Mirror TIR Lens
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

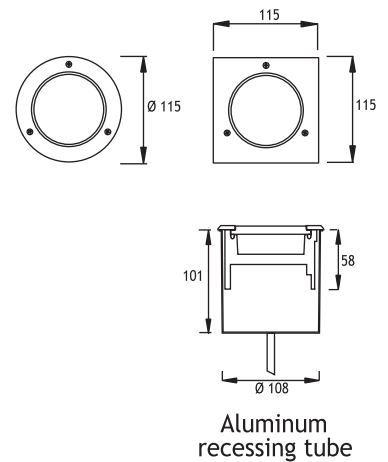

Symmetrical BELKIS 3 Fix to Recessing Tube with Screws

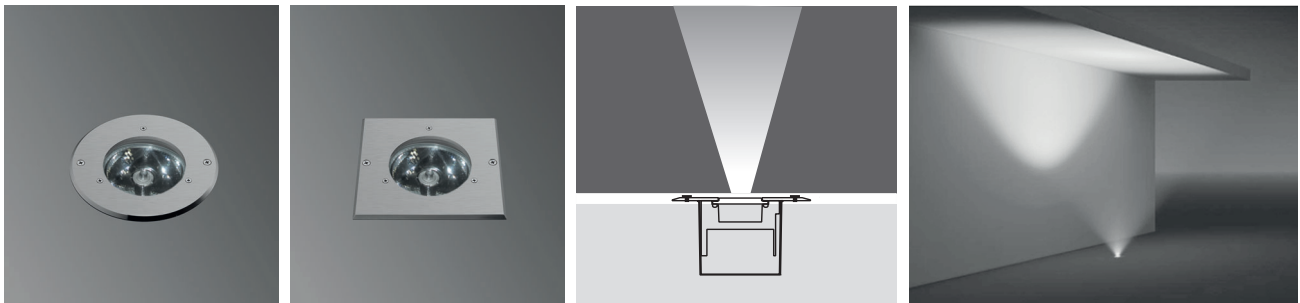

1 x 350 mA (11 W) COB LED		Total Lighting Output 11W	11W Round	11W Square
☀ Warm White	3000 K	784 lm	119701	119711
☀ Natural White	4000 K	941 lm	119702	119712

Single color LED options upon request are ;
 ● Blue ● Amber ● Green ● Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 20°, 30° Mirror TIR Lens
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

