


LYKIA LL SURFACE MOUNTED LED FIXTURES

Class I IP65 IK08

Available in any of these RAL colors



The LYKIA LL is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 2 different tones of white, 3000K and 4000K.

Body

Die cast aluminium

Paint


Electrostatic powder

Diffusers

Pmma

Gaskets

Silicone

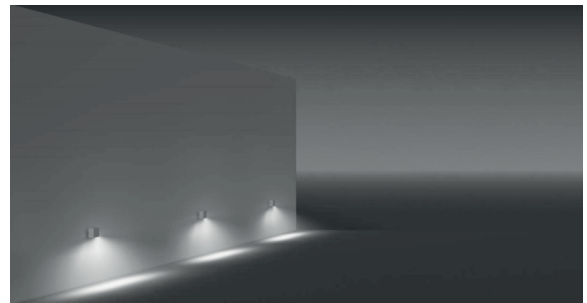

- Voltage** : 240V AC with integrated driver
(12V DC or 24V DC on request)
- Diffuser** : Clear Glass 12 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

	1 x 350 mA (3 W) LED	Total Lighting Output	Code No
☀️ Warm White	3000 K	92 lm	424201

