


# SQUARE



## LED APPLIQUE

### Class I IP65


Available in any of these RAL colors



- Body**  
Die cast aluminium
- Paint**  
Electrostatic powder
- Bracket**  
Die cast aluminium
- Diffuser**  
Tempered Glass or acrylic
- Gaskets**  
Silicone
- Connection**  
IP connection box

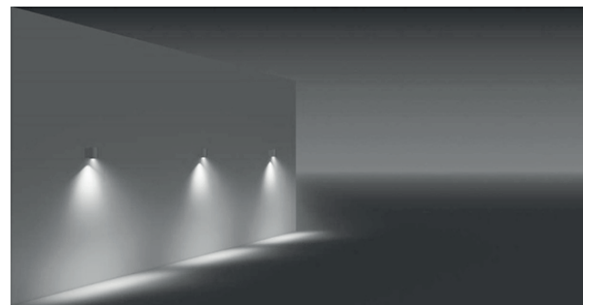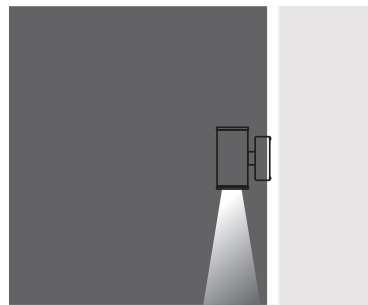

- Voltage** : 240V A.C with integrated driver  
(24V AC or DC on request)
- Lens** : 20°, 32°, 52°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

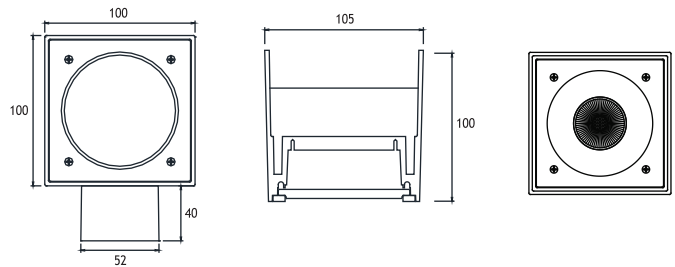

Multichip LED	Total Lighting Output	Code No
350 mA (9W)	756 lm	434032

☰ Natural White

4000 K

756 lm

434032