


# BELKIS 2 SURFACE MOUNTED CEILING FIXTURES

## Class I IP65

Available in any of these RAL colors



### Body

Die cast aluminium

### Paint

Electrostatic powder

### Bracket

Die cast aluminium

### Diffusers



Tempered glass

### Gaskets


Silicone

### Connection

IP connection box

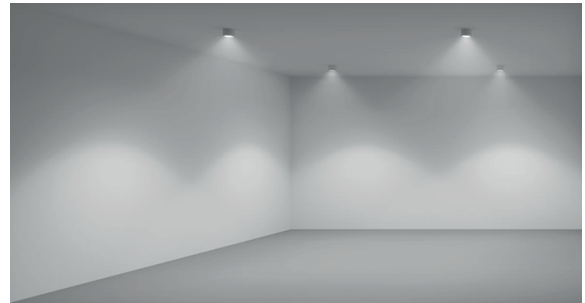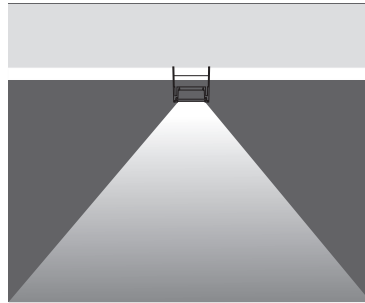

- Voltage** : 240V A.C with integrated Driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass with painted circumference 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

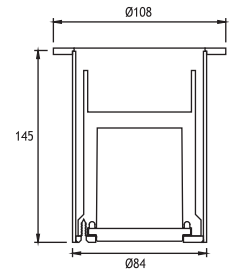

		Total Lighting Output		Code No	
		3W	9W	3W	9W
☀ Warm White	3000 K	255 lm	675 lm	435001	435011
☁ Natural White	4500 K	255 lm	675 lm	435002	435012
☁ Cool White	6000 K	306 lm	810 lm	435003	435013

Single color LED options upon request are ;

🟦 Blue 🟡 Amber 🟢 Green 🔴 Red