
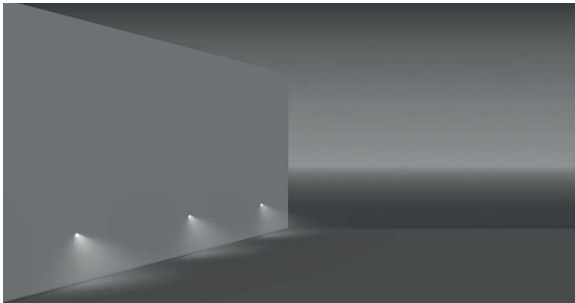


DYO

INOX WALL RECESSED LED FIXTURES

Class II IP67

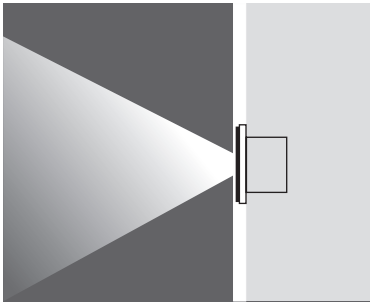


Symmetrical

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Standard with 5m 3x0,75 H03 VV-F cable





12 x 20 mA 120° BACKLIGHTING LEDS Code No

☀ Warm White 404501

Single color LED options upon request are ;

🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

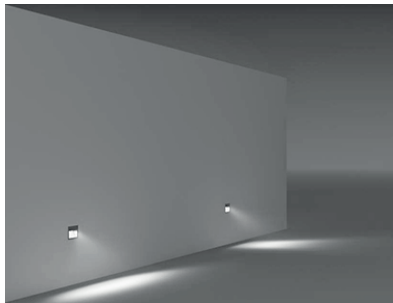

Asymmetrical



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Polycarbonate

Recessing Box : Inox (Stainless Steel)

30° LIGHTING LEDS Code No Code No
12 x 20 mA **4 x 20 mA**

☀ Warm White 404511 404521






Single color LED options upon request are ;

🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

DYO

WALL RECESSED LED FIXTURES

Class III IP20

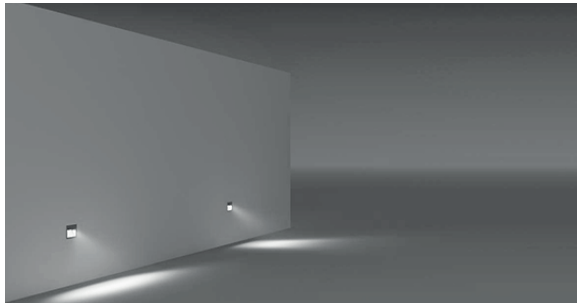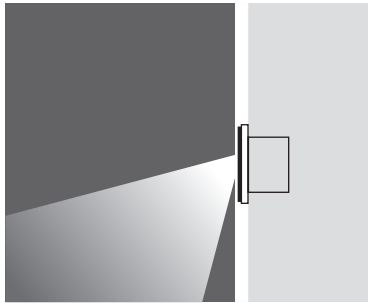

Outer Frame & Body

Anodized aluminium

Recessing Box

Galvanized Steel


Diffuser

Glass

Asymmetrical

Voltage : 240V A.C with integrated driver
(12V AC or DC, 24V AC or DC on request)

With connector



DYO 69 14L	
3 x 20 mA LIGHTING LEDS	Code No
☀ Warm White	405101

Single color LED options upon request are ;

🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

Asymmetrical

Voltage : 240V A.C with integrated driver
(12V AC or DC, 24V AC or DC on request)

With connector

DYO 69 14L	
4 x 20 mA LIGHTING LEDS	Code No
☀ Warm White	405151

Single color LED options upon request are ;

🟦 Blue 🟡 Amber 🟢 Green 🔴 Red