


GOREME 1

LED BOLLARDS

Class I IP65 IK10

Available in any of these RAL colors



Bottom Base

Polyamide (black color)

Outer Grill

Die cast aluminium

Pipe

Extrusion aluminium

Paint


Electrostatic powder

Diffuser

Polycarbonate or

Glass (incandescent and mercury lamps)

Anchor

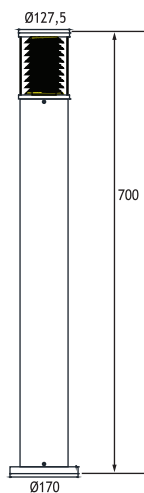

Voltage : 240V AC with integrated driver

(24V AC or DC on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

| GOREME 1 (70 CM) | | Total Lighting Output | Code No |
|------------------------------|--------|-----------------------|---------|
| 4 x 700 mA (24 W) LINEAR LED | | | |
| ☾ Natural White | 4000 K | 2080 lm | 127112 |