


SLIM PYRAMID

SURFACE MOUNTED FIXTURES Class II IP44 IK08

Available in any
of these RAL colors



Cover & Body

Glass reinforced polyester

Screws

Inox

Gasket

Silicone



Glass

Tempered

Recessing Box


Galvanized steel

(for recessed types only)

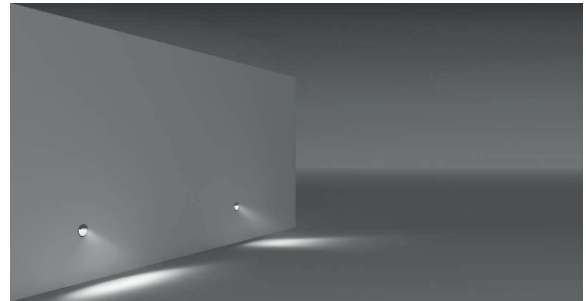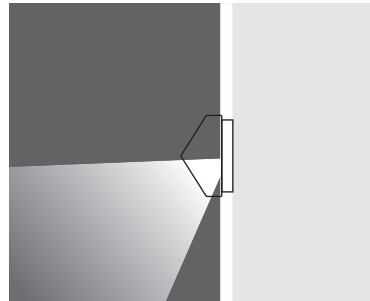

Lampholder : G24 d-1

Diffuser : Frosted Glass

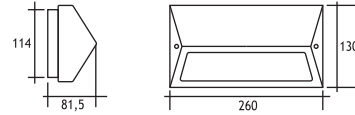

1 x 350 mA (10 W) LED

Total
Lighting
Output

Code No

☀ Warm White 3300 K

92 lm 503601