

BELKIS

RECESSED WALK OVER LED FIXTURES

Class II IP67

EMFA's 20mA LED fixtures are ideal for ambiance lighting outdoors and in where only touch of light is required. These fixtures apart from being used as orientation lights, can light steps and paths and highlight walls and columns acrylic are offered to fit the correct location. A choice of lighting or backlighting LEDs is offered to either a directional lighting effect or a lighting glow.

"Customization" is EMFA's standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Glass 6 mm

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.

Single color LED options upon request are ;

Blue Amber Green Red

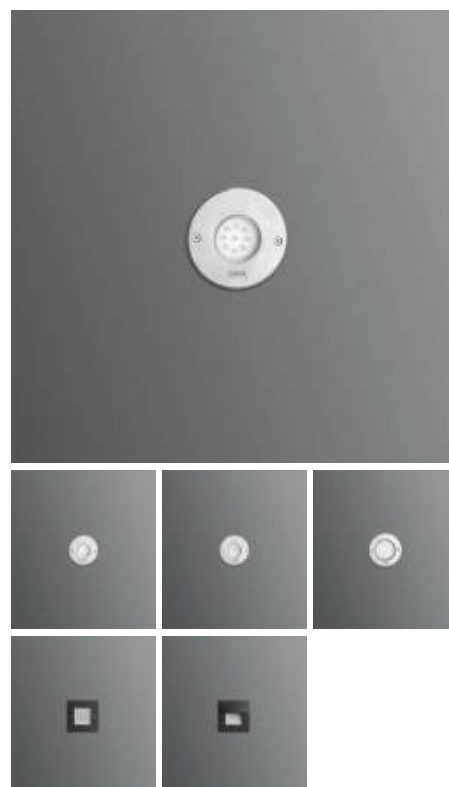

BELKIS 1




Power

9x20mA

Code No
Inox

418101

BELKIS 1




Power

1x20mA

Code No
Inox

418111

BELKIS 2



Power

18x20mA

Code No
Inox


418121

BELKIS

WALL RECESSED LED FIXTURES

Class II IP67

Available in any
of these RAL colors



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Cable : Potted 5 m 3x0,75 H03 VV-F


Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

Single color LED options upon request are ;


Blue Amber Green Red

BELKIS 0




Power	Code No	
	Alum	Inox
6x20mA LIGHTING LEDS	416201	416211
6x20mA LIGHTING LEDS	417101	417111

BELKIS 0




Power	Code No	
	Alum	Inox
9x20mA LIGHTING LEDS	416261	416271
9x20mA BACKLIGHTING LEDS	417191	417201

BELKIS 1



Power	Code No	
	Alum	Inox
1x20mA BACKLIGHTING LEDS	407501	417351

BELKIS 2




Power	Code No	
	Alum	Inox
12x20mA LIGHTING LEDS	416281	
4x20mA LIGHTING LEDS	416291	
4x20mA BACKLIGHTING LEDS	416561	
4x20mA BACKLIGHTING LEDS	416571	

BELKIS

SURFACE MOUNTED LED FIXTURES

Class II IP67

Available in any
of these RAL colors



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)



Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;


Blue Amber Green Red

BELKIS 0



Power	Code No	
	Alum	Inox
6x20mA LIGHTING LEDS	416221	416231
6x20mA BACKLIGHTING LEDS	417141	417151

BELKIS 0



Power	Code No	
	Alum	Inox
9x20mA LIGHTING LEDS	417751	417761
9x20mA BACKLIGHTING LEDS	417271	417281

DYO

WALL RECESSED LED FIXTURES

Class II IP67



Outer Frame & Body

Anodized aluminium

Recessing Box

Galvanized Steel

Voltage : 240V A.C (12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Polycarbonate

Cable : Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;


Blue Amber Green Red

SYMMETRICAL INOX



Power	Lens	Code No
12x20mA BACKLIGHTING LEDS	120°	404501

ASYMMETRICAL INOX




Power	Lens	Code No
12x20mA LIGHTING LEDS	30°	404511
4x20mA LIGHTING LEDS	30°	404521

LIGHTSTONE

DRIVE OVER LED FIXTURES
Load 7.5 kN | Class III IP67 IK10

Body
Polycarbonate



Voltage : 12V A.C standard with 10m cable

9 x 20 mA LEDS

Code No

☀ Warm White

426101

Single color LED options upon request are ;


🟦 Blue 🟡 Amber 🟢 Green 🔴 Red



Connection Box

Glass reinforced polyester

IP 67 recessable 18 cable glands to serve 18 lightstones complete with one 220 V AC - 12V AC transformer. Maximum distance to box is 50 m.

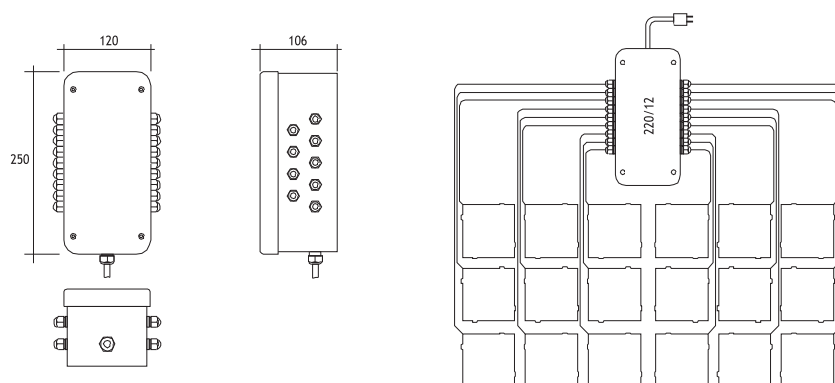

Code No


Connection Box

426201

TAROS

SURFACE MOUNTED LED FIXTURE
Class II IP67



Body
Acrylic
Cover
Stainless steel
Gear
Complete with Led Driver



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER 4 x 20 mA LIGHTING LEDS		Code No
 Warm White		428101

Single color LED options upon request are ;
 Blue  Amber  Green  Red

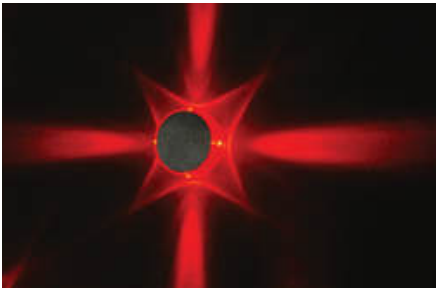

Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)
Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER 4 x 20 mA LIGHTING LEDS		Code No
 Warm White		428111

Single color LED options upon request are ;
 Blue  Amber  Green  Red

