EMFA

Where design, manufacturing, electronics and material expertise meet to create light.



EMFA


Light extends the day.

A garden, a building, a road — at nightfall each one disappears. The right light brings it back, and the hours a place can be used no longer end with the daylight.

EMFA A.Ş. was founded in 1958 and has been run by the same family for three generations. Its founder, Andon Kasapoğlu, ran the Istanbul trading house that first brought Bakelite to Turkey — thermoset pressing is still one of EMFA's own production steps today.

Almost every part of an EMFA fixture is made by EMFA. Casting, tooling, machining, surface treatment and assembly all happen in-house, which is why EMFA can change a detail for a single project and still deliver in weeks.



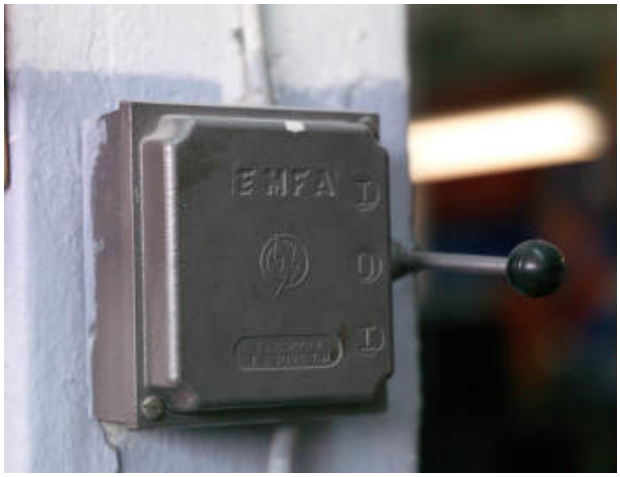


Certification

Built and tested to the EN 60598 series; CB certificates and the CE mark. Management systems to ISO 9001, 14001, 45001 and 10002.

Where the names come from

Milet, Knidos, Assos, Gordion, Perge, Sardes, Kibyra. These are the names of EMFA's product families, and every one belongs to an ancient city of Anatolia. By giving each family the name of a city, EMFA keeps that place present in the work being done today.

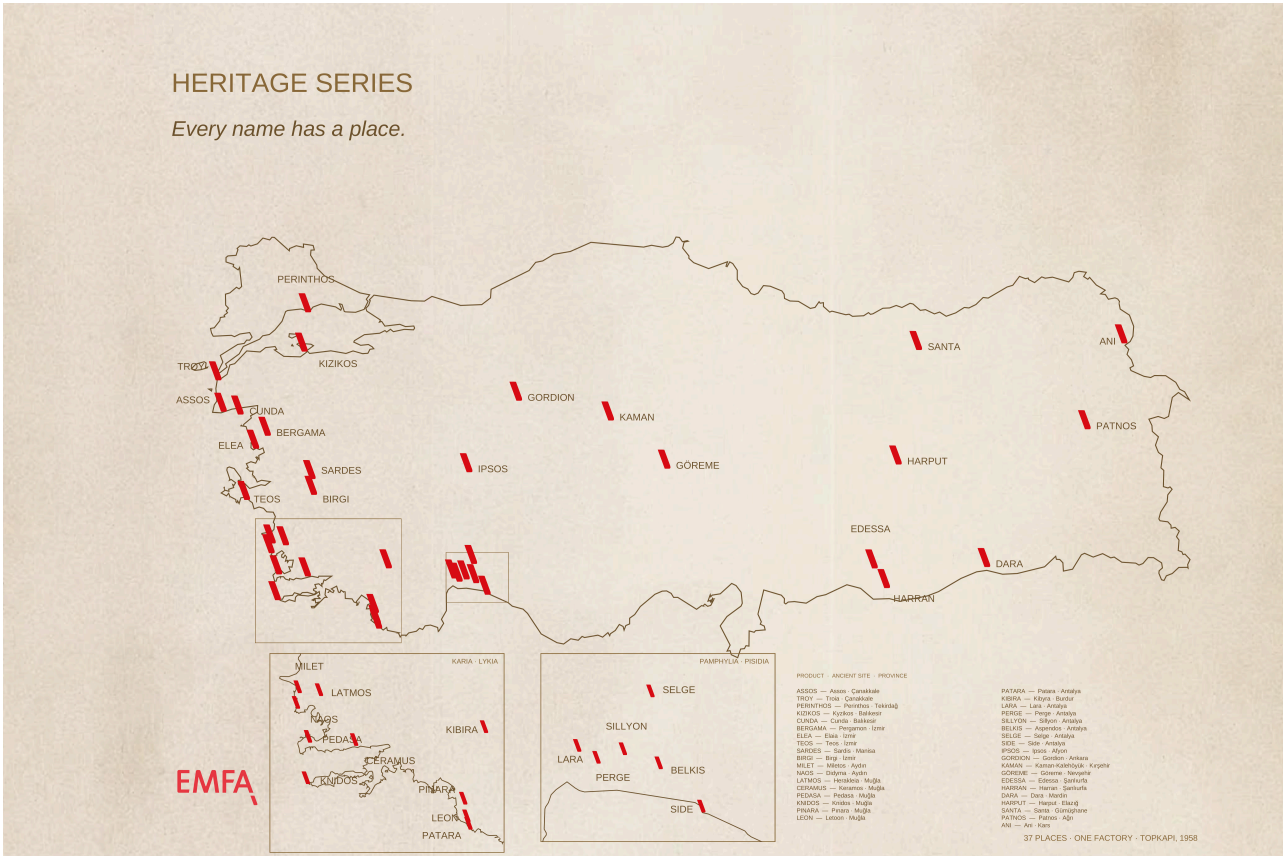


“The light of the ancient civilisations shines on the world through EMFA.”

ENGINEERING

Form follows function — and physics

An LED is not a lamp. A fixture designed for a halogen source and then fitted with an LED will run hot, and heat is what shortens an LED's life. In a sealed IP67 or IP68 fixture there is only one way out for that heat: through the metal the LED touches.

So EMFA starts from the thermal path. LEDs are mounted on metal-core PCBs, bonded to the die-cast aluminium body, and the whole fixture works as a heat sink. Every fixture is designed to hold its values at 50 °C ambient — verified in EMFA's own laboratory, not taken from a datasheet.

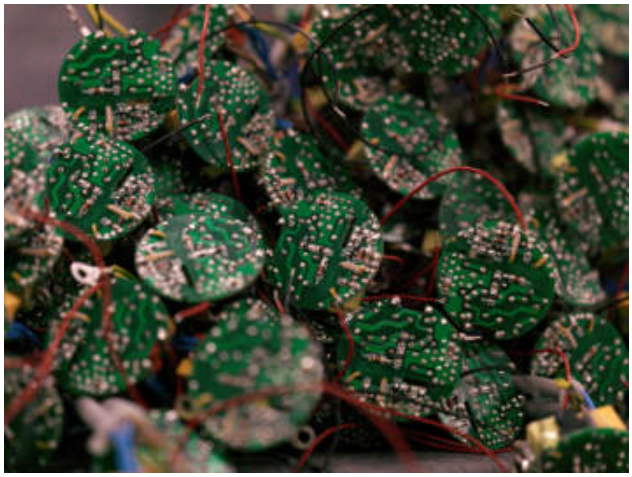



Light quality

- Colour consistency within 3-step MacAdam
- CRI ≥ 80 standard, ≥ 90 on request
- 2700 K, 3000 K, 4000 K, 6000 K, plus amber, blue, green, red and RGB
- Photometric files (IES / LDT) measured in-house for every fixture

CUSTOMISATION

Made to suit the project

Every fixture in this catalogue can be altered to suit the project. At EMFA this is not an exception but the ordinary way of working.

Each fixture can be produced in one of 6 standard paint colours or in any RAL tone. To this are added 3 stainless steel finishes, 8 LED colours, 2 wattages and 5 or more lenses and reflectors. Where a project goes beyond the catalogue, trims, bodies, cable lengths and optics are modified as well.

Because tooling, casting and machining are done in EMFA's own factories, these changes are practical at project scale, not only for large production runs.





SUSTAINABILITY

EMFA runs on its own sunlight.

EMFA owns a solar power plant in Kırşehir that generates an average of 1,000 MWh a year — roughly twice the combined electricity consumption of its two factories. Through net metering, all of the factories' electricity comes from that plant, and the surplus is fed back into the grid.



Long life by design

EMFA fixtures are built from die-cast aluminium and 316L stainless steel, sealed to IP67 and IP68, with LEDs kept cool by design. Many installed decades ago are still in service, and EMFA supplies parts long after production ends.

Certified management

ISO 14001 and ISO 45001 run alongside ISO 9001 and ISO 10002.




MANUFACTURING

Two factories, one workflow

EMFA manufactures in Istanbul and in Tekirdağ, with a combined 15,000 m² of production area and around 75 people. Short lead times and one-off modifications are possible because design, tooling, casting, machining, finishing, electronics and the photometric laboratory all sit in EMFA's own plants.





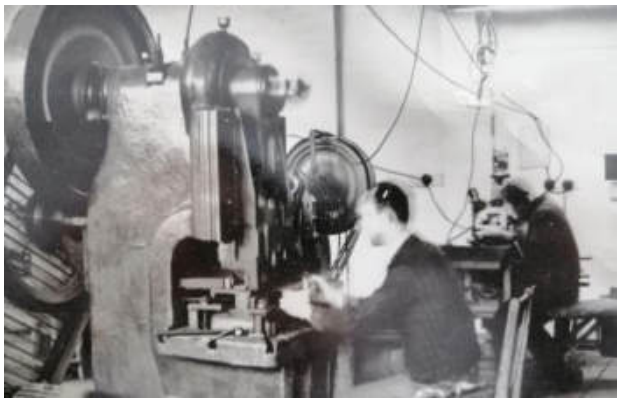

Milestones

1940 Andon Kasapoğlu establishes Bakalit, the Istanbul trading house that first brings Bakelite to Turkey, and begins producing electrical components.

1958 Andon Kasapoğlu founds EMFA.

1975 Rokos Kasapoğlu, the second generation, joins EMFA.

1976 The first lighting fixture.

1979 Investment in aluminium die-casting.

1984 Lighting becomes EMFA's main business.

1990 Electrostatic painting plant: any RAL colour, in-house.

1996 The first LED fixture.

2005 CNC machining opens the way to small-batch production.

2012 Adnan Kasapoğlu, the third generation, joins EMFA.

2013 In-house photometric laboratory.

2020 A 10,000 m² facility opens in Malkara, Tekirdağ; laser cutting follows in 2021.

2025 The solar plant in Kırşehir comes online.

REFERENCES

Where EMFA is installed

EMFA exports to more than 40 countries. A selection of projects:

Zorlu Center Istanbul
Palmarina Bodrum
Mall of Istanbul Istanbul
Spine Tower Istanbul
Port Alaçatı Marina İzmir
JW Marriott Marquis Hotel Dubai
JW Marriott Absheron Hotel Baku
Jeju Global Education City Jeju
University of the West of England Bristol
Rixos Tersane Istanbul
Four Seasons Hotel Bosphorus Istanbul
Radisson Blu Hotel Çeşme
Galataport Istanbul
Cullinan Hotel Antalya
Lara Barut Antalya
Yerebatan Sarnıcı Istanbul
Watergarden Istanbul
Papillon Zeugma Hotel Antalya
Uniq Istanbul
Hyde Hotel Bodrum
Akra Hotel Antalya
Ela Quality Hotel Antalya
Maxx Royal Bodrum
ADNOC Abu Dhabi
Büyükyalı Istanbul
Mandarin Oriental Bosphorus Istanbul
Aviva Stadium Dublin
Argos in Cappadocia Nevşehir
The Ritz-Carlton Istanbul
Mövenpick Hotel Istanbul Asia Istanbul



EMFA

EMFA Elektrik Malzeme Fabrikası A.Ş.
Istanbul Davutpaşa Cd. Cebealibey Sk. No. 18, 34010 Topkapı / İstanbul — TÜRKİYE
Tekirdağ Çavuşköy Mah. Arda Cad. No. 18, 59300 Malkara / Tekirdağ — TÜRKİYE
T +90 212 482 29 62 · E emfa@emfa.com.tr · emfa.com.tr

Catalogue 2027 · Photometric files, installation drawings and datasheets: emfa.com.tr. Specifications are subject to change without notice. Lumen values measured in EMFA's photometric laboratory, 2026.

documents



GCR CERT

CERTIFICATE

EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ

DAVUTPAŞA CADDESİ CEBE ALİBEY SOKAK NO:18
TOPKAPI / ZEYTİNBURNU / İSTANBUL / İSTANBUL

In recognition of the organization's Management System which complies with

ISO 45001:2018

The scope of activities covered by this certificate is defined below

PRODUCTION AND SALES OF OUTDOOR AND INDOOR LIGHTING PRODUCTS

DIŞ VE İÇ MEKAN AYDINLATMA ÜRÜNLERİ ÜRETİMİ VE SATIŞI

Certificate Number : GCR/CERT-03.2025.004201
Certificate Issue Date : 15.03.2025
Certificate Validity : 14.03.2026

Abimanyu Gaurav
Approval



CERTIFICATE

EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ

DAVUTPAŞA CADDESİ CEBE ALİBEY SOKAK NO:18
TOPKAPI / ZEYTİNBURNU/ İSTANBUL / TÜRKİYE

Has been assessed and found to comply with the requirements of:
Denetlenmiş ve aşağıdaki standardın gerekliliklerine uygunluğu görülmüştür:

ISO 14001:2015

The Environmental Management System is applicable to:
Çevre Yönetim Sistemi:

PRODUCTION AND SALES OF OUTDOOR AND INDOOR LIGHTING PRODUCTS

DIŞ VE İÇ MEKAN AYDINLATMA ÜRÜNLERİ ÜRETİMİ VE SATIŞI

Certificate Number: EMS-006728 | **Initial Certification Date: 15.03.2025**
Belge Numarası: EMS-006728 | **İlk Belgelendirme Tarihi: 15.03.2025**

Certification Period: 3 Years | **Certificate Validity Date: 14.03.2026**
Belgelendirme Periyodu: 3 Yıl | **Belge Geçerlilik Tarihi: 14.03.2026**

IQR

IAS ACCREDITED Management Systems Certification Body MSCB-135

IQR ULUSLARARASI BELGELENDİRME HİZMETLERİ LTD.ŞTİ.



GCR CERT

CERTIFICATE

EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ

DAVUTPAŞA CADDESİ CEBE ALİBEY SOKAK NO:18
TOPKAPI / ZEYTİNBURNU / İSTANBUL / İSTANBUL

In recognition of the organization's Management System which complies with

ISO 10002:2018

The scope of activities covered by this certificate is defined below

PRODUCTION AND SALES OF OUTDOOR AND INDOOR LIGHTING PRODUCTS

DIŞ VE İÇ MEKAN AYDINLATMA ÜRÜNLERİ ÜRETİMİ VE SATIŞI

Certificate Number : GCR/CERT-03.2025.004200
Certificate Issue Date : 15.03.2025
Certificate Validity : 14.03.2026

Abimanyu Gaurav
Approval



CERTIFICATE

EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ

DAVUTPAŞA CADDESİ CEBE ALİBEY SOKAK NO:18
TOPKAPI / ZEYTİNBURNU/ İSTANBUL / TÜRKİYE

Has been assessed and found to comply with the requirements of:
Denetlenmiş ve aşağıdaki standardın gerekliliklerine uygunluğu görülmüştür:

ISO 9001:2015

The Quality Management System is applicable to:
Kalite Yönetim Sistemi:

PRODUCTION AND SALES OF OUTDOOR AND INDOOR LIGHTING PRODUCTS

DIŞ VE İÇ MEKAN AYDINLATMA ÜRÜNLERİ ÜRETİMİ VE SATIŞI

Certificate Number: QMS-006728 | **Initial Certification Date: 15.03.2025**
Belge Numarası: QMS-006728 | **İlk Belgelendirme Tarihi: 15.03.2025**

Certification Period: 3 Years | **Certificate Validity Date: 14.03.2026**
Belgelendirme Periyodu: 3 Yıl | **Belge Geçerlilik Tarihi: 14.03.2026**

IQR

IAS ACCREDITED Management Systems Certification Body MSCB-135

IQR ULUSLARARASI BELGELENDİRME HİZMETLERİ LTD.ŞTİ.

documents

TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Markanın Tanımı / Description of the Mark: TSE veya/or TSE veya/or TSE

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	000058-TSE-02/04
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	24.04.2013
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	30.03.2026
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	MALTEPE MAH. CEBE ALİ BEY SK. /18 NO:1 ZEYTİNBURNU İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	DAVUTPAŞA CAD. CEBEALİBEY SOK. NO:18 34020 TOPKAPI İSTANBUL / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) *INDICATION OF SUPERSEDED LICENCE (if any)*	000058-TSE-02/03
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	EMFA
İLGİLİ TÜRK STANDARDI *RELATED TURKISH STANDARD*	TS EN IEC 60598-2-1 / 30.09.2021 -- TS EN IEC 60598-1 / 12.04.2021 -- TS EN IEC 60598-1/A11 / 28.04.2022
BELGE KAPSAMI *SCOPE OF LICENCE*	-Belkıs Model, 220-230 V, 50-60 Hz., I Sınıfı, IP 67, 36 W LEDli Genel Amaçlı Sabit Aydınlatma Armatürü (K.G.: 21.02.2022)

e-imzalı/e-signed
08.07.2025
Belgelendirme Merkezi Başkanı Adına
AKDOĞAN BULUT
İSTANBUL BELGELENDİRME MÜDÜRÜ V.

*Bu belge, belgelendirilen ürünün, üretim yerinin Enstitümüzün belirlediği şartları karşıladığını da gösterir.
*Bu belge, hiç bir suretle tahrif edilemez, kısmen veya okunmasını zorlaştıracak şekilde çoğaltılamaz, kazıntı ve silinti yapılamaz.
*TSE İSTANBUL BELGELENDİRME MÜDÜRLÜĞÜ * Adres: Çayırova Tren İstasyonu Yanı ÇAYIROVA/GEBZE * Telefon: 2627231273* Faks: 2627231606
*TSE BELGELENDİRME MERKEZ BAŞKANLIĞI; Adres: Necatibey Cad. No:112 06100 Bakanlıklar/ANKARA – Telefon: 0 312 416 64 81 / 416 64 27, Faks:0 312 416 66 17 E-posta :bmb@tse.org.tr , web : www.tse.org.tr

https://evrakkontrol.tse.org.tr/BelgeDogrulama.aspx?p=ces46kbb adresinden belgenin doğruluğunu ve geçerliliğini sorgulayınız.

TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Markanın Tanımı / Description of the Mark: TSE veya/or TSE veya/or TSE

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	000058-TSE-01/05
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	08.04.2001
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	30.03.2026
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	MALTEPE MAH. CEBE ALİ BEY SK. /18 NO:1 ZEYTİNBURNU İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	DAVUTPAŞA CAD. CEBEALİBEY SOK. NO:18 34020 TOPKAPI İSTANBUL / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) *INDICATION OF SUPERSEDED LICENCE (if any)*	000058-TSE-01/04
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	EMFA
İLGİLİ TÜRK STANDARDI *RELATED TURKISH STANDARD*	TS EN IEC 60598-2-18 / 30.09.2022 -- TS EN IEC 60598-1/A11 / 28.04.2022
BELGE KAPSAMI *SCOPE OF LICENCE*	-Atlantis Model, 12-24 V d.c., III Sınıfı, IP 68, 30 W LEDli Havuz Aydınlatma Armatürü (K.G.:20.12.2021)

e-imzalı/e-signed
08.07.2025
Belgelendirme Merkezi Başkanı Adına
AKDOĞAN BULUT
İSTANBUL BELGELENDİRME MÜDÜRÜ V.

*Bu belge, belgelendirilen ürünün, üretim yerinin Enstitümüzün belirlediği şartları karşıladığını da gösterir.
*Bu belge, hiç bir suretle tahrif edilemez, kısmen veya okunmasını zorlaştıracak şekilde çoğaltılamaz, kazıntı ve silinti yapılamaz.
*TSE İSTANBUL BELGELENDİRME MÜDÜRLÜĞÜ * Adres: Çayırova Tren İstasyonu Yanı ÇAYIROVA/GEBZE * Telefon: 2627231273* Faks: 2627231606
*TSE BELGELENDİRME MERKEZ BAŞKANLIĞI; Adres: Necatibey Cad. No:112 06100 Bakanlıklar/ANKARA – Telefon: 0 312 416 64 81 / 416 64 27, Faks:0 312 416 66 17 E-posta :bmb@tse.org.tr , web : www.tse.org.tr

https://evrakkontrol.tse.org.tr/BelgeDogrulama.aspx?p=qkgasiau adresinden belgenin doğruluğunu ve geçerliliğini sorgulayınız.

TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Markanın Tanımı / Description of the Mark: TSE veya/or TSE veya/or TSE

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	000058-TSE-04/03
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	25.06.2006
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	02.03.2026
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	MALTEPE MAH. CEBE ALİ BEY SK. /18 NO:1 ZEYTİNBURNU İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	DAVUTPAŞA CAD. CEBEALİBEY SOK. NO:18 34020 TOPKAPI İSTANBUL / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) *INDICATION OF SUPERSEDED LICENCE (if any)*	000058-TSE-04/02
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	EMFA
İLGİLİ TÜRK STANDARDI *RELATED TURKISH STANDARD*	TS EN 60598-2-5 / 18.02.2016 -- TS EN IEC 60598-1 / 12.04.2021 -- TS EN IEC 60598-1/A11 / 28.04.2022
BELGE KAPSAMI *SCOPE OF LICENCE*	STAR MODEL 230 V, 50 Hz MAX 500W, I SINIFI, IP 54 HALOJEN LAMBALARLA KULLANILAN PROJEKTÖR (K.D.: 08.07.2024) ALFA MODEL 230 V, 50 Hz MAX 500W, I SINIFI, IP 55 HALOJEN LAMBALARLA KULLANILAN PROJEKTÖR (K.D.: 08.07.2024) BETA 1 MODEL 230 V, 50 Hz MAX 1000W, I SINIFI, IP 55 HALOJEN LAMBALARLA KULLANILAN PROJEKTÖR (K.D.: 08.07.2024)

TÜRKAK Ürün TS EN ISO/IEC 17065 AB-5106-U

e-imzalı/e-signed
08.07.2025
Belgelendirme Merkezi Başkanı Adına
AKDOĞAN BULUT
İSTANBUL BELGELENDİRME MÜDÜRÜ V.

*Bu belge, belgelendirilen ürünün, üretim yerinin Enstitümüzün belirlediği şartları karşıladığını da gösterir.
*Bu belge, hiç bir suretle tahrif edilemez, kısmen veya okunmasını zorlaştıracak şekilde çoğaltılamaz, kazıntı ve silinti yapılamaz.
*TSE İSTANBUL BELGELENDİRME MÜDÜRLÜĞÜ * Adres: Çayırova Tren İstasyonu Yanı ÇAYIROVA/GEBZE * Telefon: 2627231273* Faks: 2627231606
*TSE BELGELENDİRME MERKEZ BAŞKANLIĞI; Adres: Necatibey Cad. No:112 06100 Bakanlıklar/ANKARA – Telefon: 0 312 416 64 81 / 416 64 27, Faks:0 312 416 66 17 E-posta :bmb@tse.org.tr , web : www.tse.org.tr

https://evrakkontrol.tse.org.tr/BelgeDogrulama.aspx?p=27tjrrxs adresinden belgenin doğruluğunu ve geçerliliğini sorgulayınız.

TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Markanın Tanımı / Description of the Mark: TSE veya/or TSE veya/or TSE

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	000058-TSE-03/05
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	22.11.2002
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	08.01.2026
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	MALTEPE MAH. CEBE ALİ BEY SK. /18 NO:1 ZEYTİNBURNU İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	EMFA ELEKTRİK MALZEME FABRİKASI ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	DAVUTPAŞA CAD. CEBEALİBEY SOK. NO:18 34020 TOPKAPI İSTANBUL / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) *INDICATION OF SUPERSEDED LICENCE (if any)*	000058-TSE-03/04
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	EMFA
İLGİLİ TÜRK STANDARDI *RELATED TURKISH STANDARD*	TS EN 60598-2-2 / 05.06.2012 -- TS EN IEC 60598-1 / 12.04.2021 -- TS EN IEC 60598-1/A11 / 28.04.2022
BELGE KAPSAMI *SCOPE OF LICENCE*	-Downlight Model, 220-230 V, 50-60 Hz., I Sınıfı, IP 65, 30 W LEDli Gömme Aydınlatma Armatürü (K.G.: 01.02.2022)

e-imzalı/e-signed
13.10.2025
Belgelendirme Merkezi Başkanı Adına
Musa TOKKAN
İSTANBUL BELGELENDİRME MÜDÜRÜ V.


*Bu belge, belgelendirilen ürünün, üretim yerinin Enstitümüzün belirlediği şartları karşıladığını da gösterir.
*Bu belge, hiç bir suretle tahrif edilemez, kısmen veya okunmasını zorlaştıracak şekilde çoğaltılamaz, kazıntı ve silinti yapılamaz.
*TSE İSTANBUL BELGELENDİRME MÜDÜRLÜĞÜ * Adres: Çayırova Tren İstasyonu Yanı ÇAYIROVA/GEBZE * Telefon: 2627231273* Faks: 2627231606
*TSE BELGELENDİRME MERKEZ BAŞKANLIĞI; Adres: Necatibey Cad. No:112 06100 Bakanlıklar/ANKARA – Telefon: 0 312 416 64 81 / 416 64 27, Faks:0 312 416 66 17 E-posta :bmb@tse.org.tr , web : www.tse.org.tr

https://evrakkontrol.tse.org.tr/BelgeDogrulama.aspx?p=efx8wbuk adresinden belgenin doğruluğunu ve geçerliliğini sorgulayınız.

Product Index

PRODUCT INDEX

Drive Over


Milet Ani 1-2-3-4
p 23


Milet Ani 1-2-3-4 Asym
p 23


Knidos
p 24-25


Knidos Cool Glass
p 24-25


Santos 4-5
p 27-30


Teos 3
p 31-32


Mira
p 34-35


Mira 2
p 34-35


Assos 2
p 36


Assos 3
p 37-38


Assos 4
p 40


Assos 6
p 40

Walk Over


Mira 5
p 43-44


Milet Ani 1-2-3-4
p 47


Milet Ani 1-2-3-4 Asym
p 47


Assos 6
p 48


Milet
p 49-50


Birgi 1
p 53-54


Birgi 2
p 55


Birgi 3
p 56


Kaman
p 58-59


Belkis Mini
p 61


Belkis 1
p 64-65


Belkis 1 Asym
p 64-65


Belkis 2
p 67-75


Belkis 2 Wallwasher
p 67-75


Belkis 2 Asym
p 67-75


Belkis 3
p 76-80


Belkis 3 Deep
p 76-80


Belkis 3 Asym
p 76-80


Belkis 4
p 82-83


Belkis 4 Deep
p 82-83


Belkis 5
p 84-87


Belkis 5 Asym
p 84-87


Belkis 5 Wallwasher
p 84-87


Patnos 1
p 90-91

EMFA

PRODUCT INDEX


Patnos 1 Asym
p 90-91


Patnos 2
p 92-95


Patnos 2 Wallwasher
p 92-95


Patnos 2 Asym
p 92-95


Patnos 3
p 97-98


Patnos 3 Deep
p 97-98


Patnos 3 Asym
p 97-98


Patnos 4
p 100-101


Patnos 4 Deep
p 100-101


Patnos 5
p 103-104


Patnos 5 Asym
p 103-104


Patnos 5 Wallwasher
p 103-104


Gordion 1
p 106


Gordion 2
p 106


Gordion 2 Asym
p 106


Gordion 3
p 107


Gordion 3 Asym
p 107


Gordion 4
p 107


Gordion 5
p 108


Gordion 5 Asym
p 108

Wall Recessed


Milet Ani 1-2-3-4
Inox
p 112


Milet Ani 1-2-3-4 Asym
Inox
p 112


Milet Ani 1-2-3-4
Alum
p 114


Milet Ani 1-2-3-4 Asym
Alum
p 114


Santos 6
p 115


Mira
p 116


Belkis 3
p 118


Belkis 4
p 118


Milet 1
p 119


Milet 2
p 119


Milet 3
p 119


Milet 4
p 119

PRODUCT INDEX


Belkis Mini
p 120


Belkis 1 LLA
p 121


Belkis 1 LLS
p 121


Saturn
p 123


Bergama
p 125


Pyramid
p 126


Slim Pyramid
p 127


Side
p 128


Perge
p 129


Belkis Mini Asym
p 62

Surface Mounted


Knidos
p 131


Neptun 3
p 132


Belkis 5
p 133


Teos
p 134-135


Mira 1
p 137-138


Mira 2
p 137-138


Karia 1
p 139-140


Karia 2-3
p 139-140


Santa
p 141-142


Slim Pyramid
p 143


Side
p 144


Perge
p 145


Milet
Wall
p 146


Milet
Indirect
p 147


Square Mini
p 148


Belkis 1 LLA
p 149


Belkis 1 LLS
p 149


Saturn LL
p 151


Lykia LL
p 153


Milet Ani 1-2-3-4
Fixed
p 157


Milet Ani 1-2-3-4 Asym
Fixed
p 157


Milet Ani 1-2-3-4
Adjustable
p 158


Milet Ani 1-2-3-4 Asym
Adjustable
p 158


Taros 2
p 159

PRODUCT INDEX


Selge
p 161


Silyon
p 163


Leon
p 164


Ceramus Mini
p 167


Ceramus 2
p 169


Belkis Appliques
p 171-172


Belkis Acrylic Appliques
p 174


Square
p 176-177


Pedasa 1-2 Round
p 178


Pedasa Square
p 178


Saturn Appliques
p 179

Spots


Dara 2
p 183


Dara 3
p 183


Dara 4
p 183


Square Mini
p 184


Square
p 185


Belkis Mini
p 188


Belkis 1
p 190


Belkis 2
p 192-194


Belkis 3
p 196


Belkis 4
p 198


Belkis 5
p 200-203


Belkis 6
p 205


Respot 3
p 206


Harran
p 207-208


Edessa
p 209-210

Bollards


Trion
p 213-214


Harran Mini
p 215


Leon
p 216


Leon Wood
p 218


Leon 2
p 219


Leon 2 Stone
p 221

PRODUCT INDEX


Leon 3
p 222


Kibira
p 224


Sardes
p 227


Kibira Mushroom
p 230


Perinthos
p 231


Kizikos
p 232


Kizikos Mini
p 235


Ani 1
p 237


Ani 1 Asym
p 237


Ani 1 Wood
p 238


Ani 4
p 239


Ani 4 Asym
p 239


Bella
p 240


L Type
p 241


Beton
p 242


Beton L Type
p 244


Beton Square
p 245


Odeon
p 246-247


Dion 1
p 250


Dion 2
p 250


Dion 3
p 250


Dion 4
p 250


Dion 5
p 250


Milet
p 252


Polaris 1-2
p 254


Lara
p 255


Belkis 1
p 257


Goreme 1
p 259


Goreme 2
p 259


Bow
p 260


Rambo
p 261


Mushroom
p 263

PRODUCT INDEX

Stainless Steel Underwater


Atlantis 1-2
Recessed
p 268


Atlantis 5
Recessed
p 268


Atlantis 18
p 269


Atlantis 27
p 270


Atlantis 1-2
Recessed Mounted
p 272


Atlantis 5
Recessed Mounted
p 272


Atlantis 1-2
Spot
p 273


Atlantis 5
Spot
p 273


Inox Recessed
p 274


Inox Spot
p 274


Mira Atlantis 1
Recessed
p 276


Mira Atlantis 2
Recessed
p 276


Mira Atlantis 1
Surface Mounted
p 277


Mira Atlantis 2
Surface Mounted
p 277

Stainless Steel Outdoor


Atlantis 1-2
Recessed
p 281


Atlantis 5
Recessed
p 281


Atlantis 1-2
Surface Mounted
p 282


Atlantis 5
Surface Mounted
p 282


Atlantis 1
Surface Mounted
p 283


Atlantis 1
Spot
p 284


Atlantis 2
Spot
p 284


Atlantis 3
Spot
p 284


Atlantis 4
Spot
p 285


Atlantis 5
Spot
p 285


Atlantis 5
p 286


Atlantis Bollard
p 287



Inox Round Appliques
p 290, 292



Inox Square Appliques
p 291, 293



Inox
p 294

PRODUCT INDEX

Downlights


Pinara 1
p 297


Pinara 2
p 297


Pinara Trimless
p 298


Harput
p 300


Harput Mini
p 301


Harput 2-3-4
p 302-304


Pentathlon
p 305


Pentathlon Trimless
p 306


Saturn
p 309


Saturn Mini
p 311


Cunda
p 312



Dot
p 313



Patara
p 314


Belkis Mini
p 315


Marathon 2
p 316


Marathon 2 Glass Recessed
p 316


Marathon 3
p 318


Marathon 4
p 318


Decathlon 2
p 321


Decathlon 3 TIR Lens
p 323


Decathlon 4
p 323


Triathlon 3
p 325-326


Triathlon 4
p 325-326


Triathlon 5
p 325-326


Triathlon Halo 3
p 327


Triathlon Halo 4
p 327


Triathlon Halo 5
p 327


Belkis 1 Recessed
p 328


Belkis 2 Recessed
p 328


Belkis 5 Recessed
p 328


Dyo LED
p 330


Cunda / Patara
p 332


Milet Hole
p 333


Square
p 335


Marathon 2 Glass Surface
p 336


Decathlon 3 Surface
p 337

PRODUCT INDEX


Belkis 2
Surface COB
p 339


Belkis
Surface Power LED
p 341


Belkis
Surface Pipe
p 342


Belkis
Recessed Pipe
p 343


Bergama
p 344

Pendants


Vuvuzela
p 347


Katener
p 349


Elea
p 351


Karia 2
p 352


Troy
p 353

Pole Fixtures


Trion
p 356-357


Edessa
p 359-361


Leon
p 362


Ani 4 L Type
p 364-366


Ani 4 T Type
p 364-366


Belkis 5
p 367


Goreme
p 368-369


LPA
p 371


LPB
p 372


LPC
p 373


LPD
p 374


LPE
p 375

20 mA LED


Belkis 1
Walk Over
p 378


Belkis 2
Walk Over
p 378



Belkis 0
Wall
p 379



Belkis 1
Wall
p 379


Belkis 2
Wall
p 379


Belkis
p 380


Dyo
p 381


Lightstone
p 382


Taros
p 383

Drive Over





MILET ANI


RECESSED DRIVE OVER FIXTURES
Load 8 kN | Class I IP67 IK10

EMFA's Ani step mounted series is specially designed to deliver low-glare lighting to facades, columns, monuments, and trees with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LEDs. The Linear LEDs with special lenses give excellent wallwashing effect. An anti-slip glass is available upon request.




Cover
316L Stainless steel
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
8 mm Tempered Glass
Screws
316L Stainless Steel


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



Symmetrical

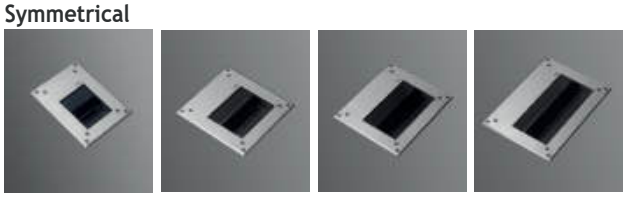





Galvanized Recessing Box


Asymmetrical






LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Asym. Glass




Trenched Glass



Milky Glass




Clear Glass



MILET ANI


RECESSED DRIVE OVER FIXTURES
Load 8 kN | Class I IP67 IK10






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8 mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	450003	450503
6W	3000 K	570 lm	450001	450501
6W	4000 K	581 lm	450002	450502
12W	2700 K	1140 lm	450013	450513
12W	3000 K	1140 lm	450011	450511
12W	4000 K	1195 lm	450012	450512

ANI 2









Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	450103	450603
6W	3000 K	570 lm	450101	450601
6W	4000 K	690 lm	450102	450602
12W	2700 K	1140 lm	450113	450613
12W	3000 K	1140 lm	450111	450611
12W	4000 K	1195 lm	450112	450612

ANI 3








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	450203	450703
12W	3000 K	1140 lm	450201	450701
12W	4000 K	1195 lm	450202	450702
24W	2700 K	2280 lm	450213	450713
24W	3000 K	2280 lm	450211	450711
24W	4000 K	2320 lm	450212	450712


ANI 4







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	450303	450803
24W	3000 K	2280 lm	450301	450801
24W	4000 K	2320 lm	450302	450802
36W	2700 K	3420 lm	450313	450813
36W	3000 K	3420 lm	450311	450811
36W	4000 K	3520 lm	450312	450812



Galvanized Recessing Box

EMFA

KNIDOS RECESSED DRIVE OVER FIXTURES
Load 20 kN | Class I IP67 IK10

EMFA's Knidos series consists of a range of LED, metal halide, and fluorescent sources to deliver the desired light effect to facades, columns, monuments and trees. The fixture is made of a combination of 316L stainless steel and glass reinforced polyester, which makes it completely resistant to corrosion. The sturdy fixture allows loads up to 20 kN and IK10. The LEDs used come in 3 different tones of white, as well as blue, red, green, and amber. An anti-slip glass is available upon request.

Adjustable Asymmetrical LEDs
In this series EMFA is introducing its first adjustable asymmetric LED unit. The LEDs can be internally adjusted up to 40 degrees to give the desired light output to facades, columns, monuments, and trees without losing light to the sky. The Knidos is large enough, and has enough surface area so that at an ambient temperature of 50° C, 9 LEDs can be operated at 350 mA (9W).

Cover
316L Stainless steel
Body
Glass reinforced polyester
Gaskets
Silicone
Diffusers
12 mm Tempered Glass
Screws
316L Stainless Steel


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are fixed to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.









Fixed Adjustable

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Accessories:



Anti-slip Glass

Please contact for this option.

KNIDOS

RECESSED DRIVE OVER FIXTURES
Load 8 kN | Class I IP67 IK10






Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

LED








Power	Kelvin	Real Lumen Output	Lens	Code No Flush Mounted	Code No Step Mounted
9W	2700 K	855 lm	10°,25°,40°	258003	258013
9W	3000 K	855 lm	10°,25°,40°	258001	258011
9W	4000 K	891 lm	10°,25°,40°	258002	258012
18W	2700 K	1710 lm	10°,25°,40°	258021	258031
18W	3000 K	1710 lm	10°,25°,40°	258022	258032
18W	4000 K	1782 lm	10°,25°,40°	258023	258033

METAL HALIDE SPOT








Power	Lampholder	Code No Flush Mounted	Code No Step Mounted
35W METAL HALIDE	Gx8.5	254301	254311
70W METAL HALIDE	Gx8.5	254401	254411

METAL HALIDE WALLWASHER








Power	Lampholder	Code No Flush Mounted	Code No Step Mounted
35W METAL HALIDE	Rx 7s	251101	251201
70W METAL HALIDE	Rx 7s-24	251111	251211


METAL HALIDE







Power	Lampholder	Code No Flush Mounted	Code No Step Mounted
35W METAL HALIDE	G12	257001	257101
70W METAL HALIDE	G12	257011	257111



Special Ventilation System
for Cooling



SANTOS 4


RECESSED DRIVE OVER FIXTURES
Load 10 kN | Class I IP67 IK10

EMFA's Santos flush mounted series is specially designed to deliver low-glare lighting to facades, columns, monuments and trees with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. A shield above the lamp reduces the glare of the metal halide lamps. A mirror finish reflector allows for a narrow to wide beam light output. An anti-slip glass is available upon request.




Cover
316L Stainless steel
Body
Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box
Gaskets
Silicone
Diffusers
8 mm Tempered Glass
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6






Fixed Adjustable


Mounting Feature



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.



Correct



Incorrect

When mounting the fixture on uneven surfaces, place so that the water does not accumulate on the surface of the fixture.





This fixture is also available with 2 screws instead of 4. For this option, please contact us.



Anti-slip Glass

Please contact for this option.



SANTOS 4


RECESSED DRIVE OVER FIXTURES
Load 10 kN | Class I IP67 IK10



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Diffuser : Clear Tempered Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

LED






Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	855 lm	10°,23°,36°	550211
9W	3000 K	855 lm	10°,23°,36°	550212
9W	4000 K	872 lm	10°,23°,36°	550213
18W	2700 K	1710 lm	10°,23°,36°	550203
18W	3000 K	1710 lm	10°,23°,36°	550201
18W	4000 K	1744 lm	10°,23°,36°	550202

LED LAMP






Power	Lampholder	Code No
PAR30 Led Lamp	E27 Adjustable	550101

METAL HALIDE






Power	Lampholder	Code No
20W METAL HALIDE	G 8.5 Fixed	550111
35W METAL HALIDE	G 8.5 Fixed	550121
70W METAL HALIDE	G 8.5 Fixed	550131

METAL HALIDE





Power	Lampholder	Code No
35W METAL HALIDE	Gx8.5 Adjustable	550151
70W METAL HALIDE	Gx8.5 Adjustable	550161

EMFA


SANTOS 5


RECESSED DRIVE OVER FIXTURES
Load 6 kN | Class I IP67 IK10

EMFA's Santos step mounted series is specially designed to deliver low-glare lighting to facades, columns, monuments and trees with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. A shield above the lamp reduces the glare of the metal halide lamps. A mirror finish reflector allows for a narrow to wide beam light output. An anti-slip glass is available upon request.




Cover
316L Stainless steel
Body
Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box
Gaskets
Silicone
Diffusers
8 mm Tempered Glass
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

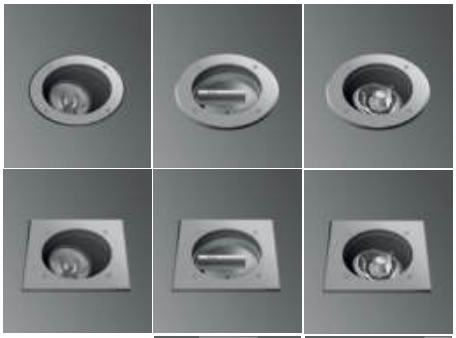




Fixed Adjustable


Mounting Feature



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.



Correct



Incorrect

When mounting the fixture on uneven surfaces, place so that the water does not accumulate on the surface of the fixture.






This fixture is also available with 2 screws instead of 4. For this option, please contact us.



Anti-slip Glass

Please contact for this option.





EMFA

SANTOS 5


RECESSED DRIVE OVER FIXTURES
Load 6 kN | Class I IP67 IK10




Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

LED






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W	2700 K	855 lm	10°,23°,36°	551321	551331
9W	3000 K	855 lm	10°,23°,36°	551322	551332
9W	4000 K	872 lm	10°,23°,36°	551323	551333
18W	2700 K	1710 lm	10°,23°,36°	551303	551313
18W	3000 K	1710 lm	10°,23°,36°	551301	551311
18W	4000 K	1744 lm	10°,23°,36°	551302	551312

LED LAMP






Power	Lampholder	Code No Round	Square
PAR30 Led Lamp	E27 Adjustable	551101	551201

METAL HALIDE






Power	Lampholder	Code No Round	Square
20W METAL HALIDE	G 8.5 Fixed	551111	551211
35W METAL HALIDE	G 8.5 Fixed	551121	551221
70W METAL HALIDE	G 8.5 Fixed	551131	551231

METAL HALIDE SPOT





Power	Lampholder	Code No Round	Square
35W METAL HALIDE	Gx8.5 Adjustable	551151	551251
70W METAL HALIDE	Gx8.5 Adjustable	551161	551261

TEOS 3

RECESSED DRIVE OVER FIXTURES
Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Teos 3 Recessed Drive Over LED Fixture is specially designed to deliver high output LED light to ground surfaces of roads, carparks and pathways. This heavy duty fixture is designed to withstand the weight of large vehicles. Its robust construction allows for a maximum static load of 5000kg. The body and head of the fixture are made of die cast aluminium, while the recessing tube is made of steel to withstand the repeated impact of driving vehicles' tires. The high power LEDs are positioned and angled to provide maximum light output. The electronic LED driver is housed in the base of the fixture. The fixture comes with 2 x PG13.5 cable glands and 0.5m cable.













Cover
Die cast aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
Polycarbonate
Screws
316L Stainless steel
Glands
2 x PG 13.5
Cable
0.5m 3x0,75 mm H05VV-F
Recessing Tube
Electrostatic powder paint
Coated steel



Mounting Feature



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.

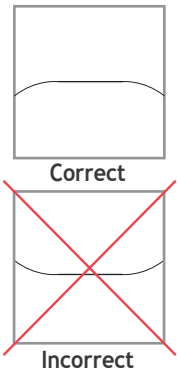

When mounting the fixture on uneven surfaces, place so that the water does not accumulate on the surface of the fixture.

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are fixed to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

TEOS 3


RECESSED DRIVE OVER FIXTURES
Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015








Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Mono






Power	Kelvin	Real Lumen Output	Code No
1 x 4W	2700 K	1 x 380 lm	180103
1 x 4W	3000 K	1 x 380 lm	180101
1 x 4W	4000 K	1 x 418 lm	180102

Duo 1-way






Power	Kelvin	Real Lumen Output	Code No
2 x 4W	2700 K	2 x 380 lm	180113
2 x 4W	3000 K	2 x 380 lm	180111
2 x 4W	4000 K	2 x 418 lm	180112

Duo 2-way






Power	Kelvin	Real Lumen Output	Code No
2 x 4W	2700 K	2 x 380 lm	180123
2 x 4W	3000 K	2 x 380 lm	180121
2 x 4W	4000 K	2 x 418 lm	180122

Trio







Power	Kelvin	Real Lumen Output	Code No
3 x 4W	2700 K	3 x 380 lm	180133
3 x 4W	3000 K	3 x 380 lm	180131
3 x 4W	4000 K	3 x 418 lm	180132

Quad





Power	Kelvin	Real Lumen Output	Code No
4 x 4W	2700 K	4 x 380 lm	180143
4 x 4W	3000 K	4 x 380 lm	180141
4 x 4W	4000 K	4 x 418 lm	180142

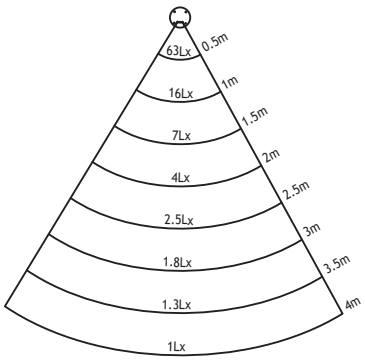

Lux levels for one aperture at 3000K


TERSANE
İSTANBUL


MIRA

RECESSED DRIVE OVER FIXTURES
Load 20 kN | Class I IP67 IK10

The Mira series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for drive over up to 20 kN including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.




Cover
316L Stainless steel
Body
Die cast aluminium
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless steel
Recessing Box
Stainless steel

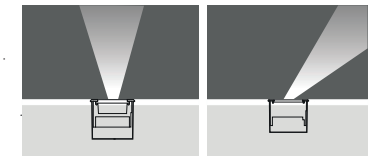

Symmetrical Asymmetrical

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

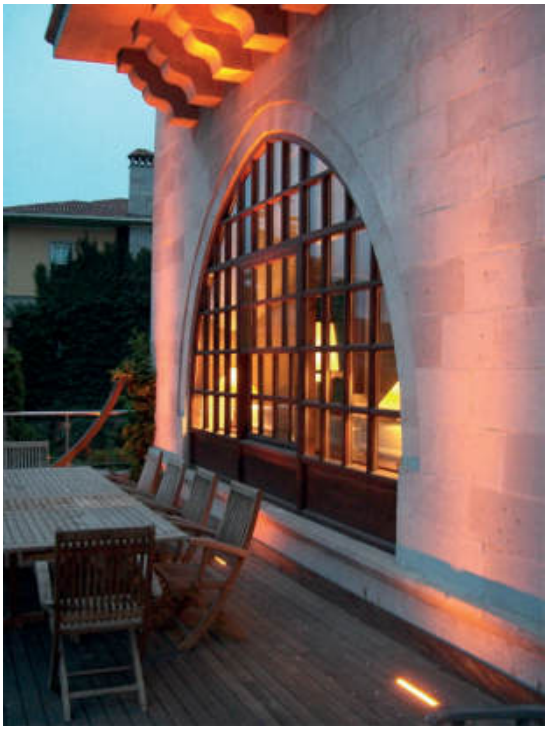

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are fixed to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

MIRA

RECESSED DRIVE OVER FIXTURES
Load 20 kN | Class I IP67 IK10





Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 12 mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

MIRA 1 LED






Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	10°,25°,40°	430118	430354
12W	3000 K	1140 lm	10°,25°,40°	430111	430351
12W	4000 K	1160 lm	10°,25°,40°	430116	430352
12W	6000 K	1185 lm	10°,25°,40°	430117	430353
27W	RGB		25°,40°	430161	430361


MIRA 2 LED






Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical	Code No Asymmetrical
36W	2700 K	3420 lm	10°,25°,40°	430614	430608
36W	3000 K	3420 lm	10°,25°,40°	430611	430601
36W	4000 K	3488 lm	10°,25°,40°	430612	430606
36W	6000 K	3557 lm	10°,25°,40°	430613	430607
27W	RGB		25°,40°	430621	430631

MIRA 2 LED

Power	Kelvin	Real Lumen Output	Code No Symmetrical
12W	2700 K	1140 lm	430723
12W	3000 K	1140 lm	430721
12W	4000 K	1160 lm	430722
12W	6000 K	1185 lm	430724

MIRA 2 METAL HALIDE

Power	Lampholder	Code No Asymmetrical
70W	G 8.5 METAL HALIDE	430711

ASSOS 2

RECESSED DRIVE OVER FIXTURES
Load 15 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


EMFA's Assos 2 series is specially designed to light facades, columns, monuments and trees with a die cast aluminium grill protecting the glass. The fixture can be equipped with metal halide or fluorescent lamps. The fixture is made completely of die cast aluminium body, which allows for IP67 and IK10 and a load of 15kN. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete. A louvre can be ordered separately to reduce the glare of the lamps.





Cover
Die cast aluminium
Body
Die cast aluminium or aluminium profile with
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
8 mm Tempered Glass
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

Mounting Feature




Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.



This fixture is suitable for helicopter landing pads due to its heavy duty aluminium cover.

LED LAMP






Power	Lampholder	Code No
LED Lamp	E27	201131

METAL HALIDE





Power	Lampholder	Code No
35W METAL HALIDE	G 12 Adjustable	201141
70W METAL HALIDE	G 12 Adjustable	201151
150W METAL HALIDE	G 12 Adjustable	201161

EMFA

ASSOS 3

RECESSED DRIVE OVER FIXTURES
Load 15 kN | Class I IP67 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


EMFA's Assos 3 series is specially designed to light pathways, roads, and gardens. The fixture can be equipped with LED or fluorescent lamps. The fixture has 4 different options of cover: Multi, Mono, Dual, and Wall to give different lighting effects. In combination with the die cast aluminium body, the fixture allows for IP67 and IK10 and a load of 15kN. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete.



Cover
Die cast aluminium
Body
Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
Tempered press glass or polycarbonate
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

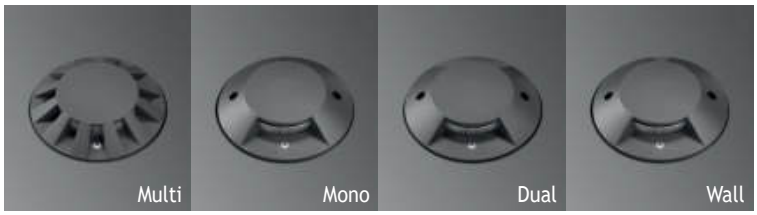

Mounting Feature



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are fixed to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.


ASSOS 3

RECESSED DRIVE OVER FIXTURES
Load 15 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Polycarbonate

CRI : >80 or >90


Cable : Potted 1m 3x1 H03 VV-F






Power	Kelvin	Real Lumen Output	Code No
1 x 4W LED	2700 K	1 x 380 lm	203142
1 x 4W LED	3000 K	1 x 380 lm	203141
1 x 4W LED	4000 K	1 x 387 lm	203143
1 x 4W LED	6000 K	1 x 395 lm	203144
Led Lamp		G9	203101






Power	Kelvin	Real Lumen Output	Code No
2 x 4W LED	2700 K	2 x 380 lm	204142
2 x 4W LED	3000 K	2 x 380 lm	204141
2 x 4W LED	4000 K	2 x 387 lm	204143
2 x 4W LED	6000 K	2 x 395 lm	204144
Led Lamp		G9	204101





Power	Kelvin	Real Lumen Output	Code No
1 x 11W LED	2700 K	1045 lm	202142
1 x 11W LED	3000 K	1045 lm	202141
1 x 11W LED	4000 K	1065 lm	202143
1 x 11W LED	6000 K	1087 lm	202144
Led Lamp		G9	202101





Power	Kelvin	Real Lumen Output	Code No
2 x 4W LED	2700 K	2 x 380 lm	205142
2 x 4W LED	3000 K	2 x 380 lm	205141
2 x 4W LED	4000 K	2 x 387 lm	205143
2 x 4W LED	6000 K	2 x 395 lm	205144
Led Lamp		G9	205101

EMFA

ASSOS

RECESSED DRIVE OVER FIXTURES
Load 15 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Assos 4 series is specially designed to light facades, columns, monuments and trees. The fixture can be equipped with metal halide or fluorescent lamps. The fixture has 3 different options of cover: 316L stainless steel, die cast aluminium or bronze in combination with the die cast aluminium body which allows for IP67 and IK10 and a load of 15kN. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete. A louvre can be ordered separately to reduce the glare of the lamps. An anti-slip glass is available upon request.










Fixed




Adjustable


Cover
Die cast aluminium / 316L Stainless Steel
Body
Die cast aluminium or aluminium profile with
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
15 mm Tempered Glass
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6



Mounting Feature



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.

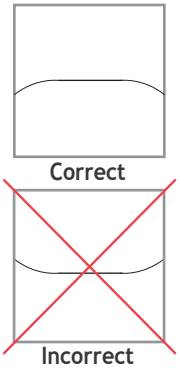

When mounting the fixture on uneven surfaces, place so that the water does not accumulate on the surface of the fixture.

Accessories:



Louvre
To avoid glare.
Can be applied to all lamp types except PAR 30 and 38 Code No 955105



Dichroic Color Glass Filter
Can be applied to all lamp types except PAR 38.

Code No 955101 - Blue
Code No 955102 - Red
Code No 955103 - Yellow
Code No 955104 - Green

Caution:
The louvre and filter cannot be applied to the standard fixture. These options should be mentioned when ordering.



Anti-slip Glass

Please contact for this option.

EMFA

ASSOS

RECESSED DRIVE OVER FIXTURES
Load 15 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





Voltage : 240 VAC with integrated driver (24V AC or DC on request)


Diffuser : 12 mm Clear Glass (Frosted Glass on request)

Cable : Potted 1m 3x1 H03 VV-F

ASSOS 4 LED LAMP








Power	Lampholder	Code No Alum	Code No Inox
PAR30 Led Lamp	E27 Adjustable	221311	221321

ASSOS 4 METAL HALIDE








Power	Lampholder	Code No Alum	Code No Inox
35W METAL HALIDE	Gx8.5 Adjustable	206271	207271
70W METAL HALIDE	Gx8.5 Adjustable	206231	207231
35W METAL HALIDE	G 12 Adjustable	206241	207241
70W METAL HALIDE	G 12 Adjustable	206251	207251
150W METAL HALIDE	G 12 Adjustable	206261	207261

ASSOS 6 LED LAMP








Power	Lampholder	Code No Inox
PAR30 Led Lamp	E27 Adjustable	221391

ASSOS 6 METAL HALIDE







Power	Lampholder	Code No Inox
35W METAL HALIDE	Gx8.5 Adjustable	212271
70W METAL HALIDE	G 12 Adjustable	212241
35W METAL HALIDE	Gx8.5 Adjustable	212201
70W METAL HALIDE	G 12 Adjustable	212211
150W METAL HALIDE	G 12 Adjustable	212221

EMFA

Walk Over




MIRA 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK10

The Mira series consists of a range of LED sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for Walk over up to 20 kN including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



Cover
316L Stainless steel
Body
Die cast aluminium
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless Steel
Recessing Box
Steel

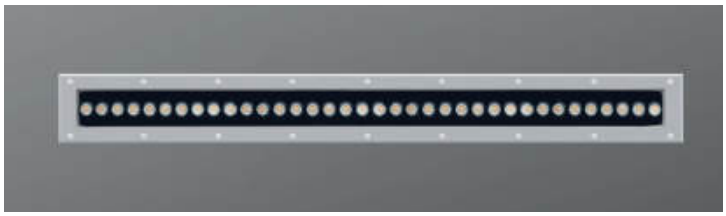

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

MIRA 5

RECESSED WALK OVER FIXTURES
Class I IP67 IK10




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 12mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red



340mm




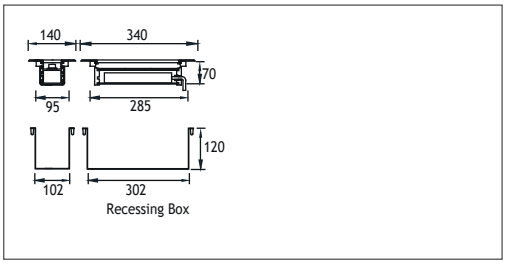

Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	855 lm	10°,25°,40°	441005
9W	3000 K	855 lm	10°,25°,40°	441001
9W	4000 K	872 lm	10°,25°,40°	441002
9W	6000 K	890 lm	10°,25°,40°	441003
27W	RGB		25°,40°	441004

644mm




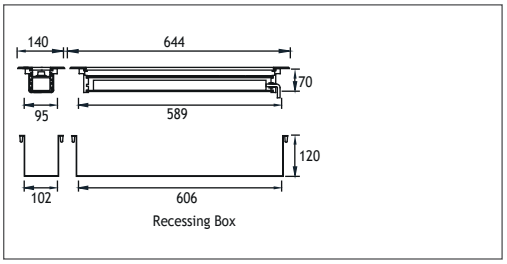

Power	Kelvin	Real Lumen Output	Lens	Code No
18W	2700 K	1710 lm	10°,25°,40°	441105
18W	3000 K	1710 lm	10°,25°,40°	441101
18W	4000 K	1744 lm	10°,25°,40°	441102
18W	6000 K	1779 lm	10°,25°,40°	441103
54W	RGB		25°,40°	441104

1040mm




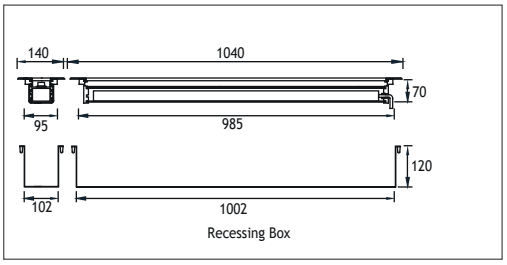

Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	441205
36W	3000 K	3420 lm	10°,25°,40°	441201
36W	4000 K	3488 lm	10°,25°,40°	441202
36W	6000 K	3557 lm	10°,25°,40°	441203
81W	RGB		25°,40°	441204

1275mm



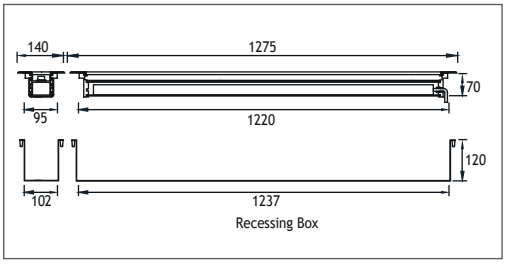

Power	Kelvin	Real Lumen Output	Lens	Code No
45W	2700 K	4275 lm	10°,25°,40°	441304
45W	3000 K	4275 lm	10°,25°,40°	441301
45W	4000 K	4360 lm	10°,25°,40°	441302
45W	6000 K	4360 lm	10°,25°,40	441303

EMFA



MILET ANI


RECESSED WALK OVER FIXTURES
Class I IP67 IK10

EMFA's Ani step mounted series is specially designed to deliver low-glare lighting to facades, columns, monuments, and trees with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LEDs. The Linear LEDs with special lenses give excellent wallwashing effect. An anti-slip glass is available upon request.





Cover
316L Stainless steel
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
8 mm Tempered Glass
Screws
316L Stainless Steel


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.




Symmetrical

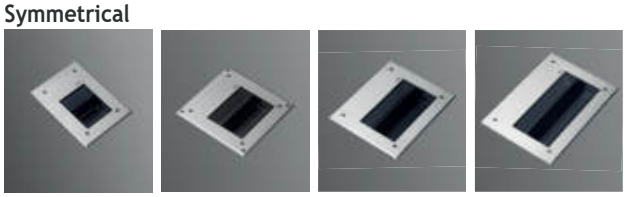




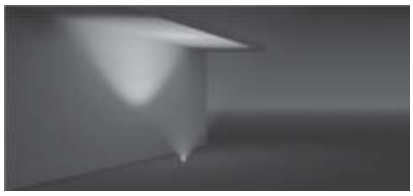





Galvanized Recessing Box

Asymmetrical

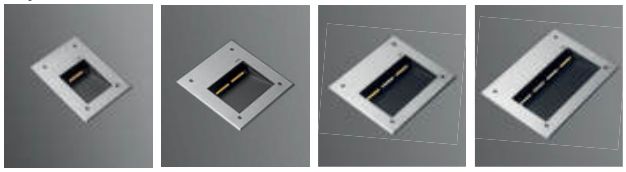



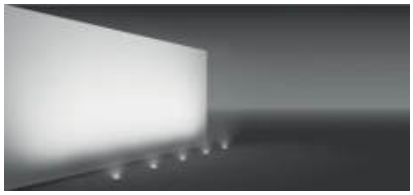

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Asym. Glass



Trenched Glass



Milky Glass



Clear Glass



MILET ANI

RECESSED WALK OVER FIXTURES
Class I IP67 IK10






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80
Cable : Potted 1m 3x1 H03 VV-F

ANI 1









Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	451003	451503
6W	3000 K	570 lm	451001	451501
6W	4000 K	581 lm	451002	451502
12W	2700 K	1140 lm	451013	451513
12W	3000 K	1140 lm	451011	451511
12W	4000 K	1195 lm	451012	451512

ANI 2









Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	451103	451603
6W	3000 K	570 lm	451101	451601
6W	4000 K	581 lm	451102	451602
12W	2700 K	1140 lm	451113	451613
12W	3000 K	1140 lm	451111	451611
12W	4000 K	1195 lm	451112	451612

ANI 3








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	451203	451703
12W	3000 K	1140 lm	451201	451701
12W	4000 K	1195 lm	451202	451702
24W	2700 K	2280 lm	451213	451713
24W	3000 K	2280 lm	451211	451711
24W	4000 K	2320 lm	451212	451712


ANI 4







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	451321	451821
24W	3000 K	2280 lm	451331	451831
24W	4000 K	2320 lm	451301	451801
36W	2700 K	3420 lm	451311	451811
36W	3000 K	3420 lm	451302	451802
36W	4000 K	3520 lm	451312	451812



Galvanized Recessing Box

EMFA

ASSOS 6

RECESSED WALK OVER FIXTURES
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Assos 6 Alum series is specially designed to light trees and bushes where drive over is not required. The fixture can be equipped with metal halide or fluorescent lamps. The fixture is made of die cast aluminium and allows for IP67 and IK10. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete. A louvre can be ordered separately to reduce the glare of the lamps. An anti-slip glass is available upon request.










Cover
Die cast aluminium
Body
Die cast aluminium or aluminium profile with
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
15 mm Tempered Glass (Aluminium Cover)
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

Mounting Features




Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.

LED LAMP








Power	Lampholder	Code No Inox
PAR30 Led Lamp	E27 Adjustable	211361

METAL HALIDE







Power	Lampholder	Code No Inox
35W METAL HALIDE	Gx8.5 Adjustable	211271
35W METAL HALIDE	G 12 Adjustable	211241
70W METAL HALIDE	Gx8.5 Adjustable	211201
70W METAL HALIDE	G 12 Adjustable	211211
150W METAL HALIDE	G 12 Adjustable	211221

MILET


RECESSED WALK OVER FIXTURES
IP67 IK10

The Milet Recessed series consists of a range of LED sources to deliver the desired light effect to facades, columns, bridges, monuments, and trees. The fixtures are made of a combination of a 316L stainless steel cover and die cast aluminium body painted with electrostatic powder paint. Tempered glass, silicone gaskets and cast resin complete the fixture to make it IP67 IK10 and withstand rough environments. For the LED versions, a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. Alternatively, a PG9 cable gland allows for a secure connection of the on-site cable. A polycarbonate recessing box is included for installation into concrete or the ground. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

Asymmetric LEDs
In this catalogue EMFA is introducing the tilted LED fixtures. These fixtures give an asymmetrical light output to facades, columns, bridges, monuments, and trees without losing light to the sky. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation of the LEDs that can run up to 350mA.



Cover
316L Stainless Steel
Body
Die cast aluminium
Recessing Box
Polycarbonate
Glands
1 x PG 9
Gaskets
Silicone
Diffusers
12 mm Tempered Glass

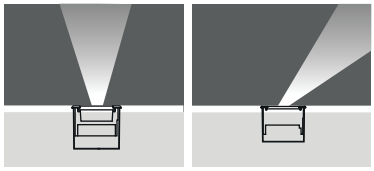

Symmetrical Asymmetrical

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.
Anti-theft Screws

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

MILET

RECESSED WALK OVER FIXTURES
IP67 IK10





Voltage : 240 V A.C with integrated driver (24V AC or DC on request)
Diffuser : 12mm Clear Glass (Frosted Glass)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

LED






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
4W	2700 K	380 lm	10°,25°,40°	425202	425212
4W	3000 K	380 lm	10°,25°,40°	425201	425211
4W	4000 K	387 lm	10°,25°,40°	425206	425216
4W	6000 K	395 lm	10°,25°,40°	425207	425217

LED LAMP






Power	Lampholder	Code No Round	Square
Led Lamp	G 9	317121	316121
Led Lamp	Gu10	317131	316131

LED LAMP





Power	Lampholder	Code No Step	Flush
Led Lamp	Gu4 12V	319101	319201

EMFA


RIXOS

BIRGI

RECESSED WALK OVER FIXTURES
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


EMFA's Birgi series is specially designed to light pathways, roads, and gardens. The fixture can be equipped with LED. The fixture has 3 different options of cover: Multi, Mono and Dual to give different lighting effects. In combination with the die cast aluminium body, the fixture allows for IP67 and IK08. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete.



Asymmetrical LEDs
These fixtures give an asymmetrical light output to facades, columns, bridges, monuments, and trees without losing light to the sky. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation of the LEDs that can run up to 700mA.


Cover
Die cast aluminium
Body
Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
Tempered press glass or polycarbonate
Screws
316L Stainless steel
Recessing Tube
Aluminium


Birgi 1 Square


Birgi 1 Round



Birgi 2 Square



Birgi 3 Square



Birgi 3 Round

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.



Mono


Dual


Quad


Multi

Mounting Features



Provide at least 30 cm of drainage gravel to avoid the accumulation of water under the fixture.
To make the fixture drive over, the recessing tube should be mounted flush to the ground.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.


EMFA


BIRGI 1

RECESSED WALK OVER FIXTURES
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Mono






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	471004
1W LED	3000 K	95 lm	471001
1W LED	4000 K	97 lm	471002
1W LED	6000 K	99 lm	471003
3W LED	2700 K	285 lm	471014
3W LED	3000 K	285 lm	471011
3W LED	4000 K	290 lm	471012
3W LED	6000 K	296 lm	471013

Dual






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	471104
1W LED	3000 K	95 lm	471101
1W LED	4000 K	97 lm	471102
1W LED	6000 K	99 lm	471103
3W LED	2700 K	285 lm	471114
3W LED	3000 K	285 lm	471111
3W LED	4000 K	290 lm	471112
3W LED	6000 K	296 lm	471113

Multi





Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	471204
1W LED	3000 K	95 lm	471201
1W LED	4000 K	97 lm	471202
1W LED	6000 K	99 lm	471203
3W LED	2700 K	285 lm	471214
3W LED	3000 K	285 lm	471211
3W LED	4000 K	290 lm	471212
3W LED	6000 K	296 lm	471213


BIRGI 1

RECESSED WALK OVER FIXTURES
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Mono






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	470004
1W LED	3000 K	95 lm	470001
1W LED	4000 K	97 lm	470002
1W LED	6000 K	99 lm	470003
3W LED	2700 K	285 lm	470014
3W LED	3000 K	285 lm	470011
3W LED	4000 K	290 lm	470012
3W LED	6000 K	296 lm	470013

Dual






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	470104
1W LED	3000 K	95 lm	470101
1W LED	4000 K	97 lm	470102
1W LED	6000 K	99 lm	470103
3W LED	2700 K	285 lm	470114
3W LED	3000 K	285 lm	470111
3W LED	4000 K	290 lm	470112
3W LED	6000 K	296 lm	470113

Quad





Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	470204
1W LED	3000 K	95 lm	470201
1W LED	4000 K	97 lm	470202
1W LED	6000 K	99 lm	470203
3W LED	2700 K	285 lm	470214
3W LED	3000 K	285 lm	470211
3W LED	4000 K	290 lm	470212
3W LED	6000 K	296 lm	470213


EMFA


BIRGI 2

RECESSED WALK OVER FIXTURES
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Mono






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	480004
1W LED	3000 K	95 lm	480001
1W LED	4000 K	97 lm	480002
1W LED	6000 K	99 lm	480003
3W LED	2700 K	285 lm	480014
3W LED	3000 K	285 lm	480011
3W LED	4000 K	290 lm	480012
3W LED	6000 K	296 lm	480013

Dual






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	480104
1W LED	3000 K	95 lm	480101
1W LED	4000 K	97 lm	480102
1W LED	6000 K	99 lm	480103
3W LED	2700 K	285 lm	480114
3W LED	3000 K	285 lm	480111
3W LED	4000 K	290 lm	480112
3W LED	6000 K	296 lm	480113

Multi






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	480204
1W LED	3000 K	95 lm	480201
1W LED	4000 K	97 lm	480202
1W LED	6000 K	99 lm	480203
3W LED	2700 K	285 lm	480214
3W LED	3000 K	285 lm	480211
3W LED	4000 K	290 lm	480212
3W LED	6000 K	296 lm	480213

BIRGI 3


RECESSED WALK OVER FIXTURES
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015







Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Polycarbonate

CRI : >80 or >90


Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Mono








Power	Kelvin	Real Lumen Output	Code No Round	Square
1W LED	2700 K	1x 95 lm	491004	490004
1W LED	3000 K	1x 95 lm	491001	490001
1W LED	4000 K	1x 97 lm	491002	490002
1W LED	6000 K	1x 99 lm	491003	490003
3W LED	2700 K	1x 285 lm	491014	490014
3W LED	3000 K	1x 285 lm	491011	490011
3W LED	4000 K	1x 290 lm	491012	490012
3W LED	6000 K	1x 296 lm	491013	490013

Dual








Power	Kelvin	Real Lumen Output	Code No Round	Square
2x 1W LED	2700 K	2x 95 lm	491104	490104
2x 1W LED	3000 K	2x 95 lm	491101	490101
2x 1W LED	4000 K	2x 97 lm	491102	490102
2x 1W LED	6000 K	2x 99 lm	491103	490103
2x 3W LED	2700 K	2x 285 lm	491114	490114
2x 3W LED	3000 K	2x 285 lm	491111	490111
2x 3W LED	4000 K	2x 290 lm	491112	490112
2x 3W LED	6000 K	2x 296 lm	491113	490113

Quad







Power	Kelvin	Real Lumen Output	Code No Round	Square
4x 1W LED	2700 K	4x 95 lm	491204	490204
4x 1W LED	3000 K	4x 95 lm	491201	490201
4x 1W LED	4000 K	4x 97 lm	491202	490202
4x 1W LED	6000 K	4x 99 lm	491203	490203
4x 3W LED	2700 K	4x 285 lm	491214	490214
4x 3W LED	3000 K	4x 285 lm	491211	490211
4x 3W LED	4000 K	4x 290 lm	491212	490212
4x 3W LED	6000 K	4x 296 lm	491213	490213

EMFA

Kaman Adjustable Recessed




EMFA

KAMAN ADJUSTABLE LED RECESSED FIXTURES IP67 IK10

The Kaman Recessed series consists of a range of LED light sources to deliver the desired light effect to facades, columns, bridges, monuments, and trees. The fixtures are made of a combination of a 316L stainless steel cover and die cast aluminium body painted with electrostatic powder paint. Tempered glass, silicone gaskets and cast resin complete the fixture to make it IP67 IK10 and withstand rough environments. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The fixtures come with an aluminium recessing tube for easy mounting in the ground or concrete. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 30 degrees are available to choose from to achieve the desired light effect.



Asymmetrical LEDs
These fixtures give an asymmetrical light output to facades, columns, bridges, monuments, and trees without losing light to the sky. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation of the LEDs that can run up to 700mA.



Adjustable




Cover
316L Stainless steel
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.



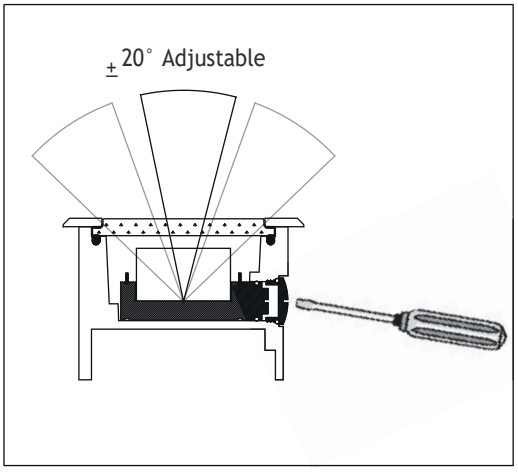

KAMAN 3

ADJUSTABLE LED RECESSED FIXTURES
IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone








Power	Color	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	240003	240103
6W LED	3000 K	570 lm	10°,20°,30°	240001	240101
6W LED	4000 K	580 lm	10°,20°,30°	240002	240102
6W LED	6000 K	592 lm	10°,20°,30°	240004	240104
11W LED	2700 K	1045 lm	10°,20°,30°	240013	240113
11W LED	3000 K	1045 lm	10°,20°,30°	240011	240111
11W LED	4000 K	1065 lm	10°,20°,30°	240012	240112
11W LED	6000 K	1088 lm	10°,20°,30°	240014	240114


Fix to Recessing Tube with Screws








Power	Color	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	241003	241103
6W LED	3000 K	570 lm	10°,20°,30°	241001	241101
6W LED	4000 K	580 lm	10°,20°,30°	241002	241102
6W LED	6000 K	592 lm	10°,20°,30°	241004	241104
11W LED	2700 K	1045 lm	10°,20°,30°	241013	241113
11W LED	3000 K	1045 lm	10°,20°,30°	241011	241111
11W LED	4000 K	1065 lm	10°,20°,30°	241012	241112
11W LED	6000 K	1088 lm	10°,20°,30°	241014	241114

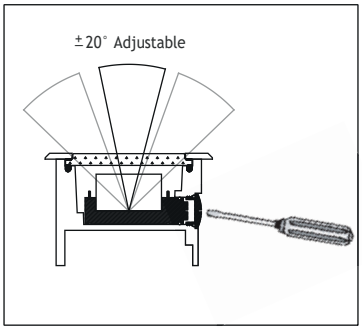




Honeycomb
Code No: 953511

BELKIS RECESSED FIXTURES IP67 IK08


The Belkis Recessed series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and trees. The fixtures are made of a combination of a 316L stainless steel cover and die cast aluminium body painted with electrostatic powder paint. Tempered glass, silicone gaskets and cast resin complete the fixture to make it IP67 IK08 and withstand rough environments. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The fixtures come with an aluminium recessing tube for easy mounting in the ground or concrete. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

Asymmetrical LEDs
These fixtures give an asymmetrical light output to facades, columns, bridges, monuments, and trees without losing light to the sky. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation of the LEDs that can run up to 700mA.

Cover
316L Stainless steel
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel

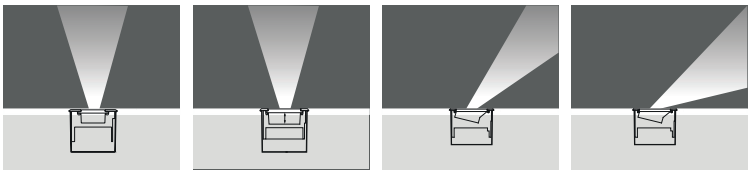


Symmetrical | Symmetrical Deep | 15° Asymmetrical | 25° Asymmetrical



Honeycomb

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

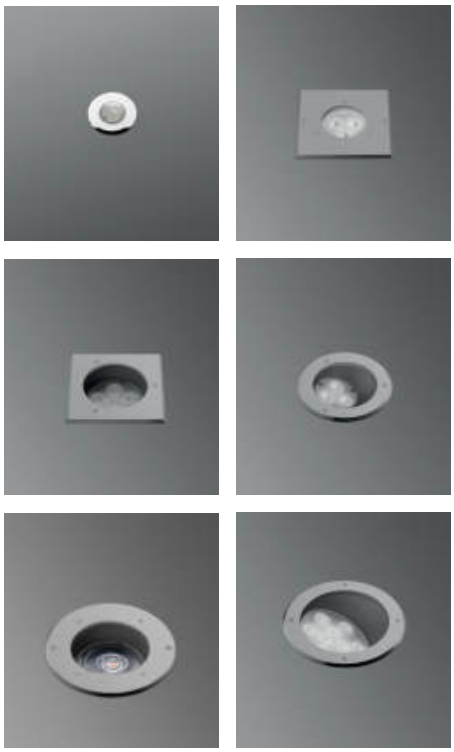

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

BELKIS MINI

RECESSED WALK OVER FIXTURES
Class I IP67 IK08




Voltage : 240 V A.C with integrated driver
(24V AC or DC on request)
Diffuser : 4mm Clear Glass (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Symmetrical






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	391004
1W LED	3000 K	95 lm	10°,25°,40°	391001
1W LED	4000 K	97 lm	10°,25°,40°	391002
1W LED	6000 K	99 lm	10°,25°,40°	391003
3W LED	2700 K	285 lm	10°,25°,40°	391104
3W LED	3000 K	285 lm	10°,25°,40°	391101
3W LED	4000 K	290 lm	10°,25°,40°	391102
3W LED	6000 K	296 lm	10°,25°,40°	391103

Symmetrical Deep







Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	391201
1W LED	3000 K	95 lm	10°,25°,40°	391202
1W LED	4000 K	97 lm	10°,25°,40°	391203
1W LED	6000 K	99 lm	10°,25°,40°	391204
3W LED	2700 K	285 lm	10°,25°,40°	391211
3W LED	3000 K	285 lm	10°,25°,40°	391212
3W LED	4000 K	290 lm	10°,25°,40°	391213
3W LED	6000 K	296 lm	10°,25°,40°	391214

Asymmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	Asymmetrical	391301
1W LED	3000 K	95 lm	Asymmetrical	391302
1W LED	4000 K	97 lm	Asymmetrical	391303
1W LED	6000 K	99 lm	Asymmetrical	391304
3W LED	2700 K	285 lm	Asymmetrical	391311
3W LED	3000 K	285 lm	Asymmetrical	391312
3W LED	4000 K	290 lm	Asymmetrical	391313
3W LED	6000 K	296 lm	Asymmetrical	391314



Honeycomb
Code No: 953714

BELKIS MINI

ASYMMETRICAL WALL RECESSED
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Cover
Die cast aluminium
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel

Voltage	: 240 V A.C with integrated driver (24V AC or DC on request)
Diffuser	: 4mm Clear Glass (Frosted Glass on request)
CRI	: >80 or >90
Cable	: Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	Asymmetrical	309201
1W LED	3000 K	95 lm	Asymmetrical	309202
1W LED	4000 K	97 lm	Asymmetrical	309203
1W LED	6000 K	99 lm	Asymmetrical	309204
3W LED	2700 K	285 lm	Asymmetrical	309211
3W LED	3000 K	285 lm	Asymmetrical	309212
3W LED	4000 K	290 lm	Asymmetrical	309213
3W LED	6000 K	296 lm	Asymmetrical	309214

Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	Asymmetrical	309221
6W LED	3000 K	570 lm	Asymmetrical	309222
6W LED	4000 K	585 lm	Asymmetrical	309223
6W LED	6000 K	592 lm	Asymmetrical	309224

12V - 24V (240V A.C with external driver)



Honeycomb
Code No: 953714

EMFA



BELKIS 1 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





Voltage : 240V A.C with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	425192	425292
1W LED	3000 K	95 lm	10°,25°,40°	425191	425291
1W LED	4000 K	97 lm	10°,25°,40°	425196	425296
1W LED	6000 K	99 lm	10°,25°,40°	425197	425297
3W LED	2700 K	285 lm	10°,25°,40°	405504	405514
3W LED	3000 K	285 lm	10°,25°,40°	405501	405511
3W LED	4000 K	290 lm	10°,25°,40°	405502	405512
3W LED	6000 K	296 lm	10°,25°,40°	405503	405513

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	405544	405554
1W LED	3000 K	95 lm	10°,25°,40°	405541	405551
1W LED	4000 K	97 lm	10°,25°,40°	405542	405552
1W LED	6000 K	99 lm	10°,25°,40°	405543	405553
3W LED	2700 K	285 lm	10°,25°,40°	405584	405594
3W LED	3000 K	285 lm	10°,25°,40°	405581	405591
3W LED	4000 K	290 lm	10°,25°,40°	405582	405592
3W LED	6000 K	296 lm	10°,25°,40°	405583	405593


Led Lamp







Power	Lampholder	Code No Round	Square
12V Led Lamp	Gu4	320101	320201



Honeycomb
Code No: 953521

EMFA

BELKIS 1 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





Voltage : 240V A.C with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	425182	425282
1W LED	3000 K	95 lm	10°,25°,40°	425181	425281
1W LED	4000 K	97 lm	10°,25°,40°	425186	425286
1W LED	6000 K	99 lm	10°,25°,40°	425187	425287
3W LED	2700 K	285 lm	10°,25°,40°	405524	405534
3W LED	3000 K	285 lm	10°,25°,40°	405521	405531
3W LED	4000 K	290 lm	10°,25°,40°	405522	405532
3W LED	6000 K	296 lm	10°,25°,40°	405523	405533

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	405564	405574
1W LED	3000 K	95 lm	10°,25°,40°	405561	405571
1W LED	4000 K	97 lm	10°,25°,40°	405562	405572
1W LED	6000 K	99 lm	10°,25°,40°	405563	405573
3W LED	2700 K	285 lm	10°,25°,40°	405604	405614
3W LED	3000 K	285 lm	10°,25°,40°	405601	405611
3W LED	4000 K	290 lm	10°,25°,40°	405602	405612
3W LED	6000 K	296 lm	10°,25°,40°	405603	405613


Led Lamp







Power	Lampholder	Code No Round	Square
12V Led Lamp	Gu4	320111	320211



Honeycomb
Code No: 953521



BELKIS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass 8mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	422102	422112
3W LED	3000 K	285 lm	10°,25°,40°	422101	422111
3W LED	4000 K	290 lm	10°,25°,40°	422106	422116
3W LED	6000 K	296 lm	10°,25°,40°	422107	422117
9W LED	2700 K	855 lm	10°,25°,40°	418334	418344
9W LED	3000 K	855 lm	10°,25°,40°	418331	418341
9W LED	4000 K	872 lm	10°,25°,40°	418332	418342
9W LED	6000 K	890 lm	10°,25°,40°	418333	418343
9W LED	RGB		25°,40°	418371	418381

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	439001	439101
3W LED	3000 K	285 lm	10°,25°,40°	439002	439102
3W LED	4000 K	290 lm	10°,25°,40°	439003	439103
3W LED	6000 K	296 lm	10°,25°,40°	439004	439104
9W LED	2700 K	855 lm	10°,25°,40°	439011	439111
9W LED	3000 K	855 lm	10°,25°,40°	439012	439112
9W LED	4000 K	872 lm	10°,25°,40°	439013	439113
9W LED	6000 K	890 lm	10°,25°,40°	439014	439114
9W LED	RGB		25°,40°	439015	439115


Wallwasher







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	326004	326014
1W LED	3000 K	95 lm	10°,25°,40°	326001	326011
1W LED	4000 K	97 lm	10°,25°,40°	326002	326012
1W LED	6000 K	99 lm	10°,25°,40°	326003	326013
3W LED	2700 K	285 lm	10°,25°,40°	326044	326054
3W LED	3000 K	285 lm	10°,25°,40°	326041	326051
3W LED	4000 K	290 lm	10°,25°,40°	326042	326052
3W LED	6000 K	296 lm	10°,25°,40°	326043	326053



Honeycomb
Code No: 953522

BELKIS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240 VAC with integrated driver
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418394	418404
3W LED	3000 K	285 lm	10°,25°,40°	418391	418401
3W LED	4000 K	290 lm	10°,25°,40°	418392	418402
3W LED	6000 K	296 lm	10°,25°,40°	418393	418403
9W LED	2700 K	855 lm	10°,25°,40°	418434	418444
9W LED	3000 K	855 lm	10°,25°,40°	418431	418441
9W LED	4000 K	872 lm	10°,25°,40°	418432	418442
9W LED	6000 K	890 lm	10°,25°,40°	418433	418443
9W LED	RGB		25°,40°	418471	418481

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418514	418524
3W LED	3000 K	285 lm	10°,25°,40°	418511	418521
3W LED	4000 K	290 lm	10°,25°,40°	418512	418522
3W LED	6000 K	296 lm	10°,25°,40°	418513	418523
9W LED	2700 K	855 lm	10°,25°,40°	418554	418564
9W LED	3000 K	855 lm	10°,25°,40°	418551	418561
9W LED	4000 K	872 lm	10°,25°,40°	418552	418562
9W LED	6000 K	890 lm	10°,25°,40°	418553	418563
9W LED	RGB		25°,40°	418591	418601


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418634	418644
3W LED	3000 K	285 lm	10°,25°,40°	418631	418641
3W LED	4000 K	290 lm	10°,25°,40°	418632	418642
3W LED	6000 K	296 lm	10°,25°,40°	418633	418643
9W LED	2700 K	855 lm	10°,25°,40°	418674	418684
9W LED	3000 K	855 lm	10°,25°,40°	418671	418681
9W LED	4000 K	872 lm	10°,25°,40°	418672	418682
9W LED	6000 K	890 lm	10°,25°,40°	418673	418683
9W LED	RGB		25°,40	418711	418721



Honeycomb
Code No: 953522

EMFA

BELKIS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240 VAC with integrated driver
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	425162	425262
3W LED	3000 K	285 lm	10°,25°,40°	425161	425261
3W LED	4000 K	290 lm	10°,25°,40°	425166	425266
3W LED	6000 K	296 lm	10°,25°,40°	425167	425267
9W LED	2700 K	855 lm	10°,25°,40°	418354	418364
9W LED	3000 K	855 lm	10°,25°,40°	418351	418361
9W LED	4000 K	872 lm	10°,25°,40°	418352	418362
9W LED	6000 K	890 lm	10°,25°,40°	418353	418363
9W LED	RGB		25°,40°	425411	425421

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	442001	442101
3W LED	3000 K	285 lm	10°,25°,40°	442002	442102
3W LED	4000 K	290 lm	10°,25°,40°	442003	442103
3W LED	6000 K	296 lm	10°,25°,40°	442004	442104
9W LED	2700 K	855 lm	10°,25°,40°	442011	442111
9W LED	3000 K	855 lm	10°,25°,40°	442012	442112
9W LED	4000 K	872 lm	10°,25°,40°	442013	442113
9W LED	6000 K	890 lm	10°,25°,40°	442014	442114
9W LED	RGB		25°,40°	442015	442115


Wallwasher







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	326024	326034
1W LED	3000 K	95 lm	10°,25°,40°	326021	326031
1W LED	4000 K	97 lm	10°,25°,40°	326022	326032
1W LED	6000 K	99 lm	10°,25°,40°	326023	326033
3W LED	2700 K	285 lm	10°,25°,40°	326064	326074
3W LED	3000 K	285 lm	10°,25°,40°	326061	326071
3W LED	4000 K	290 lm	10°,25°,40°	326062	326072
3W LED	6000 K	296 lm	10°,25°,40°	326063	326073



Honeycomb
Code No: 953522

BELKIS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240 VAC with integrated driver
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418414	418424
3W LED	3000 K	285 lm	10°,25°,40°	418411	418421
3W LED	4000 K	290 lm	10°,25°,40°	418412	418422
3W LED	6000 K	296 lm	10°,25°,40°	418413	418423
9W LED	2700 K	855 lm	10°,25°,40°	418454	418464
9W LED	3000 K	855 lm	10°,25°,40°	418451	418461
9W LED	4000 K	872 lm	10°,25°,40°	418452	418462
9W LED	6000 K	890 lm	10°,25°,40°	418453	418463
9W LED	RGB		25°,40°	418491	418501

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418534	418544
3W LED	3000 K	285 lm	10°,25°,40°	418531	418541
3W LED	4000 K	290 lm	10°,25°,40°	418532	418542
3W LED	6000 K	296 lm	10°,25°,40°	418533	418543
9W LED	2700 K	855 lm	10°,25°,40°	418874	418584
9W LED	3000 K	855 lm	10°,25°,40°	418871	418581
9W LED	4000 K	872 lm	10°,25°,40°	418872	418582
9W LED	6000 K	890 lm	10°,25°,40°	418873	418583
9W LED	RGB		25°,40°	418611	418621


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	418654	418664
3W LED	3000 K	285 lm	10°,25°,40°	418651	418661
3W LED	4000 K	290 lm	10°,25°,40°	418652	418662
3W LED	6000 K	296 lm	10°,25°,40°	418653	418663
9W LED	2700 K	855 lm	10°,25°,40°	418694	418704
9W LED	3000 K	855 lm	10°,25°,40°	418691	418701
9W LED	4000 K	872 lm	10°,25°,40°	418692	418702
9W LED	6000 K	890 lm	10°,25°,40°	418693	418703
9W LED	RGB		25°,40	418731	418741




Honeycomb
Code No: 953522

EMFA

BELKIS 2 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	119003	119013
6W LED	3000 K	570 lm	10°,20°,30°	119001	119011
6W LED	4000 K	581 lm	10°,20°,30°	119002	119012
6W LED	6000 K	593 lm	10°,20°,30°	119004	119014
11W LED	2700 K	1045 lm	10°,20°,30°	119023	119033
11W LED	3000 K	1045 lm	10°,20°,30°	119021	119031
11W LED	4000 K	1065 lm	10°,20°,30°	119022	119032
11W LED	6000 K	1087 lm	10°,20°,30°	119024	119034

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	122001	122101
6W LED	3000 K	570 lm	10°,20°,30°	122002	122102
6W LED	4000 K	581 lm	10°,20°,30°	122003	122103
6W LED	6000 K	593 lm	10°,20°,30°	122004	122104
11W LED	2700 K	1045 lm	10°,20°,30°	122011	122111
11W LED	3000 K	1045 lm	10°,20°,30°	122012	122112
11W LED	4000 K	1065 lm	10°,20°,30°	122013	122113
11W LED	6000 K	1087 lm	10°,20°,30°	122014	122114


Led Lamp







Power	Lampholder	Code No Round	Square
Led Lamp	Gu10	322101	322201



Honeycomb
Code No: 953522

BELKIS 2 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Silicone

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	139001	139101
6W LED	3000 K	570 lm	10°,25°,40°	139002	139102
6W LED	4000 K	581 lm	10°,25°,40°	139003	139103
6W LED	6000 K	593 lm	10°,25°,40°	139004	139104
11W LED	2700 K	1045 lm	10°,25°,40°	139011	139111
11W LED	3000 K	1045 lm	10°,25°,40°	139012	139112
11W LED	4000 K	1065 lm	10°,25°,40°	139013	139113
11W LED	6000 K	1087 lm	10°,25°,40°	139014	139114

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	119203	119213
6W LED	3000 K	570 lm	10°,25°,40°	119201	119211
6W LED	4000 K	581 lm	10°,25°,40°	119202	119212
6W LED	6000 K	593 lm	10°,25°,40°	119204	119214
11W LED	2700 K	1045 lm	10°,25°,40°	119223	119233
11W LED	3000 K	1045 lm	10°,25°,40°	119221	119231
11W LED	4000 K	1065 lm	10°,25°,40°	119222	119232
11W LED	6000 K	1087 lm	10°,25°,40°	119224	119234


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	119403	119413
6W LED	3000 K	570 lm	10°,25°,40°	119401	119411
6W LED	4000 K	581 lm	10°,25°,40°	119402	119412
6W LED	6000 K	593 lm	10°,25°,40°	119404	119414
11W LED	2700 K	1045 lm	10°,25°,40°	119423	119433
11W LED	3000 K	1045 lm	10°,25°,40°	119421	119431
11W LED	4000 K	1065 lm	10°,25°,40°	119422	119432
11W LED	6000 K	1087 lm	10°,25°,40°	119424	119434



Honeycomb
Code No: 953522

EMFA


HYDE

BELKIS 2 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	119103	119113
6W LED	3000 K	570 lm	10°,25°,40°	119101	119111
6W LED	4000 K	581 lm	10°,25°,40°	119102	119112
6W LED	6000 K	593 lm	10°,25°,40°	119104	119114
11W LED	2700 K	1045 lm	10°,25°,40°	119123	119133
11W LED	3000 K	1045 lm	10°,25°,40°	119121	119131
11W LED	4000 K	1065 lm	10°,25°,40°	119122	119132
11W LED	6000 K	1087 lm	10°,25°,40°	119124	119134

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	140001	140101
6W LED	3000 K	570 lm	10°,25°,40°	140002	140102
6W LED	4000 K	581 lm	10°,25°,40°	140003	140103
6W LED	6000 K	593 lm	10°,25°,40°	140004	140104
11W LED	2700 K	1045 lm	10°,25°,40°	140011	140111
11W LED	3000 K	1045 lm	10°,25°,40°	140012	140112
11W LED	4000 K	1065 lm	10°,25°,40°	140013	140113
11W LED	6000 K	1087 lm	10°,25°,40°	140014	140114


Led Lamp








Power	Lampholder	Code No Round	Square
Led Lamp	Gu10	322121	322221



Honeycomb
Code No: 953522

EMFA

BELKIS 2 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Screws

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	141001	141101
6W LED	3000 K	570 lm	10°,20°,30°	141002	141102
6W LED	4000 K	581 lm	10°,20°,30°	141003	141103
6W LED	6000 K	593 lm	10°,20°,30°	141004	141104
11W LED	2700 K	1045 lm	10°,20°,30°	141011	141111
11W LED	3000 K	1045 lm	10°,20°,30°	141012	141112
11W LED	4000 K	1065 lm	10°,20°,30°	141013	141113
11W LED	6000 K	1087 lm	10°,20°,30°	141014	141114

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	119304	119313
6W LED	3000 K	570 lm	10°,20°,30°	119301	119311
6W LED	4000 K	581 lm	10°,20°,30°	119302	119312
6W LED	6000 K	593 lm	10°,20°,30°	119305	119314
11W LED	2700 K	1045 lm	10°,20°,30°	119323	119333
11W LED	3000 K	1045 lm	10°,20°,30°	119321	119331
11W LED	4000 K	1065 lm	10°,20°,30°	119322	119332
11W LED	6000 K	1087 lm	10°,20°,30°	119324	119334


25° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	119503	119513
6W LED	3000 K	570 lm	10°,20°,30°	119501	119511
6W LED	4000 K	581 lm	10°,20°,30°	119502	119512
6W LED	6000 K	593 lm	10°,20°,30°	119504	119514
11W LED	2700 K	1045 lm	10°,20°,30°	119523	119533
11W LED	3000 K	1045 lm	10°,20°,30°	119521	119531
11W LED	4000 K	1065 lm	10°,20°,30°	119522	119532
11W LED	6000 K	1087 lm	10°,20°,30°	119524	119534



Honeycomb
Code No: 953522

BELKIS 3 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	422204	422212
6W LED	3000 K	570 lm	10°,25°,40°	422201	422211
6W LED	4000 K	581 lm	10°,25°,40°	422202	422216
6W LED	6000 K	593 lm	10°,25°,40°	422203	422217
18W LED	RGB		25°,40°	422261	422271

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	326104	326114
6W LED	3000 K	570 lm	10°,25°,40°	326101	326111
6W LED	4000 K	581 lm	10°,25°,40°	326102	326112
6W LED	6000 K	593 lm	10°,25°,40°	326103	326113
18W LED	RGB		25°,40°	326141	326151

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	423104	423114
6W LED	3000 K	570 lm	10°,25°,40°	423101	423111
6W LED	4000 K	581 lm	10°,25°,40°	423102	423112
6W LED	6000 K	593 lm	10°,25°,40°	423103	423113
18W LED	RGB		25°,40°	423141	423151


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	423184	423194
6W LED	3000 K	570 lm	10°,25°,40°	423181	423191
6W LED	4000 K	581 lm	10°,25°,40°	423182	423192
6W LED	6000 K	593 lm	10°,25°,40°	423183	423193
18W LED	RGB		25°,40°	423221	423231



Honeycomb
Code No: 953523

EMFA

S



BELKIS 3 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	422222	422232
6W LED	3000 K	570 lm	10°,25°,40°	422221	422231
6W LED	4000 K	581 lm	10°,25°,40°	422226	422236
6W LED	6000 K	593 lm	10°,25°,40°	422227	422237
18W LED	RGB		25°,40°	422241	422251

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	326124	326134
6W LED	3000 K	570 lm	10°,25°,40°	326121	326131
6W LED	4000 K	581 lm	10°,25°,40°	326122	326132
6W LED	6000 K	593 lm	10°,25°,40°	326123	326133
18W LED	RGB		25°,40°	326401	326411

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	423124	423134
6W LED	3000 K	570 lm	10°,25°,40°	423121	423131
6W LED	4000 K	581 lm	10°,25°,40°	423122	423132
6W LED	6000 K	593 lm	10°,25°,40°	423123	423133
18W LED	RGB		25°,40°	423161	423171


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	423204	423214
6W LED	3000 K	570 lm	10°,25°,40°	423201	423211
6W LED	4000 K	581 lm	10°,25°,40°	423202	423212
6W LED	6000 K	593 lm	10°,25°,40°	423203	423213
18W LED	RGB		25°,40°	423241	423251



Honeycomb
Code No: 953523

EMFA

BELKIS 3 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	119603	119613
6W LED	3000 K	570 lm	10°,20°,30°	119601	119611
6W LED	4000 K	581 lm	10°,20°,30°	119622	119632
6W LED	6000 K	593 lm	10°,20°,30°	119624	119634
11W LED	2700 K	1045 lm	10°,20°,30°	119623	119633
11W LED	3000 K	1045 lm	10°,20°,30°	119621	119631
11W LED	4000 K	1065 lm	10°,20°,30°	119602	119612
11W LED	6000 K	1087 lm	10°,20°,30°	119604	119614

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	120801	120811
6W LED	3000 K	570 lm	10°,20°,30°	120802	120812
6W LED	4000 K	581 lm	10°,20°,30°	120823	120833
6W LED	6000 K	593 lm	10°,20°,30°	120824	120834
11W LED	2700 K	1045 lm	10°,20°,30°	120821	120831
11W LED	3000 K	1045 lm	10°,20°,30°	120822	120832
11W LED	4000 K	1065 lm	10°,20°,30°	120803	120813
11W LED	6000 K	1087 lm	10°,20°,30°	120804	120814

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	119803	119813
6W LED	3000 K	570 lm	10°,20°,30°	119801	119811
6W LED	4000 K	581 lm	10°,20°,30°	119842	119852
6W LED	6000 K	593 lm	10°,20°,30°	119844	119854
11W LED	2700 K	1045 lm	10°,20°,30°	119843	119853
11W LED	3000 K	1045 lm	10°,20°,30°	119841	119851
11W LED	4000 K	1065 lm	10°,20°,30°	119802	119812
11W LED	6000 K	1087 lm	10°,20°,30°	119804	119814


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,20°,30°	120003	120013
6W LED	3000 K	570 lm	10°,20°,30°	120001	120011
6W LED	4000 K	581 lm	10°,20°,30°	120042	120052
6W LED	6000 K	593 lm	10°,20°,30°	120044	120054
11W LED	2700 K	1045 lm	10°,20°,30°	120043	120053
11W LED	3000 K	1045 lm	10°,20°,30°	120041	120051
11W LED	4000 K	1065 lm	10°,20°,30°	120002	120012
11W LED	6000 K	1087 lm	10°,20°,30°	120004	120014



Honeycomb
Code No: 953523

BELKIS 3 RECESSED WALK OVER WITH TIR LENS FIXTURES
Class I IP67 IK08





COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
6W LED	2700 K	570 lm	10°,20°,30°	119703	119713
6W LED	3000 K	570 lm	10°,20°,30°	119701	119711
6W LED	4000 K	581 lm	10°,20°,30°	119722	119732
6W LED	6000 K	593 lm	10°,20°,30°	119724	119734
11W LED	2700 K	1045 lm	10°,20°,30°	119723	119733
11W LED	3000 K	1045 lm	10°,20°,30°	119721	119731
11W LED	4000 K	1065 lm	10°,20°,30°	119702	119712
11W LED	6000 K	1087 lm	10°,20°,30°	119704	119714

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
6W LED	2700 K	570 lm	10°,20°,30°	120901	120911
6W LED	3000 K	570 lm	10°,20°,30°	120902	120912
6W LED	4000 K	581 lm	10°,20°,30°	120923	120933
6W LED	6000 K	593 lm	10°,20°,30°	120924	120934
11W LED	2700 K	1045 lm	10°,20°,30°	120921	120931
11W LED	3000 K	1045 lm	10°,20°,30°	120922	120932
11W LED	4000 K	1065 lm	10°,20°,30°	120903	120913
11W LED	6000 K	1087 lm	10°,20°,30°	120904	120914

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
6W LED	2700 K	570 lm	10°,20°,30°	119903	119913
6W LED	3000 K	570 lm	10°,20°,30°	119901	119911
6W LED	4000 K	581 lm	10°,20°,30°	119942	119952
6W LED	6000 K	593 lm	10°,20°,30°	119944	119954
11W LED	2700 K	1045 lm	10°,20°,30°	119943	119953
11W LED	3000 K	1045 lm	10°,20°,30°	119941	119951
11W LED	4000 K	1065 lm	10°,20°,30°	119902	119912
11W LED	6000 K	1087 lm	10°,20°,30°	119904	119914


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
6W LED	2700 K	570 lm	10°,20°,30°	121003	121013
6W LED	3000 K	570 lm	10°,20°,30°	121041	121051
6W LED	4000 K	581 lm	10°,20°,30°	121022	121032
6W LED	6000 K	593 lm	10°,20°,30°	121024	121034
11W LED	2700 K	1045 lm	10°,20°,30°	121023	121033
11W LED	3000 K	1045 lm	10°,20°,30°	121021	121031
11W LED	4000 K	1065 lm	10°,20°,30°	121042	121052
11W LED	6000 K	1087 lm	10°,20°,30°	121004	121014



Honeycomb
Code No: 953523

EMFA



BELKIS 4 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
9W LED	2700 K	855 lm	10°,25°,40°	422302	422312
9W LED	3000 K	855 lm	10°,25°,40°	422301	422311
9W LED	4000 K	872 lm	10°,25°,40°	422306	422316
9W LED	6000 K	890 lm	10°,25°,40°	422307	422317

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
9W LED	2700 K	855 lm	10°,25°,40°	326204	326214
9W LED	3000 K	855 lm	10°,25°,40°	326201	326211
9W LED	4000 K	872 lm	10°,25°,40°	326202	326212
9W LED	6000 K	890 lm	10°,25°,40°	326203	326213

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
18W COB LED	2700 K	1710 lm	10°,20°,30°	120203	120213
18W COB LED	3000 K	1710 lm	10°,20°,30°	120201	120211
18W COB LED	4000 K	1744 lm	10°,20°,30°	120202	120212
18W COB LED	6000 K	1779 lm	10°,20°,30°	120204	120214


Symmetrical Deep







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
13W COB LED	2700 K	1235 lm	24°,38°	326303	326313
13W COB LED	3000 K	1235 lm	24°,38°	326301	326311
13W COB LED	4000 K	1259 lm	24°,38°	326302	326312
13W COB LED	6000 K	1259 lm	24°,38°	326304	326314



Honeycomb
Code No: 953524

EMFA

BELKIS 4 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	422322	422332
9W LED	3000 K	855 lm	10°,25°,40°	422321	422331
9W LED	4000 K	872 lm	10°,25°,40°	422326	422336
9W LED	6000 K	890 lm	10°,25°,40°	422327	422337

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	326224	326234
9W LED	3000 K	855 lm	10°,25°,40°	326221	326231
9W LED	4000 K	872 lm	10°,25°,40°	326222	326232
9W LED	6000 K	890 lm	10°,25°,40°	326223	326233

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
18W COB LED	2700 K	1710 lm	10°,20°,30°	120303	120313
18W COB LED	3000 K	1710 lm	10°,20°,30°	120301	120311
18W COB LED	4000 K	1744 lm	10°,20°,30°	120302	120312
18W COB LED	6000 K	1779 lm	10°,20°,30°	120304	120314


Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
13W COB LED	2700 K	1235 lm	24°,38°	326323	326333
13W COB LED	3000 K	1235 lm	24°,38°	326321	326331
13W COB LED	4000 K	1259 lm	24°,38°	326322	326332
13W COB LED	6000 K	1259 lm	24°,38°	326324	326334



Honeycomb
Code No: 953524

BELKIS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	422422	422432
9W LED	3000 K	855 lm	10°,25°,40°	422421	422431
9W LED	4000 K	872 lm	10°,25°,40°	422426	422436
9W LED	6000 K	890 lm	10°,25°,40°	422427	422437
27W LED	2700 K	2560 lm	10°,25°,40°	423304	423314
27W LED	3000 K	2560 lm	10°,25°,40°	423301	423311
27W LED	4000 K	2610 lm	10°,25°,40°	423302	423312
27W LED	6000 K	2670 lm	10°,25°,40°	423303	423313
27W LED	RGB		25°,40°	423341	423351

Wallwasher








Power	Kelvin	Real Lumen Output	Reflector	Code No Round	Square
13W COB LED	2700 K	1235 lm	Asymmetrical	423704	423714
13W COB LED	3000 K	1235 lm	Asymmetrical	423701	423711
13W COB LED	4000 K	1259 lm	Asymmetrical	423702	423712
13W COB LED	6000 K	1284 lm	Asymmetrical	423703	423713


Symmetrical Led Lamp







Power	Lampholder	Code No Round	Square
PAR30 Led Lamp	E27	324111	324211



Honeycomb
Code No: 953525

EMFA

BELKIS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

15°Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	423604	423614
27W LED	3000 K	2560 lm	10°,25°,40°	423601	423611
27W LED	4000 K	2610 lm	10°,25°,40°	423602	423612
27W LED	6000 K	2670 lm	10°,25°,40°	423603	423613
27W LED	RGB		25°,40°	423401	423411

25°Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	423644	423654
27W LED	3000 K	2560 lm	10°,25°,40°	423641	423651
27W LED	4000 K	2610 lm	10°,25°,40°	423642	423652
27W LED	6000 K	2670 lm	10°,25°,40°	423643	423653
27W LED	RGB		25°,40°	423481	423491

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
25W COB LED	2700 K	2375 lm	10°,20°,30°	120403	120413
25W COB LED	3000 K	2375 lm	10°,20°,30°	120401	120411
25W COB LED	4000 K	2422 lm	10°,20°,30°	120402	120412
25W COB LED	6000 K	2470 lm	10°,20°,30°	120404	120414


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
25W COB LED	2700 K	2375 lm	10°,20°,30°	120603	120613
25W COB LED	3000 K	2375 lm	10°,20°,30°	120601	120611
25W COB LED	4000 K	2422 lm	10°,20°,30°	120602	120612
25W COB LED	6000 K	2470 lm	10°,20°,30°	120604	120614



Honeycomb
Code No: 953525

BELKIS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	422442	422452
9W LED	3000 K	855 lm	10°,25°,40°	422441	422451
9W LED	4000 K	872 lm	10°,25°,40°	422446	422456
9W LED	6000 K	890 lm	10°,25°,40°	422447	422457
27W LED	2700 K	2560 lm	10°,25°,40°	423324	423334
27W LED	3000 K	2560 lm	10°,25°,40°	423321	423331
27W LED	4000 K	2610 lm	10°,25°,40°	423322	423332
27W LED	6000 K	2670 lm	10°,25°,40°	423323	423333
27W LED	RGB		25°,40°	422381	422491

Wallwasher








Power	Kelvin	Real Lumen Output	Reflector	Code No Round	Square
13W COB LED	2700 K	1235 lm	Asymmetrical	423724	423734
13W COB LED	3000 K	1235 lm	Asymmetrical	423721	423731
13W COB LED	4000 K	1259 lm	Asymmetrical	423722	423732
13W COB LED	6000 K	1284 lm	Asymmetrical	423723	423733


Symmetrical Led Lamp







Power	Lampholder	Code No Round	Square
PAR30 Led Lamp	E27	324121	324221



Honeycomb
Code No: 953525

EMFA

BELKIS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

15°Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	423624	423634
27W LED	3000 K	2560 lm	10°,25°,40°	423621	423631
27W LED	4000 K	2610 lm	10°,25°,40°	423622	423632
27W LED	6000 K	2670 lm	10°,25°,40°	423623	423633
27W LED	RGB		25°,40°	423421	423431

25°Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	423664	423674
27W LED	3000 K	2560 lm	10°,25°,40°	423661	423671
27W LED	4000 K	2610 lm	10°,25°,40°	423662	423672
27W LED	6000 K	2670 lm	10°,25°,40°	423663	423673
27W LED	RGB		25°,40°	423501	423511

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
25W COB LED	2700 K	2375 lm	10°,20°,30°	120503	120513
25W COB LED	3000 K	2375 lm	10°,20°,30°	120501	120511
25W COB LED	4000 K	2422 lm	10°,20°,30°	120502	120512
25W COB LED	6000 K	2470 lm	10°,20°,30°	120504	120514


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
25W COB LED	2700 K	2375 lm	10°,20°,30°	120703	120713
25W COB LED	3000 K	2375 lm	10°,20°,30°	120701	120711
25W COB LED	4000 K	2422 lm	10°,20°,30°	120702	120712
25W COB LED	6000 K	2470 lm	10°,20°,30°	120704	120714



Honeycomb
Code No: 953525






PATNOS RECESSED FIXTURES IP67 IK08


The Patnos series is an adaption of the Belkis Recessed series using less or no visible screws. No screws are visible on the cover if silicone is used to glue the fixture to the recessing tube. The series is designed to light walls, facades, columns, monuments, and trees. The fixtures are made of a combination of a 316L stainless steel cover and die cast aluminium body painted with electro-static powder paint. Tempered glass, silicone gaskets and cast resin complete the fixture to make it IP67 IK08 and withstand rough environments. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The fixtures come with an aluminium recessing tube for easy mounting in the ground or concrete. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

Asymmetrical LEDs
In this catalogue EMFA is introducing the tilted LED fixtures. These fixtures give an asymmetrical light output to facades, columns, bridges, monuments, and trees without losing light to the sky. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation of the LEDs that can run up to 700mA.

Cover
316L Stainless steel
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel

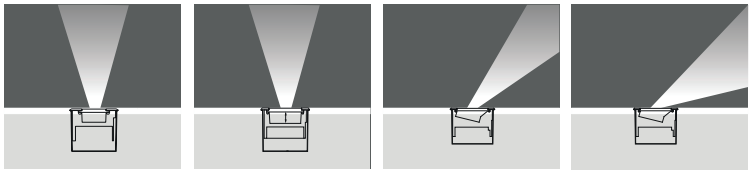


Symmetrical | Symmetrical Deep | 15° Asymmetrical | 25° Asymmetrical



Honeycomb

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

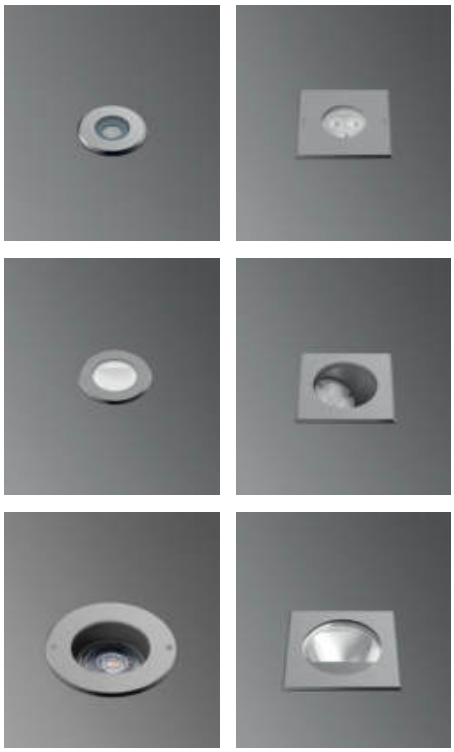

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

PATNOS 1 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





Voltage : 240V A.C with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
1W LED	2700 K	95 lm	10°,25°,40°	160004	160014
1W LED	3000 K	95 lm	10°,25°,40°	160001	160011
1W LED	4000 K	97 lm	10°,25°,40°	160002	160012
1W LED	6000 K	99 lm	10°,25°,40°	160003	160013
3W LED	2700 K	285 lm	10°,25°,40°	160044	160054
3W LED	3000 K	285 lm	10°,25°,40°	160041	160051
3W LED	4000 K	290 lm	10°,25°,40°	160042	160052
3W LED	6000 K	296 lm	10°,25°,40°	160043	160053


7° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
1W LED	2700 K	95 lm	10°,25°,40°	160204	160214
1W LED	3000 K	95 lm	10°,25°,40°	160201	160211
1W LED	4000 K	97 lm	10°,25°,40°	160202	160212
1W LED	6000 K	99 lm	10°,25°,40°	160203	160213
3W LED	2700 K	285 lm	10°,25°,40°	160244	160254
3W LED	3000 K	285 lm	10°,25°,40°	160241	160251
3W LED	4000 K	290 lm	10°,25°,40°	160242	160252
3W LED	6000 K	296 lm	10°,25°,40°	160243	160253



Honeycomb
Code No: 953521

PATNOS 1 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





Voltage : 240V A.C with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	160024	160034
1W LED	3000 K	95 lm	10°,25°,40°	160021	160031
1W LED	4000 K	97 lm	10°,25°,40°	160022	160032
1W LED	6000 K	99 lm	10°,25°,40°	160023	160033
3W LED	2700 K	285 lm	10°,25°,40°	160064	160074
3W LED	3000 K	285 lm	10°,25°,40°	160061	160071
3W LED	4000 K	290 lm	10°,25°,40°	160062	160072
3W LED	6000 K	296 lm	10°,25°,40°	160063	160073


7° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	160224	160234
1W LED	3000 K	95 lm	10°,25°,40°	160221	160231
1W LED	4000 K	97 lm	10°,25°,40°	160222	160232
1W LED	6000 K	99 lm	10°,25°,40°	160223	160233
3W LED	2700 K	285 lm	10°,25°,40°	160264	160274
3W LED	3000 K	285 lm	10°,25°,40°	160261	160271
3W LED	4000 K	290 lm	10°,25°,40°	160262	160272
3W LED	6000 K	296 lm	10°,25°,40°	160263	160273



Honeycomb
Code No: 953521

PATNOS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161004	161014
3W LED	3000 K	285 lm	10°,25°,40°	161001	161011
3W LED	4000 K	290 lm	10°,25°,40°	161002	161012
3W LED	6000 K	296 lm	10°,25°,40°	161003	161013
9W LED	2700 K	855 lm	10°,25°,40°	161044	161054
9W LED	3000 K	855 lm	10°,25°,40°	161041	161051
9W LED	4000 K	872 lm	10°,25°,40°	161042	161052
9W LED	6000 K	890 lm	10°,25°,40°	161043	161053
9W LED	RGB		25°,40°	161081	161091

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	165001	165101
3W LED	3000 K	285 lm	10°,25°,40°	165002	165102
3W LED	4000 K	290 lm	10°,25°,40°	165003	165103
3W LED	6000 K	296 lm	10°,25°,40°	165004	165104
9W LED	2700 K	855 lm	10°,25°,40°	165011	165111
9W LED	3000 K	855 lm	10°,25°,40°	165012	165112
9W LED	4000 K	872 lm	10°,25°,40°	165013	165113
9W LED	6000 K	890 lm	10°,25°,40°	165014	165114
9W LED	RGB		25°,40°	165015	165115


Wallwasher







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	161604	161614
1W LED	3000 K	95 lm	10°,25°,40°	161601	161611
1W LED	4000 K	97 lm	10°,25°,40°	161602	161612
1W LED	6000 K	99 lm	10°,25°,40°	161603	161613
3W LED	2700 K	285 lm	10°,25°,40°	161644	161654
3W LED	3000 K	285 lm	10°,25°,40°	161641	161651
3W LED	4000 K	290 lm	10°,25°,40°	161642	161652
3W LED	6000 K	296 lm	10°,25°,40°	161643	161653



Honeycomb
Code No: 953522

EMFA

PATNOS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
3W LED	2700 K	285 lm	10°,25°,40°	161204	161214
3W LED	3000 K	285 lm	10°,25°,40°	161201	161211
3W LED	4000 K	290 lm	10°,25°,40°	161202	161212
3W LED	6000 K	296 lm	10°,25°,40°	161203	161213
9W LED	2700 K	855 lm	10°,25°,40°	161244	161254
9W LED	3000 K	855 lm	10°,25°,40°	161241	161251
9W LED	4000 K	872 lm	10°,25°,40°	161242	161252
9W LED	6000 K	890 lm	10°,25°,40°	161243	161253
9W LED	RGB		25°,40°	161281	161291

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
3W LED	2700 K	285 lm	10°,25°,40°	161324	161334
3W LED	3000 K	285 lm	10°,25°,40°	161321	161331
3W LED	4000 K	290 lm	10°,25°,40°	161322	161332
3W LED	6000 K	296 lm	10°,25°,40°	161323	161333
9W LED	2700 K	855 lm	10°,25°,40°	161364	161374
9W LED	3000 K	855 lm	10°,25°,40°	161361	161371
9W LED	4000 K	872 lm	10°,25°,40°	161362	161372
9W LED	6000 K	890 lm	10°,25°,40°	161363	161373
9W LED	RGB		25°,40°	161401	161411


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Code No Square
3W LED	2700 K	285 lm	10°,25°,40°	161444	161454
3W LED	3000 K	285 lm	10°,25°,40°	161441	161451
3W LED	4000 K	290 lm	10°,25°,40°	161442	161452
3W LED	6000 K	296 lm	10°,25°,40°	161443	161453
9W LED	2700 K	855 lm	10°,25°,40°	161484	161494
9W LED	3000 K	855 lm	10°,25°,40°	161481	161491
9W LED	4000 K	872 lm	10°,25°,40°	161482	161492
9W LED	6000 K	890 lm	10°,25°,40°	161483	161493
9W LED	RGB		25°,40°	161521	161531



Honeycomb
Code No: 953522

PATNOS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161024	161034
3W LED	3000 K	285 lm	10°,25°,40°	161021	161031
3W LED	4000 K	290 lm	10°,25°,40°	161022	161032
3W LED	6000 K	296 lm	10°,25°,40°	161023	161033
9W LED	2700 K	855 lm	10°,25°,40°	161064	161074
9W LED	3000 K	855 lm	10°,25°,40°	161061	161071
9W LED	4000 K	872 lm	10°,25°,40°	161062	161072
9W LED	6000 K	890 lm	10°,25°,40°	161063	161073
9W LED	RGB		25°,40°	161101	161111

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161701	161801
3W LED	3000 K	285 lm	10°,25°,40°	161702	161802
3W LED	4000 K	290 lm	10°,25°,40°	161703	161803
3W LED	6000 K	296 lm	10°,25°,40°	161704	161804
9W LED	2700 K	855 lm	10°,25°,40°	161711	161811
9W LED	3000 K	855 lm	10°,25°,40°	161712	161812
9W LED	4000 K	872 lm	10°,25°,40°	161713	161813
9W LED	6000 K	890 lm	10°,25°,40°	161714	161814
9W LED	RGB		25°,40°	161715	161815


Wallwasher







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	161624	161634
1W LED	3000 K	95 lm	10°,25°,40°	161621	161631
1W LED	4000 K	97 lm	10°,25°,40°	161622	161632
1W LED	6000 K	99 lm	10°,25°,40°	161623	161633
3W LED	2700 K	285 lm	10°,25°,40°	161664	161674
3W LED	3000 K	285 lm	10°,25°,40°	161661	161671
3W LED	4000 K	290 lm	10°,25°,40°	161662	161672
3W LED	6000 K	296 lm	10°,25°,40°	161663	161673



Honeycomb
Code No: 953522

EMFA

PATNOS 2 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

7° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161224	161234
3W LED	3000 K	285 lm	10°,25°,40°	161221	161231
3W LED	4000 K	290 lm	10°,25°,40°	161222	161232
3W LED	6000 K	296 lm	10°,25°,40°	161223	161233
9W LED	2700 K	855 lm	10°,25°,40°	161264	161274
9W LED	3000 K	855 lm	10°,25°,40°	161261	161271
9W LED	4000 K	872 lm	10°,25°,40°	161262	161272
9W LED	6000 K	890 lm	10°,25°,40°	161263	161273
9W LED	RGB		25°,40°	161301	161311

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161344	161354
3W LED	3000 K	285 lm	10°,25°,40°	161341	161351
3W LED	4000 K	290 lm	10°,25°,40°	161342	161352
3W LED	6000 K	296 lm	10°,25°,40°	161343	161353
9W LED	2700 K	855 lm	10°,25°,40°	161384	161394
9W LED	3000 K	855 lm	10°,25°,40°	161381	161391
9W LED	4000 K	872 lm	10°,25°,40°	161382	161392
9W LED	6000 K	890 lm	10°,25°,40°	161383	161393
9W LED	RGB		25°,40°	161421	161431


25° Asymmetrical









Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	161464	161474
3W LED	3000 K	285 lm	10°,25°,40°	161461	161471
3W LED	4000 K	290 lm	10°,25°,40°	161462	161472
3W LED	6000 K	296 lm	10°,25°,40°	161463	161473
9W LED	2700 K	855 lm	10°,25°,40°	161504	161514
9W LED	3000 K	855 lm	10°,25°,40°	161501	161511
9W LED	4000 K	872 lm	10°,25°,40°	161502	161512
9W LED	6000 K	890 lm	10°,25°,40°	161503	161513
9W LED	RGB		25°,40°	161541	161551



Honeycomb
Code No: 953522

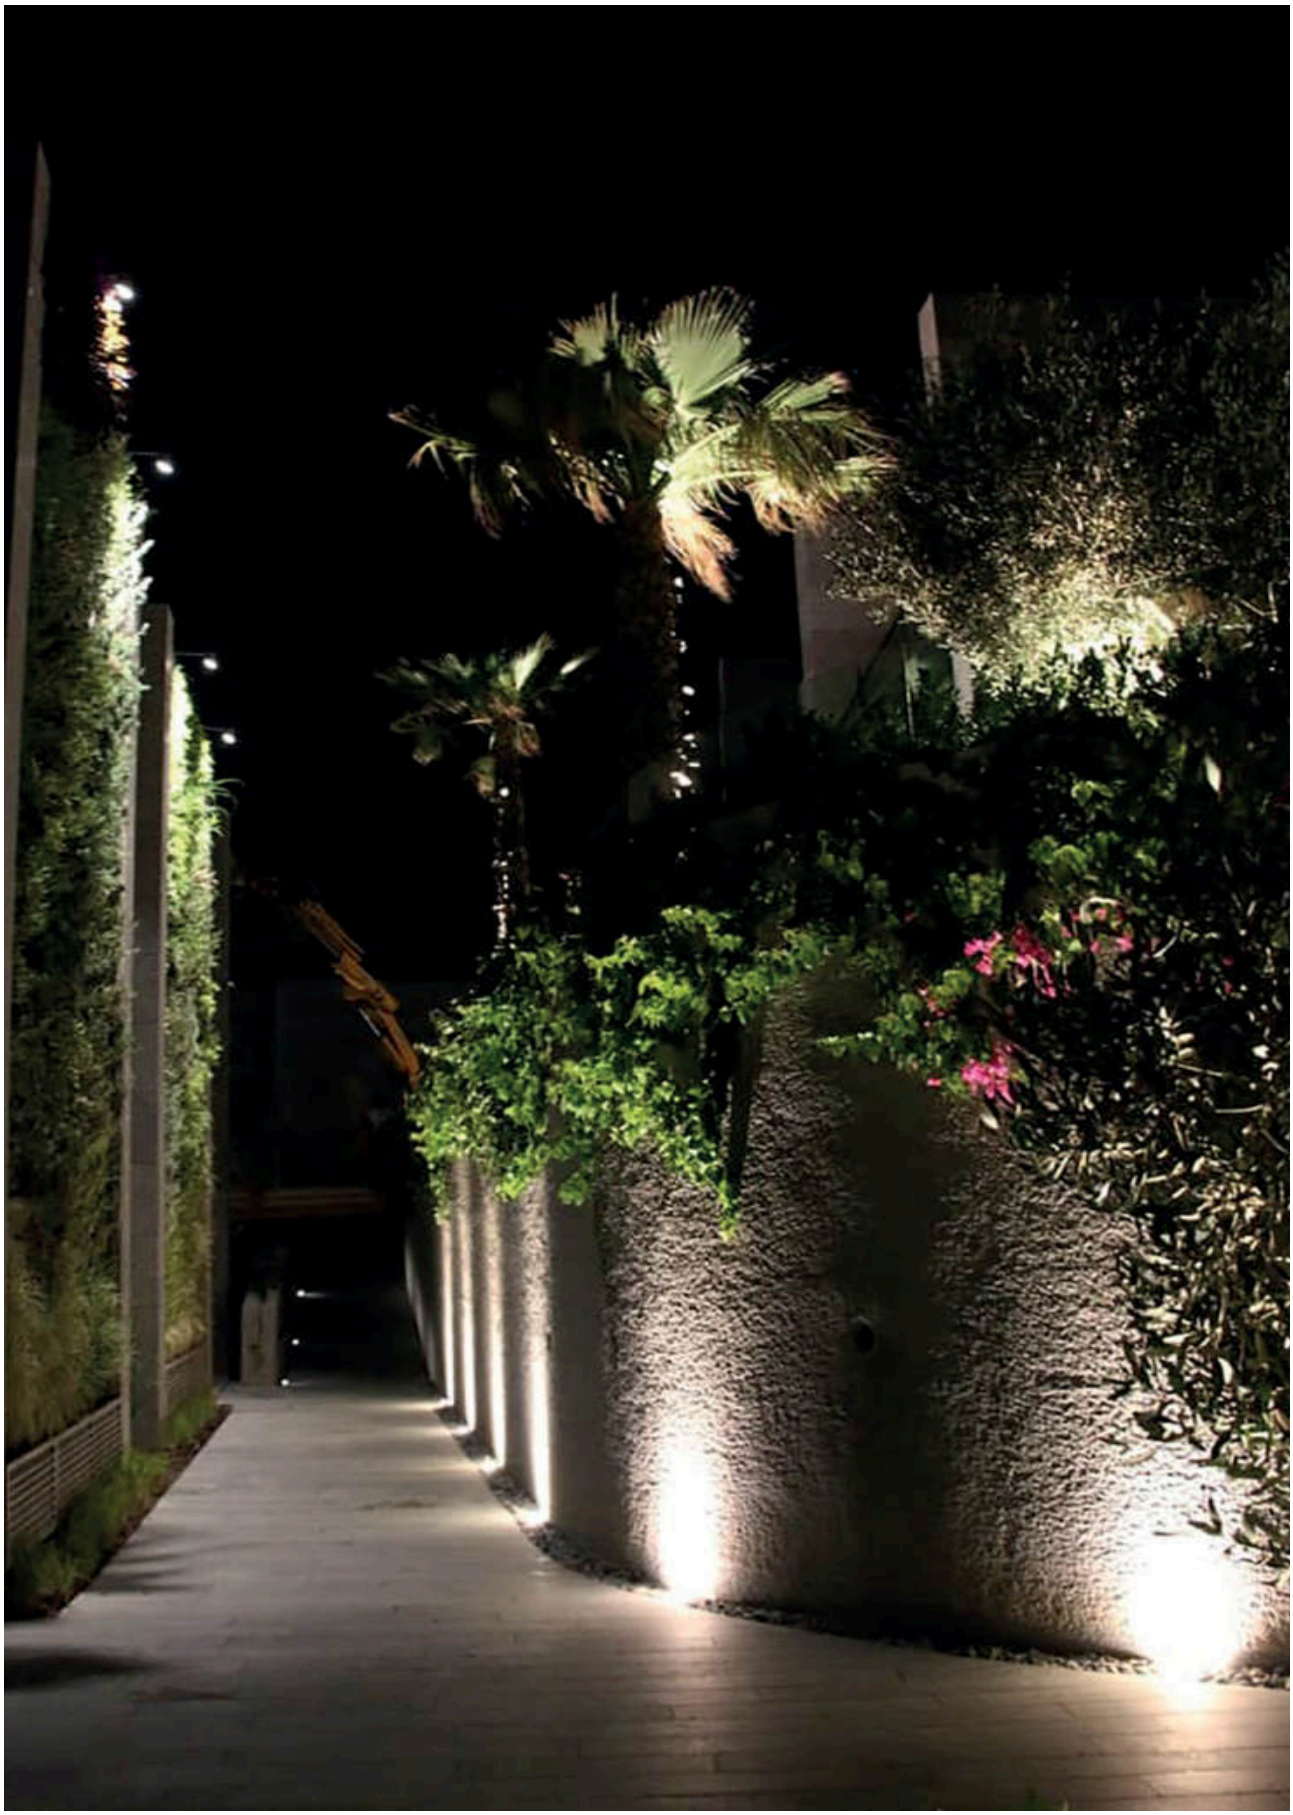

PATNOS 3 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162004	162014
6W LED	3000 K	570 lm	10°,25°,40°	162001	162011
6W LED	4000 K	581 lm	10°,25°,40°	162002	162012
6W LED	6000 K	593 lm	10°,25°,40°	162003	162013
18W LED	RGB		25°,40°	162041	162051

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162404	162414
6W LED	3000 K	570 lm	10°,25°,40°	162401	162411
6W LED	4000 K	581 lm	10°,25°,40°	162402	162412
6W LED	6000 K	593 lm	10°,25°,40°	162403	162413
18W LED	RGB		25°,40°	162501	162511

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162204	162214
6W LED	3000 K	570 lm	10°,25°,40°	162201	162211
6W LED	4000 K	581 lm	10°,25°,40°	162202	162212
6W LED	6000 K	593 lm	10°,25°,40°	162203	162213
18W LED	RGB		25°,40°	162241	162251


25° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162284	162294
6W LED	3000 K	570 lm	10°,25°,40°	162281	162291
6W LED	4000 K	581 lm	10°,25°,40°	162282	162292
6W LED	6000 K	593 lm	10°,25°,40°	162283	162293
18W LED	RGB		25°,40°	162321	162331



Honeycomb
Code No: 953523

PATNOS 3 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162024	162034
6W LED	3000 K	570 lm	10°,25°,40°	162021	162031
6W LED	4000 K	581 lm	10°,25°,40°	162022	162032
6W LED	6000 K	593 lm	10°,25°,40°	162023	162033
18W LED	RGB		25°,40°	162061	162071

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162424	162434
6W LED	3000 K	570 lm	10°,25°,40°	162421	162431
6W LED	4000 K	581 lm	10°,25°,40°	162422	162432
6W LED	6000 K	593 lm	10°,25°,40°	162423	162433
18W LED	RGB		25°,40°	162601	162611

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162224	162234
6W LED	3000 K	570 lm	10°,25°,40°	162221	162231
6W LED	4000 K	581 lm	10°,25°,40°	162222	162232
6W LED	6000 K	593 lm	10°,25°,40°	162223	162233
18W LED	RGB		25°,40°	162261	162271


25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
6W LED	2700 K	570 lm	10°,25°,40°	162304	162314
6W LED	3000 K	570 lm	10°,25°,40°	162301	162311
6W LED	4000 K	581 lm	10°,25°,40°	162302	162312
6W LED	6000 K	593 lm	10°,25°,40°	162303	162313
18W LED	RGB		25°,40°	162341	162351



Honeycomb
Code No: 953523

EMFA



PATNOS 4 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	163004	163014
9W LED	3000 K	855 lm	10°,25°,40°	163001	163011
9W LED	4000 K	872 lm	10°,25°,40°	163002	163012
9W LED	6000 K	890 lm	10°,25°,40°	163003	163013

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	163104	163114
9W LED	3000 K	855 lm	10°,25°,40°	163101	163111
9W LED	4000 K	872 lm	10°,25°,40°	163102	163112
9W LED	6000 K	890 lm	10°,25°,40°	163103	163113

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
18W COB LED	2700 K	1710 lm	10°,20°,30°	163201	163211
18W COB LED	3000 K	1710 lm	10°,20°,30°	163202	163212
18W COB LED	4000 K	1744 lm	10°,20°,30°	163203	163213
18W COB LED	6000 K	1779 lm	10°,20°,30°	163204	163214


Symmetrical Deep







Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
13W COB LED	2700 K	1235 lm	24°,38°	163143	163153
13W COB LED	3000 K	1235 lm	24°,38°	163141	163151
13W COB LED	4000 K	1259 lm	24°,38°	163142	163152
13W COB LED	6000 K	1259 lm	24°,38°	163144	163154



Honeycomb
Code No: 953524

EMFA

PATNOS 4 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	163024	163034
9W LED	3000 K	855 lm	10°,25°,40°	163021	163031
9W LED	4000 K	872 lm	10°,25°,40°	163022	163032
9W LED	6000 K	890 lm	10°,25°,40°	163023	163033

Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	163124	163134
9W LED	3000 K	855 lm	10°,25°,40°	163121	163131
9W LED	4000 K	872 lm	10°,25°,40°	163122	163132
9W LED	6000 K	890 lm	10°,25°,40°	163123	163133

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
18W COB LED	2700 K	1710 lm	10°,20°,30°	163301	163311
18W COB LED	3000 K	1710 lm	10°,20°,30°	163302	163312
18W COB LED	4000 K	1744 lm	10°,20°,30°	163303	163313
18W COB LED	6000 K	1779 lm	10°,20°,30°	163304	163314


Symmetrical Deep








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
13W COB LED	2700 K	1235 lm	24°,38°	163163	163173
13W COB LED	3000 K	1235 lm	24°,38°	163161	163171
13W COB LED	4000 K	1259 lm	24°,38°	163162	163172
13W COB LED	6000 K	1259 lm	24°,38°	163164	163174



Honeycomb
Code No: 953524



PATNOS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Silicone

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164044	164054
27W LED	3000 K	2560 lm	10°,25°,40°	164041	164051
27W LED	4000 K	2610 lm	10°,25°,40°	164042	164052
27W LED	6000 K	2670 lm	10°,25°,40°	164043	164053
27W LED	RGB		25°,40°	164081	164091

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164704	164714
27W LED	3000 K	2560 lm	10°,25°,40°	164701	164711
27W LED	4000 K	2610 lm	10°,25°,40°	164702	164712
27W LED	6000 K	2670 lm	10°,25°,40°	164703	164713
27W LED	RGB		25°,40°	164241	164251

25° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164744	164754
27W LED	3000 K	2560 lm	10°,25°,40°	164741	164751
27W LED	4000 K	2610 lm	10°,25°,40°	164742	164752
27W LED	6000 K	2670 lm	10°,25°,40°	164743	164753
27W LED	RGB		25°,40°	164321	164331


Wallwasher







Power	Kelvin	Real Lumen Output	Reflector	Code No Round	Square
13W COB LED	2700 K	1235 lm	Asymmetrical	164804	164814
13W COB LED	3000 K	1235 lm	Asymmetrical	164801	164811
13W COB LED	4000 K	1259 lm	Asymmetrical	164802	164812
13W COB LED	6000 K	1284 lm	Asymmetrical	164803	164813



Honeycomb
Code No: 953525

PATNOS 5 RECESSED WALK OVER FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red

Fix to Recessing Tube with Screws

Symmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164064	164074
27W LED	3000 K	2560 lm	10°,25°,40°	164061	164071
27W LED	4000 K	2610 lm	10°,25°,40°	164062	164072
27W LED	6000 K	2670 lm	10°,25°,40°	164063	164073
27W LED	RGB		25°,40°	164101	164111

15° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164724	164734
27W LED	3000 K	2560 lm	10°,25°,40°	164721	164731
27W LED	4000 K	2610 lm	10°,25°,40°	164722	164732
27W LED	6000 K	2670 lm	10°,25°,40°	164723	164733
27W LED	RGB		25°,40°	164261	164271

25° Asymmetrical








Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
27W LED	2700 K	2560 lm	10°,25°,40°	164764	164774
27W LED	3000 K	2560 lm	10°,25°,40°	164761	164771
27W LED	4000 K	2610 lm	10°,25°,40°	164762	164772
27W LED	6000 K	2670 lm	10°,25°,40°	164763	164773
27W LED	RGB		25°,40°	164341	164351


Wallwasher







Power	Kelvin	Real Lumen Output	Reflector	Code No Round	Square
13W COB LED	2700 K	1235 lm	Asymmetrical	164824	164834
13W COB LED	3000 K	1235 lm	Asymmetrical	164821	164831
13W COB LED	4000 K	1259 lm	Asymmetrical	164822	164832
13W COB LED	6000 K	1284 lm	Asymmetrical	164823	164833




Honeycomb
Code No: 953525

EMFA


GORDION RECESSED LED FIXTURES
Class I IP67 IK08

The Gordion series is an adaption of the Belkis Recessed series without the stainless steel cover. Merely a painted glass finishes the look of the fixture. Once placed inside the stainless steel tube, the fixture can only be removed with a special tool. The Gordion series is designed to light walls, facades, columns, monuments, and trees. The fixtures are made of die cast aluminium body painted with electrostatic powder paint. Tempered glass, silicone gaskets and cast resin complete the fixture to make it IP67 IK08 and withstand rough environments. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

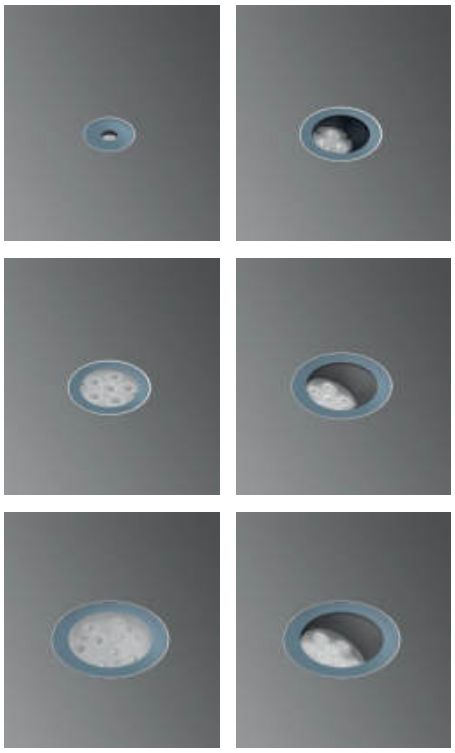


Body
Die cast aluminium
Recessing Tube
316L Stainless steel
Gaskets
Silicone
Diffusers
Tempered Glass with painted circumference

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

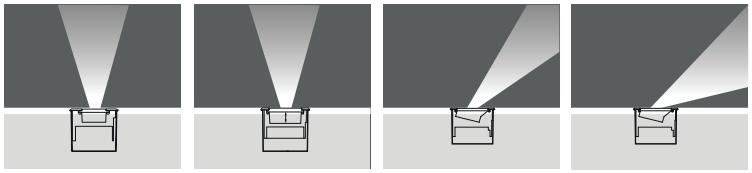

Symmetrical | Symmetrical Deep | 15° Asymmetrical | 25° Asymmetrical



Honeycomb

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

GORDION

RECESSED LED FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Gordion 1
Symmetrical **7° Asymmetrical**








Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical	Code No 7° Asymmetrical
1W LED	2700 K	95 lm	10°,25°,40°	170004	170014
1W LED	3000 K	95 lm	10°,25°,40°	170001	170011
1W LED	4000 K	97 lm	10°,25°,40°	170002	170012
1W LED	6000 K	99 lm	10°,25°,40°	170003	170013

Gordion 2
Symmetrical **7° Asymmetrical**








Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical	Code No 7° Asymmetrical
3W LED	2700 K	285 lm	10°,25°,40°	170104	170114
3W LED	3000 K	285 lm	10°,25°,40°	170101	170111
3W LED	4000 K	290 lm	10°,25°,40°	170102	170112
3W LED	6000 K	296 lm	10°,25°,40°	170103	170113


Gordion 2
15° Asymmetrical **25° Asymmetrical**







Power	Kelvin	Real Lumen Output	Lens	Code No 15° Asymmetrical	Code No 25° Asymmetrical
9W LED	2700 K	855 lm	10°,25°,40°	170144	170154
9W LED	3000 K	855 lm	10°,25°,40°	170141	170151
9W LED	4000 K	872 lm	10°,25°,40°	170142	170152
9W LED	6000 K	890 lm	10°,25°,40°	170143	170153



Honeycomb
Gordion 1: 953521
Gordion 2: 953522

EMFA

GORDION

RECESSED LED FIXTURES
Class I IP67 IK08





POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)


CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Gordion 3
Symmetrical






Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical
6W LED	2700 K	570 lm	10°,25°,40°	170204
6W LED	3000 K	570 lm	10°,25°,40°	170201
6W LED	4000 K	581 lm	10°,25°,40°	170202
6W LED	6000 K	593 lm	10°,25°,40°	170203

Gordion 3
15° Asymmetrical



25° Asymmetrical







Power	Kelvin	Real Lumen Output	Lens	Code No 15° Asymmetrical	Code No 25° Asymmetrical
6W LED	2700 K	570 lm	10°,25°,40°	170214	170224
6W LED	3000 K	570 lm	10°,25°,40°	170211	170221
6W LED	4000 K	581 lm	10°,25°,40°	170212	170222
6W LED	6000 K	593 lm	10°,25°,40°	170213	170223

Gordion 4
Symmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical
9W LED	2700 K	855 lm	10°,25°,40°	170304
9W LED	3000 K	855 lm	10°,25°,40°	170301
9W LED	4000 K	872 lm	10°,25°,40°	170302
9W LED	6000 K	890 lm	10°,25°,40°	170303



Honeycomb
Gordion 3: 953523
Gordion 4: 953524

GORDION

RECESSED LED FIXTURES
Class I IP67 IK08



POWER LED (COB LED options available)

Voltage : 240V A.C with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass **8**mm (Frosted Glass on request)


CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Gordion 5
Symmetrical






Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical
9W LED	2700 K	855 lm	10°,25°,40°	170404
9W LED	3000 K	855 lm	10°,25°,40°	170401
9W LED	4000 K	872 lm	10°,25°,40°	170402
9W LED	6000 K	890 lm	10°,25°,40°	170403


Gordion 5
15° Asymmetrical **25° Asymmetrical**







Power	Kelvin	Real Lumen Output	Lens	Code No 15° Asymmetrical	Code No 25° Asymmetrical
9W LED	2700 K	855 lm	10°,25°,40°	170414	170424
9W LED	3000 K	855 lm	10°,25°,40°	170411	170421
9W LED	4000 K	872 lm	10°,25°,40°	170412	170422
9W LED	6000 K	890 lm	10°,25°,40°	170413	170423



Honeycomb
Code No: 953525

EMFA

Wall Recessed




MILET ANI

WALL RECESSED
Class I IP65 IK08

Available in any of these RAL colors




EMFA's Ani wall recessed series is specially designed to deliver low-glare lighting to facades, walkways, pathways and driveways with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LEDs. The Linear LEDs with special lenses give excellent wallwashing effect. An anti-slip glass is available upon request.

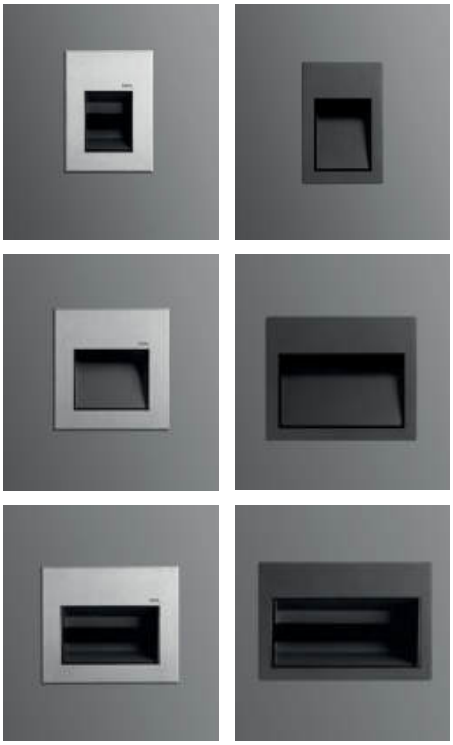

Cover
316L Stainless steel or Aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
4 mm Tempered Glass or 8 mm Tempered Glass
Screws
316L Stainless Steel
Glands
PG 11


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Symmetrical

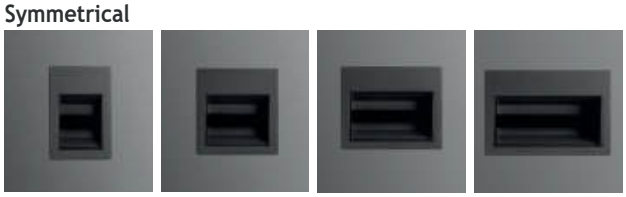




Asymmetrical

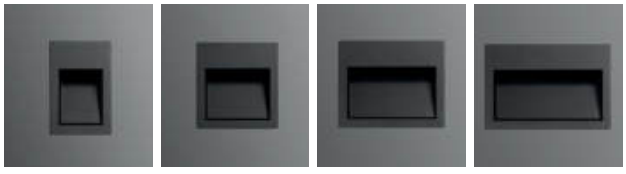






Galvanized Recessing Box



end of the code number "s" add for Screw mounting option for

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Asym. Glass




Trenched Glass



Milky Glass



Clear Glass



MILET ANI

WALL RECESSED
Class I IP67 IK08






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1 Inox








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	456003	456503
6W	3000 K	570 lm	456001	456501
6W	4000 K	581 lm	456002	456502
12W	2700 K	1140 lm	456013	456513
12W	3000 K	1140 lm	456011	456511
12W	4000 K	1195 lm	456012	456512

ANI 2 Inox








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	456103	456603
6W	3000 K	570 lm	456101	456601
6W	4000 K	581 lm	456102	456602
12W	2700 K	1140 lm	456113	456613
12W	3000 K	1140 lm	456111	456611
12W	4000 K	1195 lm	456112	456612

ANI 3 Inox








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	456203	456703
12W	3000 K	1140 lm	456201	456701
12W	4000 K	1195 lm	456202	456702
24W	2700 K	2280 lm	456213	456713
24W	3000 K	2280 lm	456211	456711
24W	4000 K	2320 lm	456212	456712


ANI 4 Inox







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	456303	456803
24W	3000 K	2280 lm	456301	456801
24W	4000 K	2320 lm	456302	456802
36W	2700 K	3420 lm	456313	456813
36W	3000 K	3420 lm	456311	456811
36W	4000 K	3520 lm	456312	456812



Galvanized Recessing Box

EMFA



MILET ANI

WALL RECESSED
Class I IP67 IK08






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1 Alum








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	455003	455503
6W	3000 K	570 lm	455001	455501
6W	4000 K	581 lm	455002	455502
12W	2700 K	1140 lm	455013	455513
12W	3000 K	1140 lm	455011	455511
12W	4000 K	1195 lm	455012	455512

ANI 2 Alum








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	455103	455603
6W	3000 K	570 lm	455101	455601
6W	4000 K	581 lm	455102	455602
12W	2700 K	1140 lm	455113	455613
12W	3000 K	1140 lm	455111	455611
12W	4000 K	1195 lm	455112	455612

ANI 3 Alum








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	455203	455703
12W	3000 K	1140 lm	455201	455701
12W	4000 K	1195 lm	455202	455702
24W	2700 K	2280 lm	455213	455713
24W	3000 K	2280 lm	455211	455711
24W	4000 K	2320 lm	455212	455712


ANI 4 Alum







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	455303	455803
24W	3000 K	2280 lm	455301	455801
24W	4000 K	2320 lm	455302	455802
36W	2700 K	3420 lm	455313	455813
36W	3000 K	3420 lm	455311	455811
36W	4000 K	3520 lm	455312	455812



Galvanized Recessing Box

EMFA

SANTOS 6 WALL RECESSED FIXTURES
Class I IP67 IK10

EMFA's Santos 6 Wall Recessed Fixture is specially designed to deliver glare-free lighting in open areas and pathways. The combination of the ribbed glass, which creates a horizontal elliptical light output and the lamp cover, which hides the source of light, allows for an unobtrusive comfortable lighting effect. The fixture is made of a combination of 316L stainless steel and aluminium. The narrow depth of 159 mm allows the fixture to be installed in most walls. The electronic ballast is housed in the thermally separated base of the fixture.





Cover
316L Stainless steel
Body
Die cast aluminium or aluminium profile with
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
5 mm ribbed tempered Glass
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F



Adjustable








Power	Kelvin	Real Lumen Output	Lens	Code No Symmetrical	Code No Asymmetrical
9W	2700 K	855 lm	10°,23°,36°	552301	552401
18W	2700 K	1710 lm	10°,23°,36°	552311	552411
9W	3000 K	855 lm	10°,23°,36°	552302	552402
18W	3000 K	1710 lm	10°,23°,36°	552121	552221
9W	4000 K	872 lm	10°,23°,36°	552303	552403
18W	4000 K	1744 lm	10°,23°,36°	552122	552222

MIRA

WALL RECESSED FIXTURE
Class I IP67 IK10

The Mira series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for wall mounting including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



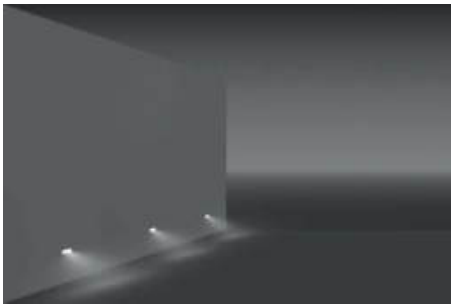


Cover
316L Stainless steel
Body
Die cast aluminium
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless steel
Recessing Box
Stainless steel



Asymmetrical

Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 12 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F





Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	430374
12W	3000 K	1140 lm	10°,25°,40°	430371
12W	4000 K	1160 lm	10°,25°,40°	430372
12W	6000 K	1185 lm	10°,25°,40°	430373
27W	RGB		25°,40°	430381

EMFA



BELKIS

WALL RECESSED FIXTURE
Class II IP65 IK08



COB LED

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8mm (Frosted Glass on request)


CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

Belkis 3 Fix to Recessing Tube with Silicone








Power	Kelvin	Real Lumen Output	Code No Round	Code No Square
7W LED	2700 K	665 lm	423263	423283
7W LED	3000 K	665 lm	423261	423281
7W LED	4000 K	678 lm	423262	423282
7W LED	6000 K	690 lm	423264	423284

Belkis 3 Fix to Recessing Tube with Screws








Power	Kelvin	Real Lumen Output	Code No Round	Code No Square
7W LED	2700 K	665 lm	423273	423293
7W LED	3000 K	665 lm	423271	423291
7W LED	4000 K	678 lm	423272	423292
7W LED	6000 K	690 lm	423274	423294

Belkis 4 Fix to Recessing Tube with Silicone








Power	Kelvin	Real Lumen Output	Code No Round	Code No Square
11W LED	2700 K	1045 lm	423903	423923
11W LED	3000 K	1045 lm	423901	423921
11W LED	4000 K	1065 lm	423902	423922
11W LED	6000 K	1087 lm	423904	423924

Belkis 4 Fix to Recessing Tube with Screws







Power	Kelvin	Real Lumen Output	Code No Round	Code No Square
11W LED	2700 K	1045 lm	423913	423933
11W LED	3000 K	1045 lm	423911	423931
11W LED	4000 K	1065 lm	423912	423932
11W LED	6000 K	1087 lm	423914	423934

EMFA

MILET

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Cover
Die cast aluminium / Inox (Stainless steel)
Paint
Black or grey electrostatic powder
Body
Die cast aluminium
Recessing Box
Polycarbonate
Glands
1 X PG 9
Gaskets
Silicone
Diffusers
4 mm Tempered Glass






Symmetrical Inox








Power	Lampholder	Code No Round	Square
Led Lamp	G9	308121	306121
Led Lamp	Gu10	308131	306131

Symmetrical Aluminium








Power	Lampholder	Code No Round	Square
Led Lamp	G9	304121	302121
Led Lamp	Gu10	304131	302131

Asymmetrical Inox








Power	Lampholder	Code No Round	Square
Led Lamp	G9	307121	305121
Led Lamp	Gu10	307131	305131

Asymmetrical Aluminium







Power	Lampholder	Code No Round	Square
Led Lamp	G9	303121	301121
Led Lamp	Gu10	303131	301131

BELKIS MINI

WALL RECESSED FIXTURES
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Cover
316L Stainless steel or Aluminium
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel


Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 4mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red



Symmetrical






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	309001
1W LED	3000 K	95 lm	10°,25°,40°	309002
1W LED	4000 K	97 lm	10°,25°,40°	309003
1W LED	6000 K	99 lm	10°,25°,40°	309004
3W LED	2700 K	285 lm	10°,25°,40°	309011
3W LED	3000 K	285 lm	10°,25°,40°	309012
3W LED	4000 K	290 lm	10°,25°,40°	309013
3W LED	6000 K	296 lm	10°,25°,40°	309014

Symmetrical Deep







Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	309101
1W LED	3000 K	95 lm	10°,25°,40°	309102
1W LED	4000 K	97 lm	10°,25°,40°	309103
1W LED	6000 K	99 lm	10°,25°,40°	309104
3W LED	2700 K	285 lm	10°,25°,40°	309111
3W LED	3000 K	285 lm	10°,25°,40°	309112
3W LED	4000 K	290 lm	10°,25°,40°	309113
3W LED	6000 K	296 lm	10°,25°,40°	309114

Asymmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	Asymmetrical	309201
1W LED	3000 K	95 lm	Asymmetrical	309202
1W LED	4000 K	97 lm	Asymmetrical	309203
1W LED	6000 K	99 lm	Asymmetrical	309204
3W LED	2700 K	285 lm	Asymmetrical	309211
3W LED	3000 K	285 lm	Asymmetrical	309212
3W LED	4000 K	290 lm	Asymmetrical	309213
3W LED	6000 K	296 lm	Asymmetrical	309214



Honeycomb
Code No: 953714

EMFA

BELKIS 1 LL

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors



Body
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Tempered Glass
Gaskets
Silicone








Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4 mm Tempered Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

LLA Asymmetrical






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424103
3W	3000 K	285 lm	424101
3W	4000 K	290 lm	424102
3W	6000 K	296 lm	424104

LLS Asymmetrical Milky Glass







Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424113
3W	3000 K	285 lm	424111
3W	4000 K	290 lm	424112
3W	6000 K	296 lm	424114

LLS Symmetrical Anti-Glare Glass






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424123
3W	3000 K	285 lm	424121
3W	4000 K	290 lm	424122
3W	6000 K	296 lm	424124

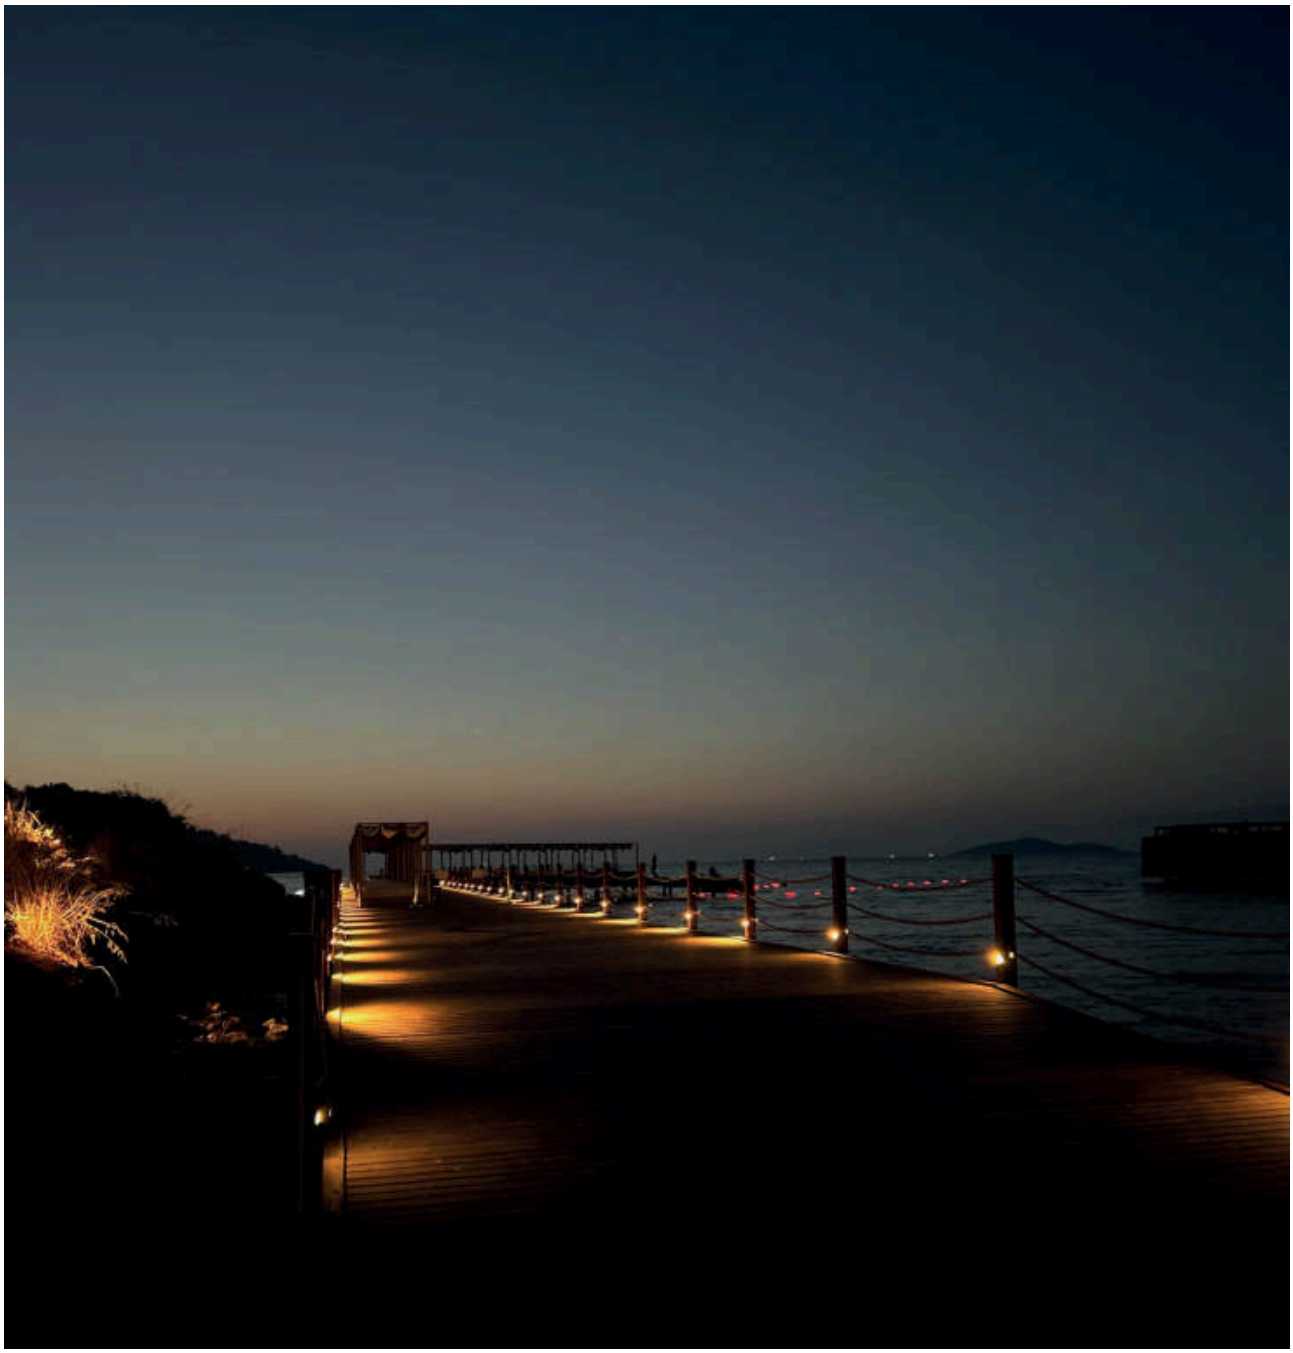

SATURN


WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors



Body
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Tempered Glass
Gaskets
Silicone



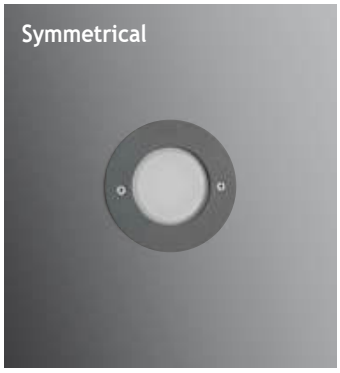




Led : COB LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4 mm Tempered Clear Glass or Frosted Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527003
3W	3000 K	285 lm	527001
3W	4000 K	290 lm	527002
3W	6000 K	296 lm	527004

Symmetrical Milky Glass







Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527103
3W	3000 K	285 lm	527101
3W	4000 K	290 lm	527102
3W	6000 K	296 lm	527104

Symmetrical Diffuse Glass





Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527203
3W	3000 K	285 lm	527201
3W	4000 K	290 lm	527202
3W	6000 K	296 lm	527204

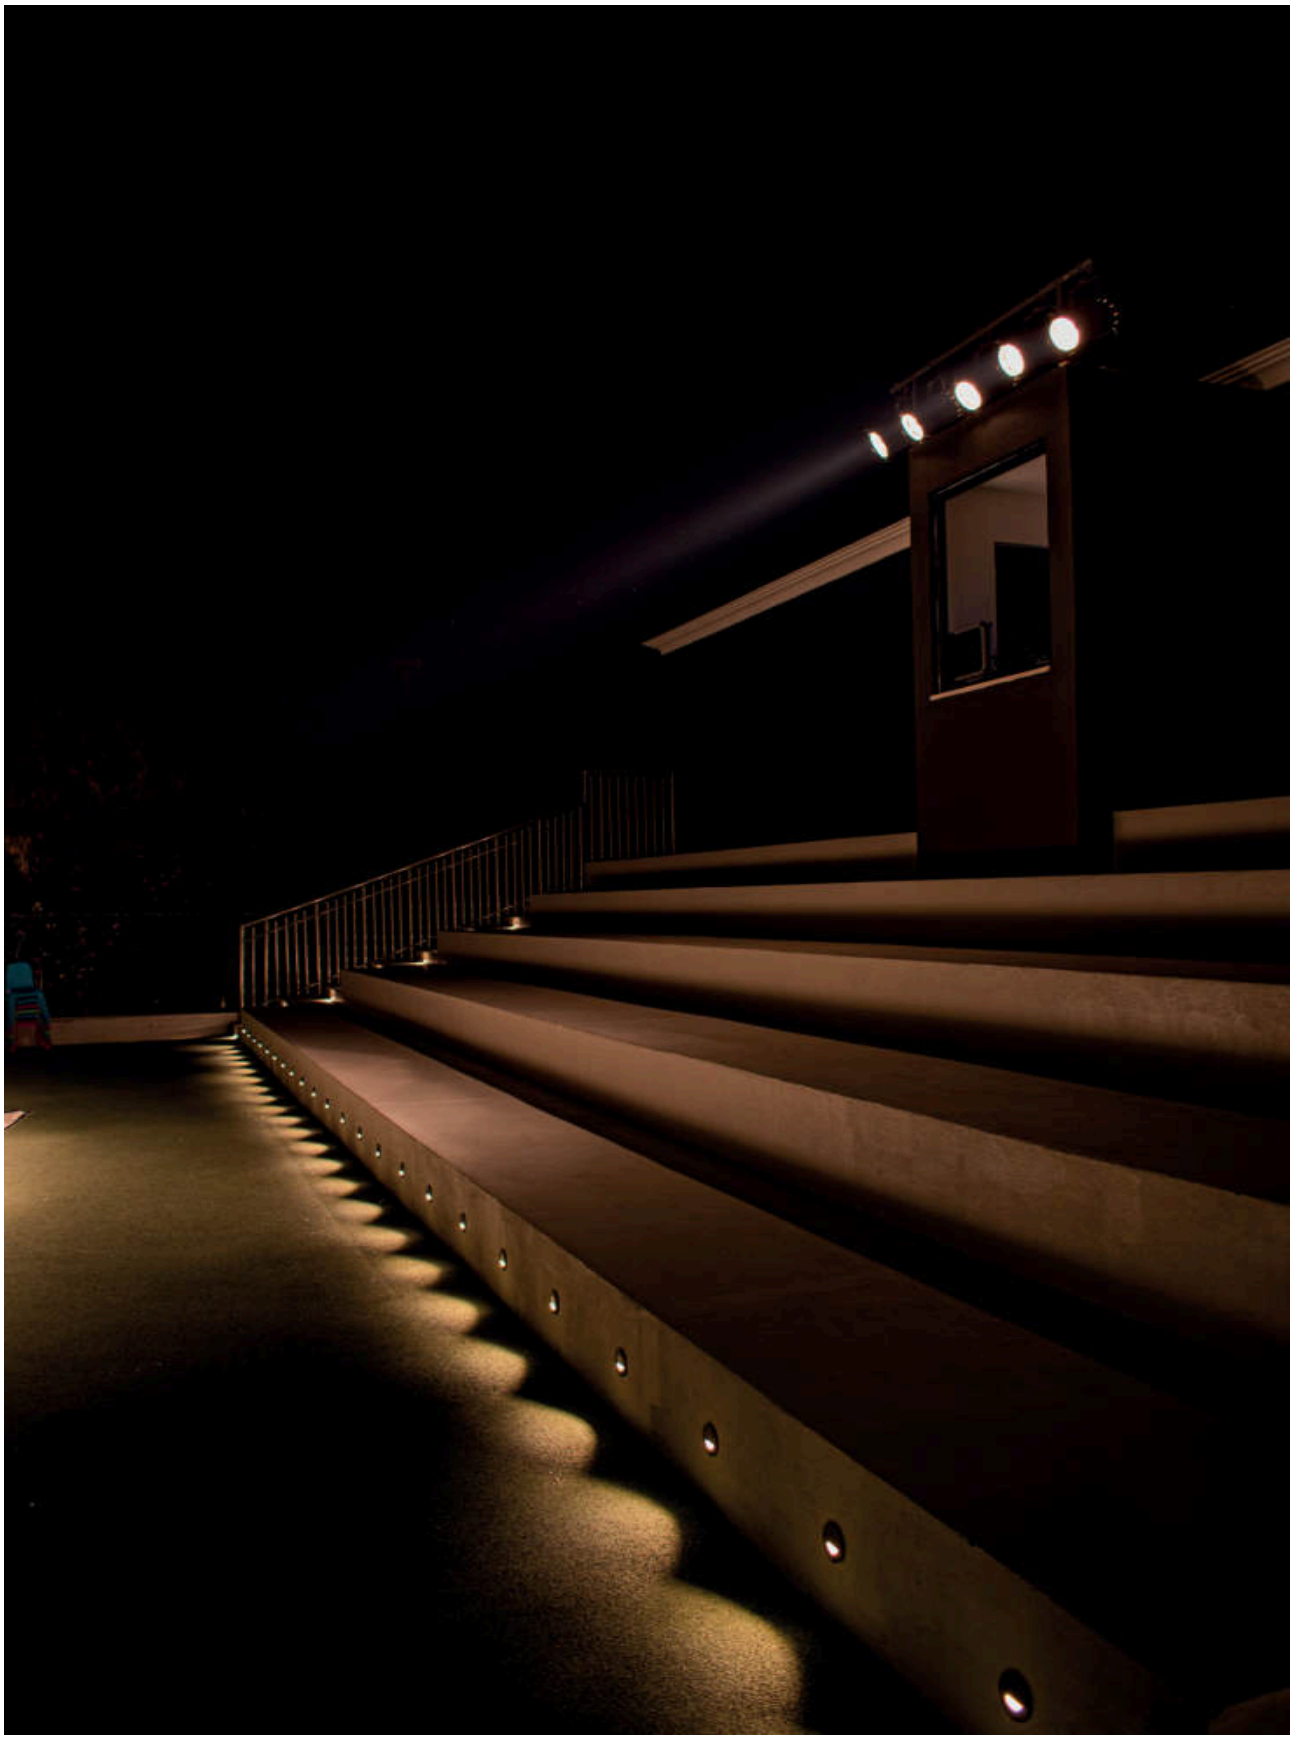

BERGAMA

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Steel or Inox (Stainless Steel)
Paint
Electrostatic powder
Reflector
Anodized aluminium
Recessing Box
Galvanized steel
(only for in wall series)
Diffuser
4 mm Clear Glass








Led : Linear LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 4 mm Tempered Clear Glass or Frosted Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

140x70






Power	Kelvin	Real Lumen Output	Code No Steel	Code No Inox
1W	2700 K	95 lm	349002	349012
1W	3000 K	95 lm	349001	349011
1W	4000 K	97 lm	349003	349013
1W	6000 K	99 lm	349004	349014

70x140





Power	Kelvin	Real Lumen Output	Code No Steel	Code No Inox
3W	2700 K	285 lm	349101	349111
3W	3000 K	285 lm	349102	349112
3W	4000 K	290 lm	349103	349113
3W	6000 K	296 lm	349104	349114

PYRAMID

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Cover & Body
Glass reinforced polyester
Screws
Inox
Gasket
Silicone
Glass
Tempered
Recessing Box
Galvanized steel






Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Symmetrical






Power	Kelvin	Lampholder	Code No
6W	2700 K	LED	502001
6W	3000 K	LED	502002
6W	4000 K	LED	502003
6W	6000 K	LED	502004

Asymmetrical





Power	Kelvin	Lampholder	Code No
6W	2700 K	LED	501001
6W	3000 K	LED	501002
6W	4000 K	LED	501003
6W	6000 K	LED	501004

EMFA

SLIM PYRAMID

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Cover & Body
Glass reinforced polyester
Screws
Inox
Gasket
Silicone
Glass
Tempered
Recessing Box
Galvanized steel






Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Symmetrical






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	503001
9W	3000 K	LED	503002
9W	4000 K	LED	503003
9W	6000 K	LED	503004

Asymmetrical






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	503101
9W	3000 K	LED	503102
9W	4000 K	LED	503103
9W	6000 K	LED	503104

Asymmetrical Grill





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	503201
9W	3000 K	LED	503202
9W	4000 K	LED	503203
9W	6000 K	LED	503204

SIDE WALL RECESSED FIXTURES IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate






Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Side 4






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	510001
9W	3000 K	LED	510002
9W	4000 K	LED	510003
9W	6000 K	LED	510004
Led Lamp		E27	510201

Side 5






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	511001
9W	3000 K	LED	511002
9W	4000 K	LED	511003
9W	6000 K	LED	511004
Led Lamp		E27	511201

Side 6





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	512001
9W	3000 K	LED	512002
9W	4000 K	LED	512003
9W	6000 K	LED	512004
Led Lamp		E27	512201

PERGE

WALL RECESSED FIXTURES
IP65 IK08

Available in any of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate






Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Perge 4






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	520001
9W	3000 K	LED	520002
9W	4000 K	LED	520003
9W	6000 K	LED	520004
Led Lamp		E27	520201

Perge 5






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	521001
9W	3000 K	LED	521002
9W	4000 K	LED	521003
9W	6000 K	LED	521004
Led Lamp		E27	521201

Perge 6





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	522001
9W	3000 K	LED	522002
9W	4000 K	LED	522003
9W	6000 K	LED	522004
Led Lamp		E27	522201



Surface Mounted

KNIDOS


SURFACE MOUNTED FIXTURES
IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Cover
316L Stainless steel
Outer Body
316L Stainless steel
Inner Body
Glass reinforced polyester
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless Steel



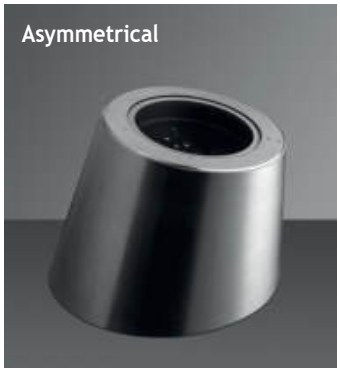


Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red



Symmetrical






Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	855 lm	10°,25°,40°	257244
18W	2700 K	1710 lm	10°,25°,40°	257251
9W	3000 K	855 lm	10°,25°,40°	257241
18W	3000 K	1710 lm	10°,25°,40°	257252
9W	4000 K	891 lm	10°,25°,40°	257242
18W	4000 K	1782 lm	10°,25°,40°	257253
9W	6000 K	898 lm	10°,25°,40°	257243
18W	6000 K	1795 lm	10°,25°,40°	257254
35W METAL HALIDE		Gx8,5	10°,40°	257211
70W METAL HALIDE		Gx8,5	10°,40°	257231

Asymmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
9W	2700 K	855 lm	10°,25°,40°	256304
18W	2700 K	1710 lm	10°,25°,40°	256331
9W	3000 K	855 lm	10°,25°,40°	256301
18W	3000 K	1710 lm	10°,25°,40°	256332
9W	4000 K	891 lm	10°,25°,40°	256302
18W	4000 K	1782 lm	10°,25°,40°	256333
9W	6000 K	898 lm	10°,25°,40°	256303
18W	6000 K	1795 lm	10°,25°,40°	256334
35W METAL HALIDE		Gx8,5	10°,40°	256311
70W METAL HALIDE		Gx8,5	10°,40°	256321

NEPTUN 3

SURFACE MOUNTED FIXTURES
IP65 IK10

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015


The Neptun Surface Mounted Uplighter is made of die cast aluminium painted with electrostatic powder paint and fixed with 316L stainless steel screws. The fixture can be mounted without harm to any surface and therefore is ideal for protected and historical sites where mounting recessed fixtures is not permitted.



Body
Die cast aluminium
Diffusers
4 mm Tempered Glass
Paint
Electrostatic powder
Gaskets
Silicone
Screws
316L Stainless steel

Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F



Cable exits from bottom


Cable exits from side


Single color LED options upon request are ;
Blue Amber Green Red

Asymmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	259005
6W LED	3000 K	570 lm	10°,25°,40°	259001
6W LED	4000 K	580 lm	10°,25°,40°	259002
6W LED	6000 K	592 lm	10°,25°,40°	259003
18W LED	RGB		25°,40°	259004


Honeycomb
Code No: 953523

EMFA

BELKIS 5

SURFACE MOUNTED FIXTURES
IP67 IK10

The Belkis Surface Mounted Uplighter, completely made of 316L stainless steel is ideal for areas where corrosive agents such as salt water or fertilizers would harm aluminium fixtures. The fixture can be mounted without harm to any surface and therefore is ideal for protected and historical sites where mounting recessed fixtures is not permitted.




Cover
316L Stainless steel
Outer Body
316L Stainless steel
Inner Body
Die cast aluminium
Diffusers
8 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless Steel


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)
Diffuser : 12 mm Clear Glass (Frosted Glass on request)
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
13W COB LED	2700 K	1235 lm	Asymmetrical	333004
13W COB LED	3000 K	1235 lm	Asymmetrical	333001
13W COB LED	4000 K	1259 lm	Asymmetrical	333002
13W COB LED	6000 K	1284 lm	Asymmetrical	333003



Honeycomb
Code No: 953525

TEOS SURFACE DRIVE OVER FIXTURES
Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Teos 3 Surface Drive Over LED Fixture is specially designed to deliver high output LED light to ground surfaces of roads, carparks and pathways. This heavy duty fixture is designed to withstand the weight of large vehicles. Its robust construction allows for a maximum static load of 5000kg. The body and head of the fixture are made of die cast aluminium to withstand the repeated impact of driving vehicles' tires. The high power LEDs are positioned and angled to provide maximum light output. The electronic LED driver is housed in the base of the fixture. The fixture comes with 2 x PG13.5 cable glands and 0.5m cable.

Cover
Die cast aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
Polycarbonate
Screws
316L Stainless steel
Glands
2 x PG 13.5
Cable
0.5m 3x0,75 mm H05VV-F












LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

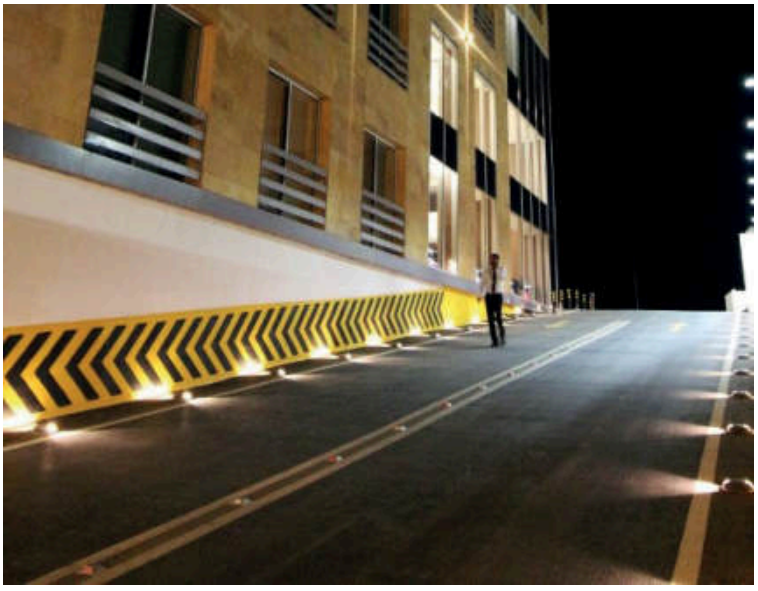

TEOS 3


SURFACE DRIVE OVER FIXTURES
Load 50 kN | Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015








Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Mono






Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	1x 380 lm	180203
1x 4W	3000 K	1x 380 lm	180201
1x 4W	4000 K	1x 380 lm	180202

Duo 1-way






Power	Kelvin	Real Lumen Output	Code No
2x 4W	2700 K	2x 380 lm	180213
2x 4W	3000 K	2x 380 lm	180211
2x 4W	4000 K	2x 380 lm	180212

Duo 2-way






Power	Kelvin	Real Lumen Output	Code No
2x 4W	2700 K	2x 380 lm	180223
2x 4W	3000 K	2x 380 lm	180221
2x 4W	4000 K	2x 380 lm	180222

Trio







Power	Kelvin	Real Lumen Output	Code No
3x 4W	2700 K	3x 380 lm	180233
3x 4W	3000 K	3x 380 lm	180231
3x 4W	4000 K	3x 380 lm	180232

Quad





Power	Kelvin	Real Lumen Output	Code No
4x 4W	2700 K	4x 380 lm	180243
4x 4W	3000 K	4x 380 lm	180241
4x 4W	4000 K	4x 380 lm	180242

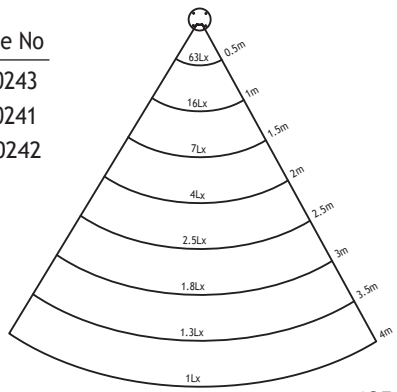

Lux levels for one aperture at 3000K

EMFA



MIRA

SURFACE MOUNTED FIXTURES
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Mira series consists of a range of LED, fluorescent and metal halide sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for wall mounting including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



Cover
316L Stainless steel
Body
Die cast aluminium
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless steel
Recessing Box
Stainless steel

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

MIRA

SURFACE MOUNTED FIXTURES
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 12 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

MIRA 1 Short Bracket






Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	430202
12W	3000 K	1140 lm	10°,25°,40°	430201
12W	4000 K	1160 lm	10°,25°,40°	430206
12W	6000 K	1185 lm	10°,25°,40°	430207
27W	RGB		25°,40°	430241

MIRA 1 Long Bracket






Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	430312
12W	3000 K	1140 lm	10°,25°,40°	430311
12W	4000 K	1160 lm	10°,25°,40°	430316
12W	6000 K	1185 lm	10°,25°,40°	430317
27W	RGB		25°,40°	430341

MIRA 2 Short Bracket






Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	430802
36W	3000 K	3420 lm	10°,25°,40°	430801
36W	4000 K	3488 lm	10°,25°,40°	430806
36W	6000 K	3557 lm	10°,25°,40°	430807
81W	RGB		25°,40°	430821
70W	METAL HALIDE G12			430841

MIRA 2 Long Bracket





Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	430902
36W	3000 K	3420 lm	10°,25°,40°	430901
36W	4000 K	3488 lm	10°,25°,40°	430906
36W	6000 K	3557 lm	10°,25°,40°	430907
81W	RGB		25°,40°	430921
70W	METAL HALIDE G12			430941

EMFA

KARIA

SURFACE MOUNTED FIXTURES
Class I IP67 IK07

Available in these 2 colors

Grey Black

The Karia series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of an anodized extrusion aluminium body with polyamide side covers. Polyamide brackets are used to mount the fixtures. Stainless steel brackets are also available to increase the distance from the mounting surface if necessary. The fixtures come with integrated electronic ballasts. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



Body
Anodized Aluminium profile with polyamide 66 side covers
Mounting Brackets
Polyamide 66 (Stainless Steel on request)
Screws
Stainless steel
Diffusers
4 mm Tempered Glass
Gaskets
Silicone
Gland
2 cable Gland for 5-8 mm Ø cable

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

KARIA

SURFACE MOUNTED FIXTURES
Class I IP67 IK07

Available in these 2 colors

Grey Black




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Karia 1 400mm




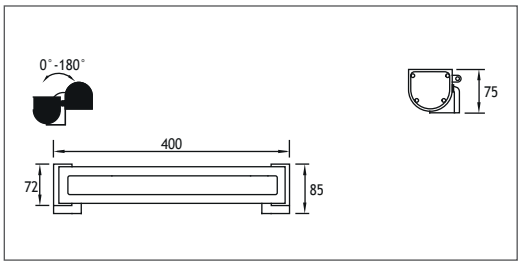

Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	431102
12W	3000 K	1140 lm	10°,25°,40°	431101
12W	4000 K	1162 lm	10°,25°,40°	431106
12W	6000 K	1186 lm	10°,25°,40°	431107
27W	RGB		25°,40°	431601

Karia 2 750mm




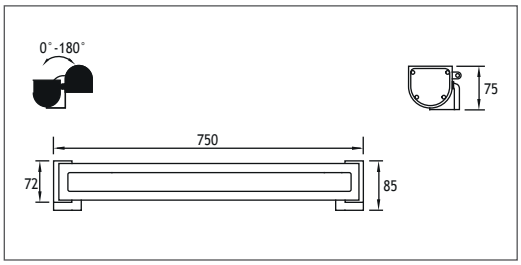

Power	Kelvin	Real Lumen Output	Lens	Code No
24W	2700 K	2280 lm	10°,25°,40°	431202
24W	3000 K	2280 lm	10°,25°,40°	431211
24W	4000 K	2325 lm	10°,25°,40°	431216
24W	6000 K	2372 lm	10°,25°,40°	431217

Karia 3 1050mm



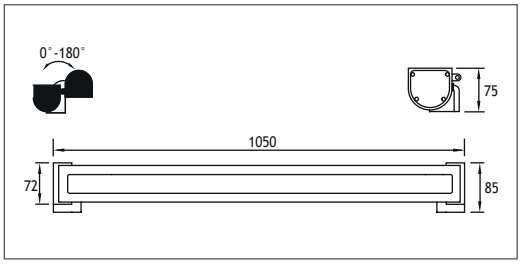

Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	431244
36W	3000 K	3420 lm	10°,25°,40°	431241
36W	4000 K	3488 lm	10°,25°,40°	431242
36W	6000 K	3558 lm	10°,25°,40°	431243
81W	RGB		25°,40°	431251

EMFA

SANTA

SURFACE MOUNTED FIXTURES
Class I IP65 IK08

Available in these 2 colors

Grey Black

The Santa series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of an anodized extrusion aluminium body with polyamide side covers. Polyamide brackets are used to mount the fixtures. Stainless steel brackets are also available to increase the distance from the mounting surface if necessary. The fixtures come with integrated electronic ballasts. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



Body
Anodized Aluminium profile with polyamide 66 side covers
Mounting Brackets
Stainless Steel on request
Screws
Stainless steel
Diffusers
Acrylic Diffuser
Gaskets
Silicone
Gland
2 cable Gland for 5-8 mm Ø cable

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

SANTA

SURFACE MOUNTED FIXTURES
Class I IP65 IK08

Available in these 2 colors

Grey Black




Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Santa 1 320mm




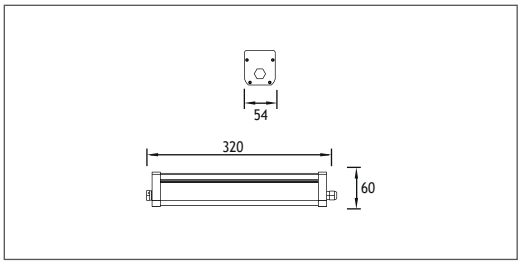

Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°,25°,40°	444001
12W	3000 K	1140 lm	10°,25°,40°	444002
12W	4000 K	1162 lm	10°,25°,40°	444003
12W	6000 K	1186 lm	10°,25°,40°	444004

Santa 2 620mm




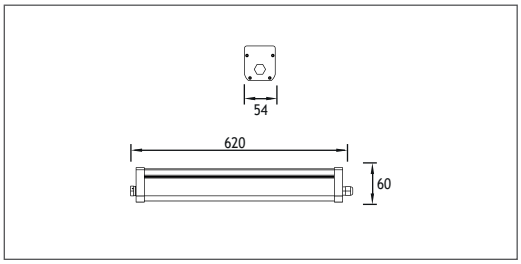

Power	Kelvin	Real Lumen Output	Lens	Code No
24W	2700 K	2280 lm	10°,25°,40°	444101
24W	3000 K	2280 lm	10°,25°,40°	444102
24W	4000 K	2325 lm	10°,25°,40°	444103
24W	6000 K	2372 lm	10°,25°,40°	444104

Santa 3 940mm




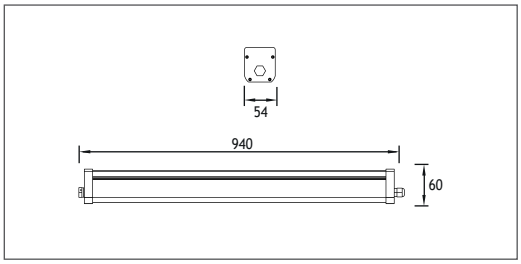

Power	Kelvin	Real Lumen Output	Lens	Code No
36W	2700 K	3420 lm	10°,25°,40°	444201
36W	3000 K	3420 lm	10°,25°,40°	444202
36W	4000 K	3488 lm	10°,25°,40°	444203
36W	6000 K	3558 lm	10°,25°,40°	444204

Santa 4 1200mm



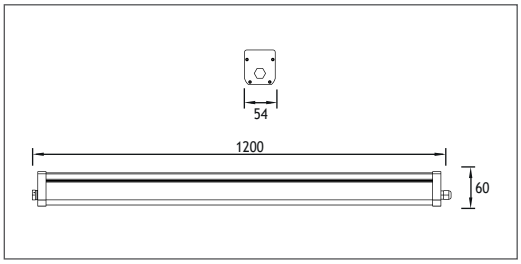

Power	Kelvin	Real Lumen Output	Lens	Code No
48W	2700 K	4560 lm	10°,25°,40°	444301
48W	3000 K	4560 lm	10°,25°,40°	444302
48W	4000 K	4670 lm	10°,25°,40°	444303
48W	6000 K	4780 lm	10°,25°,40°	444304

EMFA

SLIM PYRAMID

WALL SURFACE FIXTURES
IP65 IK08


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Cover & Body
Glass reinforced polyester
Screws
Inox
Gasket
Silicone
Glass
Tempered
Recessing Box
Galvanized steel




Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Asymmetrical





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	503603
9W	3000 K	LED	503601
9W	4000 K	LED	503602
9W	6000 K	LED	503604

SIDE WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate






Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Side 1






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	505211
9W	3000 K	LED	505212
9W	4000 K	LED	505213
9W	6000 K	LED	505214
Led Lamp		E27	505201

Side 2






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	507211
9W	3000 K	LED	507212
9W	4000 K	LED	507213
9W	6000 K	LED	507214
Led Lamp		E27	507201

Side 3





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	506211
9W	3000 K	LED	506212
9W	4000 K	LED	506213
9W	6000 K	LED	506214
Led Lamp		E27	506201

EMFA

PERGE

WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate






Voltage : 240 VAC with integrated driver (24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F



Perge 1






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	515211
9W	3000 K	LED	515212
9W	4000 K	LED	515213
9W	6000 K	LED	515214
Led Lamp		E27	515201

Perge 2






Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	517211
9W	3000 K	LED	517212
9W	4000 K	LED	517213
9W	6000 K	LED	517214
Led Lamp		E27	517201

Perge 3





Power	Kelvin	Lampholder	Code No
9W	2700 K	LED	516211
9W	3000 K	LED	516212
9W	4000 K	LED	516213
9W	6000 K	LED	516214
Led Lamp		E27	516201

MILET


WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors



Cover
Die cast aluminium / Inox (Stainless steel)
Paint
Black or grey electrostatic powder
Body
Die cast aluminium
Connection
Sealed crimp splices
Gaskets
Silicone
Diffusers
4 mm Tempered Glass




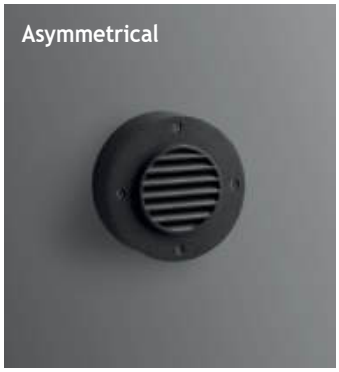

The Milet Surface Mounted Series is specially designed to deliver low glare lighting to steps, open areas, corridors and pathways. The fixture has a die cast aluminium body painted with electrostatic powder paint. The slated or open covers come in an aluminium or aluminium / stainless steel finish. The cable on site can be securely connected to the fixture via a sealed crimp splice.

Symmetrical






Power	Lampholder	Code No Alum.	Inox
Led Lamp	G 9	312111	314111

Asymmetrical





Power	Lampholder	Code No Alum.	Inox
Led Lamp	G 9	310111	311111



EMFA

MILET

INDIRECT SURFACE MOUNTED FIXTURE
Class I IP55 IK08


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Milet Indirect series consists of an on-wall fixture and a bollard using LED, LED lamp or fluorescent. The fixtures are made of a combination of a die cast aluminium head and an aluminium pipe painted with electrostatic powder paint. The wall fixture allows for a custom made sign showing room numbers or names. For the LED versions, a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. For the LED lamp and fluorescent versions, an IP connection box is provided to allow for a secure connection of the on-site cable.




Cover
Die cast aluminium
Paint
Black or grey electrostatic powder
Body
Die cast aluminium
Connection
IP connection box
Gaskets
Silicone
Diffusers
Polycarbonate





Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Diffuser : Polycarbonate
Cable : Potted 1 m 3x1 H03 VV-F





Power	Kelvin	Lampholder	Code No
11W	2700 K	LED	290102
11W	3000 K	LED	290101
11W	4000 K	LED	290103
11W	6000 K	LED	290104
Led Lamp		G 9	290201





Special Application

For room numbers, names, signs etc. The acrylic part inside can be color of choice.

CODE NO 295115
ELECTR. CIR. FLUO. 6W

SQUARE MINI

LED APPLIQUES
LED DRIVER IN HEAD
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Gaskets
Silicone
Diffusers
Tempered Glass





"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

POWER LED (COB LED options available)


Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	298004
1W LED	3000 K	95 lm	10°,25°,40°	298001
1W LED	4000 K	97 lm	10°,25°,40°	298002
1W LED	6000 K	99 lm	10°,25°,40°	298003
3W LED	2700 K	285 lm	10°,25°,40°	298014
3W LED	3000 K	285 lm	10°,25°,40°	298011
3W LED	4000 K	290 lm	10°,25°,40°	298012
3W LED	6000 K	296 lm	10°,25°,40°	298013





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	298024
6W LED	3000 K	570 lm	10°,25°,40°	298021
6W LED	4000 K	585 lm	10°,25°,40°	298022
6W LED	6000 K	592 lm	10°,25°,40°	298023



Honeycomb
Code No: 953541

EMFA

BELKIS 1 LL

WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors



Body
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Tempered Glass 4 mm
Gaskets
Silicone






The Belkis 1 LLS is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 4 tones of white: 2700K, 3000K, 4000K, 6000K.



Led : Linear LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 4 mm Tempered Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424143
3W	3000 K	285 lm	424141
3W	4000 K	290 lm	424142
3W	6000 K	296 lm	424144

Symmetrical







Power	Kelvin	Real Lumen Output	Code No Milky Glass	Code No Clear Glass
3W	2700 K	285 lm	424153	424163
3W	3000 K	285 lm	424151	424161
3W	4000 K	290 lm	424152	424162
3W	6000 K	296 lm	424154	424164



SATURN LL

WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors



Body
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Tempered Glass 4 mm
Gaskets
Silicone






The Saturn LLS is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 4 tones of white: 2700K, 3000K, 4000K, 6000K.



Led : COB LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 4 mm Tempered Glass, Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	526003
3W	3000 K	285 lm	526001
3W	4000 K	290 lm	526002
3W	6000 K	296 lm	526004


Symmetrical







Power	Kelvin	Real Lumen Output	Code No Milky Glass	Code No Clear Glass
3W	2700 K	285 lm	526203	526103
3W	3000 K	285 lm	526201	526101
3W	4000 K	290 lm	526202	526102
3W	6000 K	296 lm	526204	526104

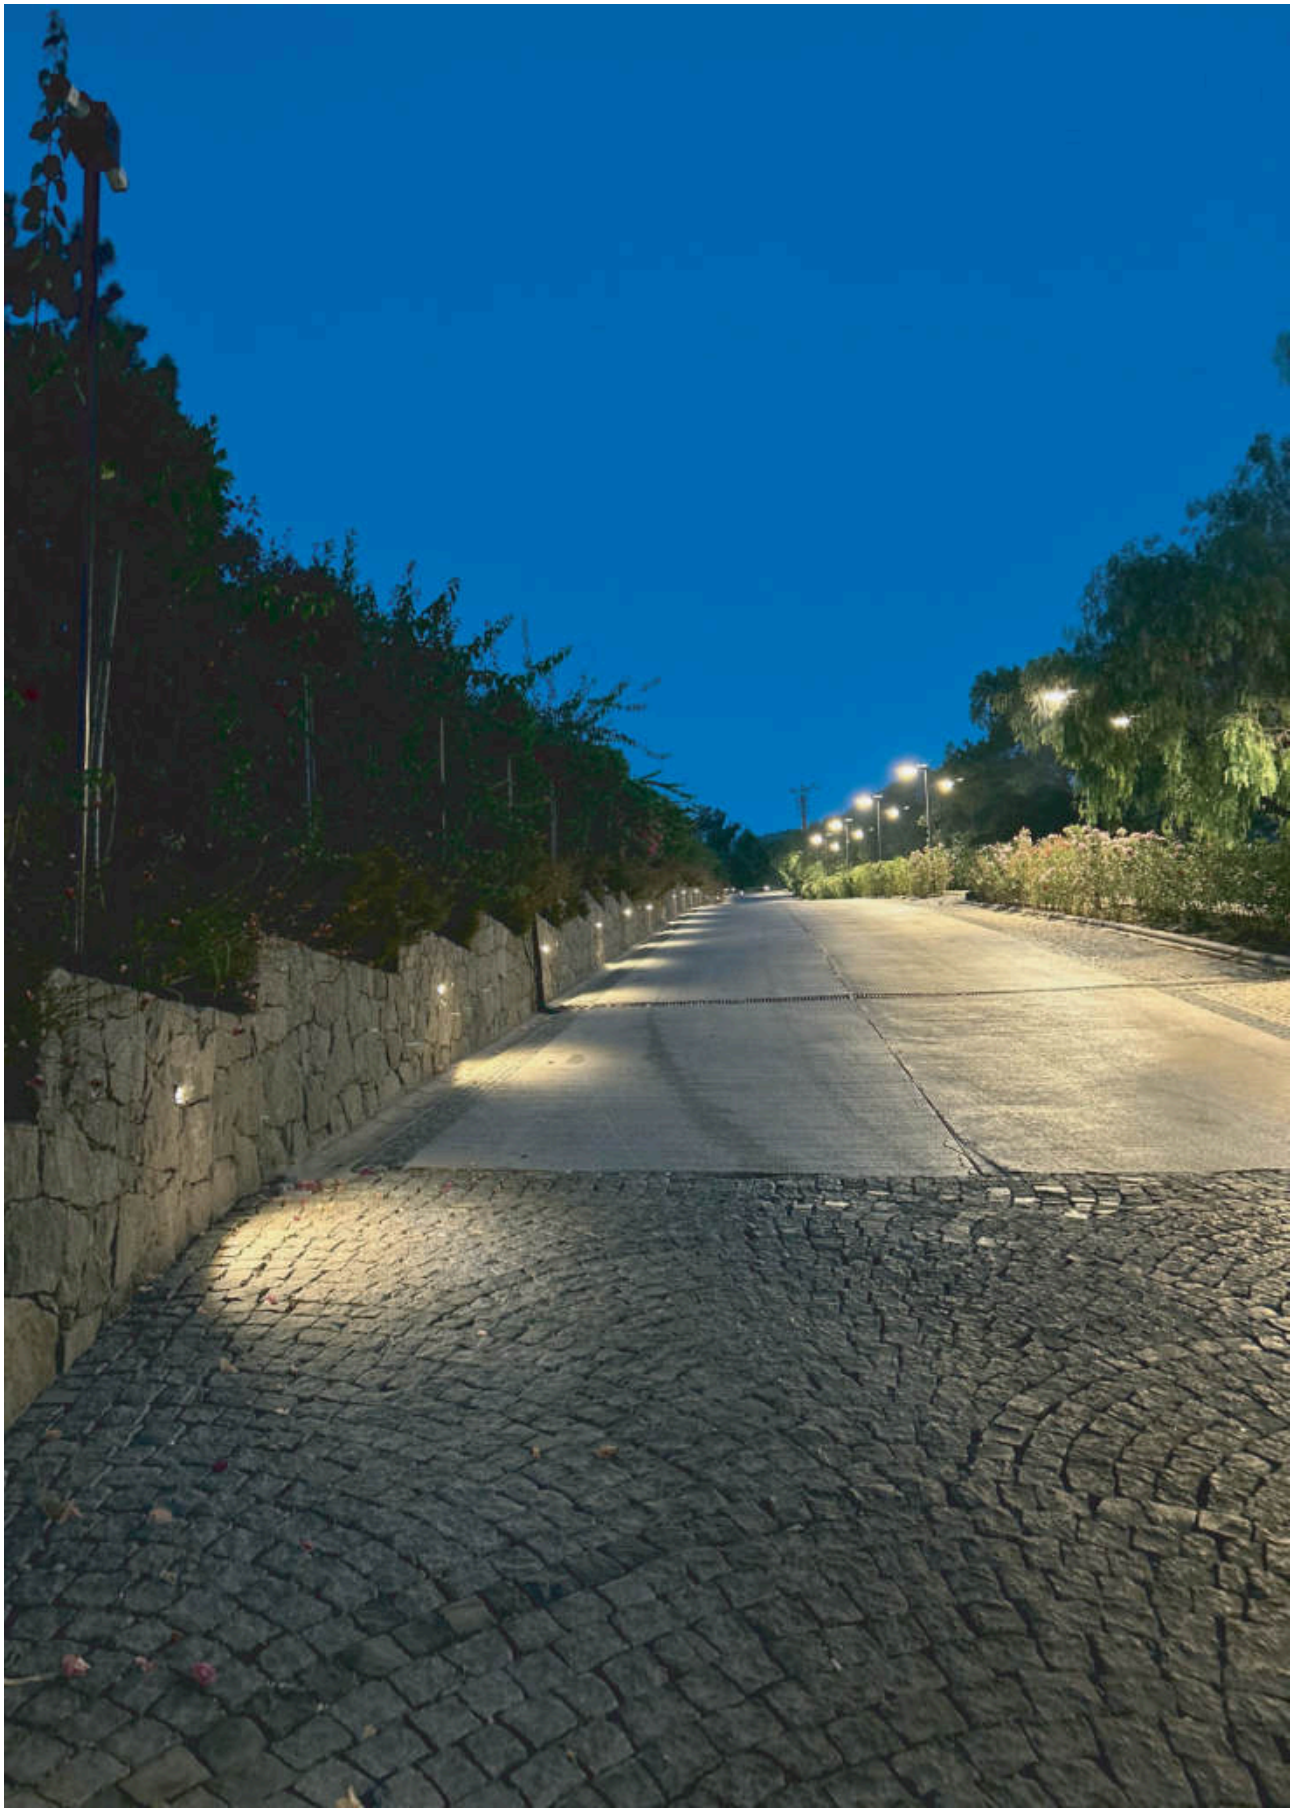

LYKIA LL


WALL SURFACE FIXTURES
IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Tempered Glass 4 mm
Gaskets
Silicone








The LYKIA LL is specially designed to deliver low glare LED lighting to steps, open areas, corridors and pathways where recessing the fixture is not possible. The fixture has a die cast aluminium body painted with electrostatic powder paint. The narrow depth of 39mm, which also includes the LED driver, allows the fixture to be installed in any wall. A plastic recessing box is included for installation into concrete. A specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The linear LED used comes in 4 tones of white: 2700K, 3000K, 4000K, 6000K.


Led : Linear LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 4 mm Tempered Glass Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Asymmetrical





Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424202
3W	3000 K	285 lm	424201
3W	4000 K	290 lm	424203
3W	6000 K	296 lm	424204

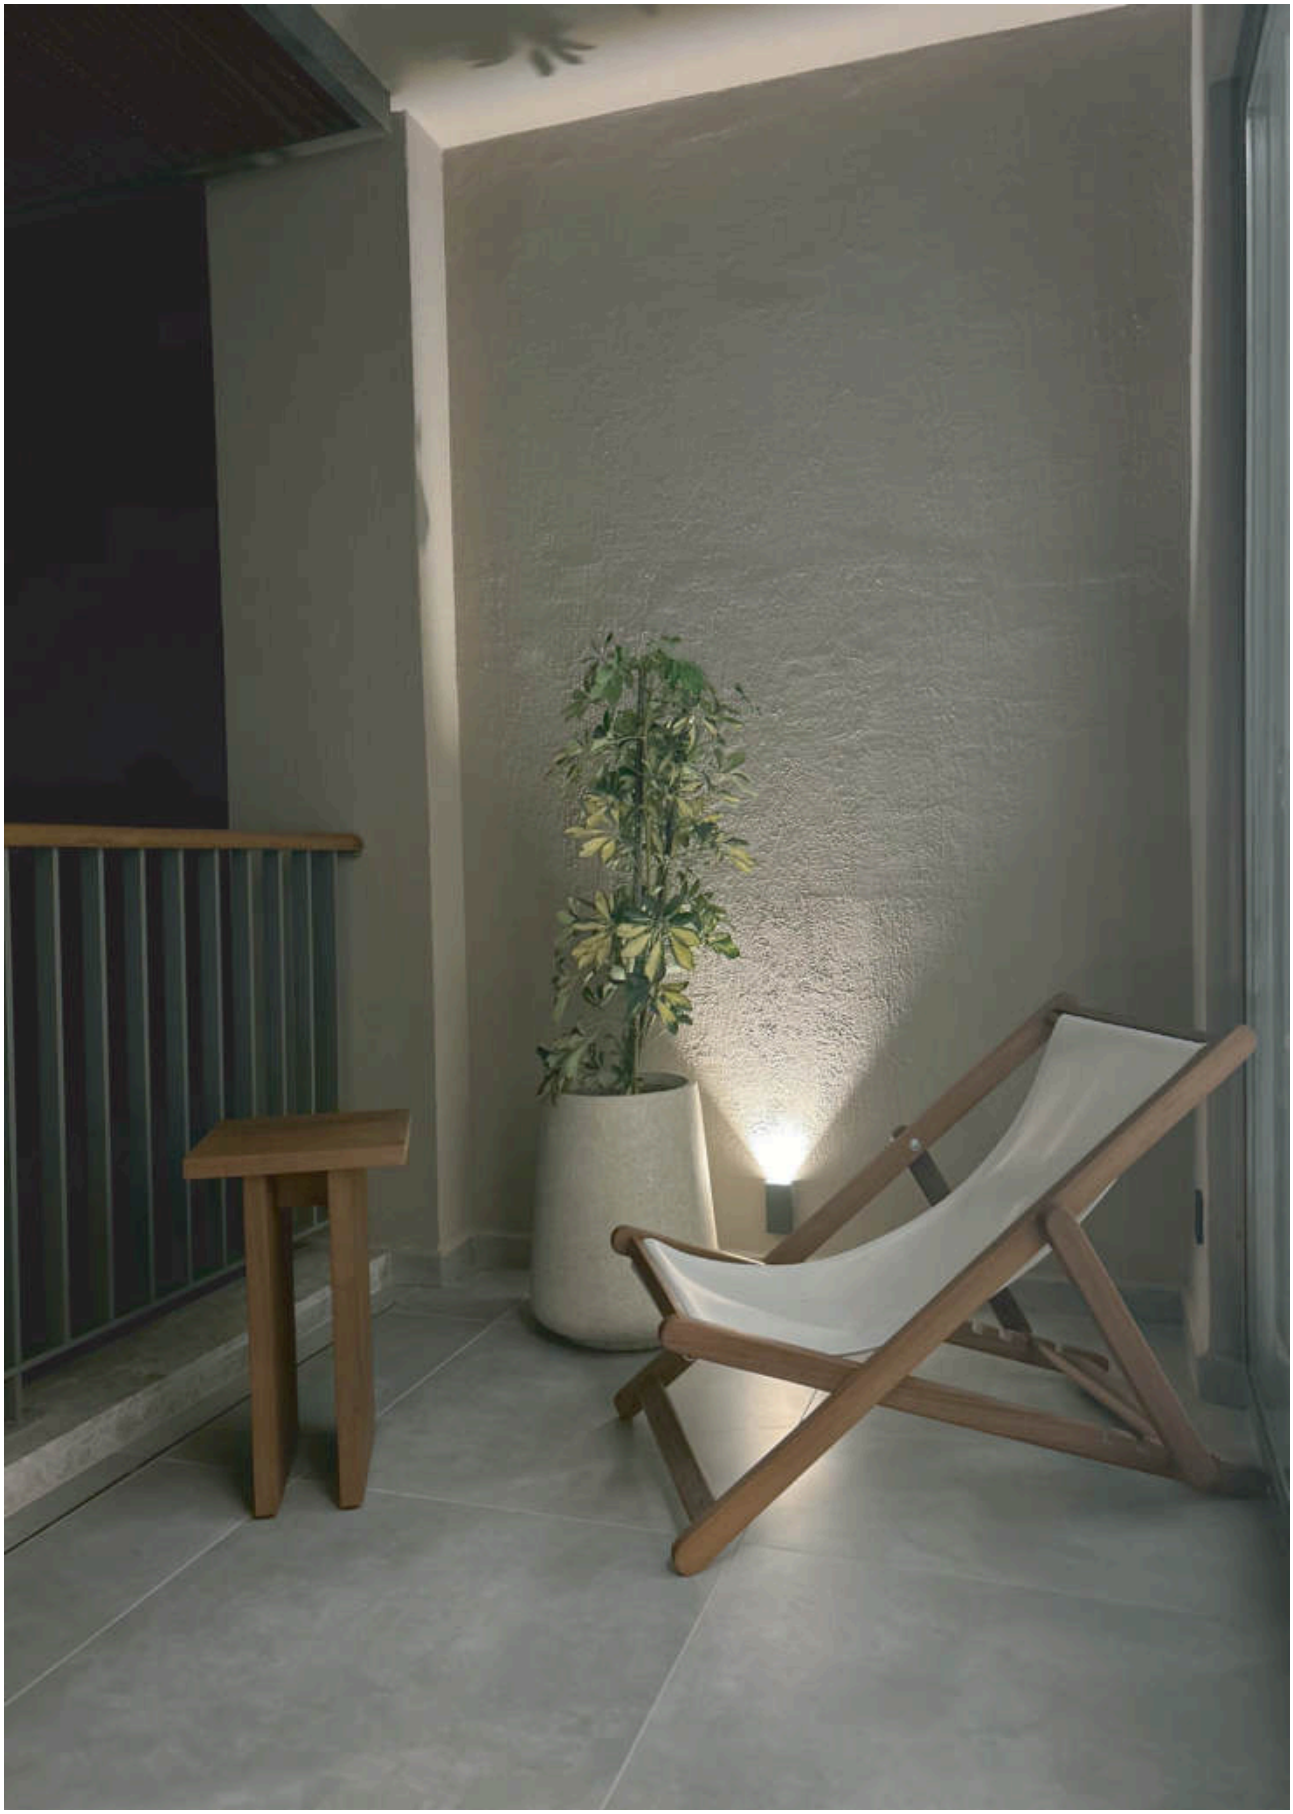



EMFA


MILET ANI

WALL SURFACE
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Ani surface mounted series is specially designed to deliver low-glare lighting to facades, walkways, pathways and driveways with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LEDs. The Linear LEDs with special lenses give excellent wallwashing effect. An anti-slip glass is available upon request.

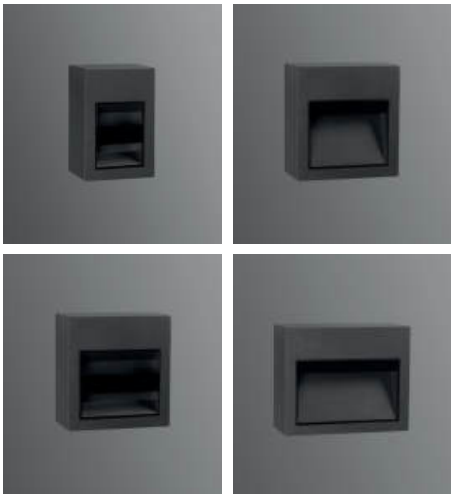


Cover
316L Stainless steel or Aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
4 mm Tempered Glass
Screws
316L Stainless Steel
Glands
PG 11

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.


Symmetrical









Asymmetrical

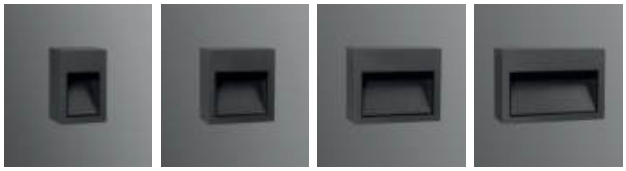








Galvanized Surface Box




end of the code number "s" add for Screw mounting option for

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Asym. Glass




Trenched Glass



Milky Glass



Clear Glass



EMFA

MILET ANI

WALL SURFACE FIXED
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	457003	457503
6W	3000 K	570 lm	457001	457501
6W	4000 K	581 lm	457002	457502
12W	2700 K	1140 lm	457013	457513
12W	3000 K	1140 lm	457011	457511
12W	4000 K	1195 lm	457012	457512

ANI 2








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	457103	457603
6W	3000 K	570 lm	457101	457601
6W	4000 K	581 lm	457102	457602
12W	2700 K	1140 lm	457113	457613
12W	3000 K	1140 lm	457111	457611
12W	4000 K	1195 lm	457112	457612

ANI 3








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	457203	457703
12W	3000 K	1140 lm	457201	457701
12W	4000 K	1195 lm	457202	457702
24W	2700 K	2280 lm	457213	457713
24W	3000 K	2280 lm	457211	457711
24W	4000 K	2320 lm	457212	457712


ANI 4







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	457303	457803
24W	3000 K	2280 lm	457301	457801
24W	4000 K	2320 lm	457302	457802
36W	2700 K	3420 lm	457313	457813
36W	3000 K	3420 lm	457311	457811
36W	4000 K	3520 lm	457312	457812



Galvanized Recessing Box

EMFA

MILET ANI

WALL SURFACE ADJUSTABLE
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	454003	454503
6W	3000 K	570 lm	454001	454501
6W	4000 K	581 lm	454002	454502
12W	2700 K	1140 lm	454013	454513
12W	3000 K	1140 lm	454011	454511
12W	4000 K	1195 lm	454012	454512

ANI 2








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
6W	2700 K	570 lm	454103	454603
6W	3000 K	570 lm	454101	454601
6W	4000 K	581 lm	454102	454602
12W	2700 K	1140 lm	454113	454613
12W	3000 K	1140 lm	454111	454611
12W	4000 K	1195 lm	454112	454612

ANI 3








Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
12W	2700 K	1140 lm	454203	454703
12W	3000 K	1140 lm	454201	454701
12W	4000 K	1195 lm	454202	454702
24W	2700 K	2280 lm	454213	454713
24W	3000 K	2280 lm	454211	454711
24W	4000 K	2320 lm	454212	454712

ANI 4







Power	Kelvin	Real Lumen Output	Code No Symmetrical	Code No Asymmetrical
24W	2700 K	2280 lm	454303	454803
24W	3000 K	2280 lm	454301	454801
24W	4000 K	2320 lm	454302	454802
36W	2700 K	3420 lm	454313	454813
36W	3000 K	3420 lm	454311	454811
36W	4000 K	3520 lm	454312	454812

EMFA


TAROS 2

SURFACE LED FIXTURES
Class I IP55 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Mono






Power	Kelvin	Real Lumen Output	Code No
1x 4W	2700 K	380 lm	443001
1x 4W	3000 K	380 lm	443002
1x 4W	4000 K	392 lm	443003
1x 4W	6000 K	392 lm	443004



Dual





Power	Kelvin	Real Lumen Output	Code No
2x 4W	2700 K	380 lm	443101
2x 4W	3000 K	380 lm	443102
2x 4W	4000 K	392 lm	443103
2x 4W	6000 K	392 lm	443104


Trio

Power	Kelvin	Real Lumen Output	Code No
3x 4W	2700 K	380 lm	443201
3x 4W	3000 K	380 lm	443202
3x 4W	4000 K	392 lm	443203
3x 4W	6000 K	392 lm	443204

Quad





Power	Kelvin	Real Lumen Output	Code No
4x 4W	2700 K	380 lm	443301
4x 4W	3000 K	380 lm	443302
4x 4W	4000 K	392 lm	443303
4x 4W	6000 K	392 lm	443304

Selge Applique



EMFA

SELGE

ADJUSTABLE TWO WAY LED APPLIQUES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Selge Adjustable Applique series consists of a range of LED light sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired light effect.



Outer Body
Extruded aluminium
Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffuser
Tempered Glass or acrylic


"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

Adjustable



Led : Linear LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 3mm Tempered Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90





Power	Kelvin	Real Lumen Output	Code No
2x 3W	2700 K	2x 285 lm	108004
2x 3W	3000 K	2x 285 lm	108001
2x 3W	4000 K	2x 290 lm	108002
2x 3W	6000 K	2x 296 lm	108003

Silyon Wall Surface



EMFA

SILYON

LED SURFACE MOUNTED
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Silyon Surface Mount series consists of a range of LED light sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired light effect.





Body
Die cast aluminium
Paint
Electrostatic powder
Base
316L Stainless Steel
Diffuser
Tempered Glass or acrylic

Led : Power LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Polycarbonate
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red









Power	Kelvin	Real Lumen Output 1W	Real Lumen Output 3W	Code No 1W	Code No 3W
LED	2700 K	95 lm	285 lm	109011	109004
LED	3000 K	95 lm	285 lm	109012	109001
LED	4000 K	97 lm	290 lm	109013	109002
LED	6000 K	99 lm	296 lm	109014	109003







Power	Kelvin	Real Lumen Output 1W	Real Lumen Output 3W	Code No 1W	Code No 3W
LED	2700 K	95 lm	285 lm	109111	109104
LED	3000 K	95 lm	285 lm	109112	109101
LED	4000 K	97 lm	290 lm	109113	109102
LED	6000 K	99 lm	296 lm	109114	109103

LEON

LED WALL MOUNTED
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Leon, wall mounted. A die-cast aluminium head on an extruded aluminium stem, 250 mm off the wall. The LED faces the wall. The light returns to the surface behind the head and spreads as a soft halo; the source stays out of view. Available in 6W or 12W, 2700K to 6000K, CRI >80. Electrostatic powder paint, any of six RAL colours.






Head
Die cast aluminium
Diffusers
Frosted polyamide 6.6
Pipe
Extrusion aluminium
Paint
Electrostatic powder

Led	: Circular LEDs (6W or 12W)
Voltage	: 240 VAC with integrated driver (12-24 VDC on request)
Diffuser	: Polyamide
CRI	: >80
Cable	: Potted 1m 3x1 H03 VV-F







Power	Kelvin	Real Lumen Output 6W	Real Lumen Output 12W	Code No 6W	Code No 12W
LED	2700 K	570 lm	1140 lm	179001	179011
LED	3000 K	570 lm	1140 lm	179002	179012
LED	4000 K	582 lm	1162 lm	179003	179013
LED	6000 K	591 lm	1185 lm	179004	179014

EMFA



Ceramus Mini Applique

Ø43mm



CERAMUS MINI

LED APPLIQUES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffuser
Tempered Glass or acrylic
Gaskets
Silicone









POWER LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
Lens : 10°, 20° or 30°
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red





One - Way







Kelvin	Real Lumen Output 1W	3W	Lens	Code No 1W	3W
2700 K	95 lm	285 lm	10°,20°,30°	463004	463014
3000 K	95 lm	285 lm	10°,20°,30°	463001	463011
4000 K	97 lm	290 lm	10°,20°,30°	463002	463012
6000 K	99 lm	296 lm	10°,20°,30°	463003	463013

Two - Way





Kelvin	Real Lumen Output 1W	3W	Lens	Code No 1W	3W
2700 K	95 lm	285 lm	10°,20°,30°	463104	463114
3000 K	95 lm	285 lm	10°,20°,30°	463101	463111
4000 K	97 lm	290 lm	10°,20°,30°	463102	463112
6000 K	99 lm	296 lm	10°,20°,30°	463103	463113



Honeycomb
Code No: 953511

Ceramus 2 Applique

Ø80mm



CERAMUS 2

LED APPLIQUES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffuser
Tempered Glass or acrylic
Gaskets
Silicone









COB LED


Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
Lens : 10°, 20° or 30°
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F





One - Way







Kelvin	Real Lumen Output 6W	12W	Lens	Code No 6W	12W
2700 K	570 lm	1140 lm	10°,20°,30°	464004	464014
3000 K	570 lm	1140 lm	10°,20°,30°	464001	464011
4000 K	582 lm	1162 lm	10°,20°,30°	464002	464012
6000 K	591 lm	1185 lm	10°,20°,30°	464003	464013

Two - Way





Kelvin	Real Lumen Output 2x 6W	2x 12W	Lens	Code No 6W	12W
2700 K	570 lm	1140 lm	10°,20°,30°	464104	464114
3000 K	570 lm	1140 lm	10°,20°,30°	464101	464111
4000 K	582 lm	1162 lm	10°,20°,30°	464102	464112
6000 K	591 lm	1185 lm	10°,20°,30°	464103	464113



Honeycomb
Code No: 953522



BELKIS APPLIQUES
Class I IP55 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Belkis Applique series consists of a range of LED and metal halide sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.






Body
Aluminium Profile
Cover
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered Glass
Gaskets
Silicone
Connection
IP connection box

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

One Way



Two Way





LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

BELKIS

APPLIQUES
Class I IP55 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



Power LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

BELKIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No One Way	Code No Two Way
1W	2700 K	95 lm	10°,25°,40°	425102	425112
1W	3000 K	95 lm	10°,25°,40°	425101	425111
1W	4000 K	97 lm	10°,25°,40°	425106	425116
1W	6000 K	99 lm	10°,25°,40°	425107	425117
Led Lamp		G9		340101	343101

BELKIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No One Way	Code No Two Way
3W	2700 K	285 lm	10°,25°,40°	425122	425132
3W	3000 K	285 lm	10°,25°,40°	425121	425131
3W	4000 K	290 lm	10°,25°,40°	425126	425136
3W	6000 K	296 lm	10°,25°,40°	425127	425137
Led Lamp		Gu10		341111	344111

BELKIS 5







Power	Kelvin	Real Lumen Output	Lens	Code No One Way	Code No Two Way
9W	2700 K	855 lm	10°,25°,40°	425142	425152
9W	3000 K	855 lm	10°,25°,40°	425141	425151
9W	4000 K	891 lm	10°,25°,40°	425146	425156
9W	6000 K	898 lm	10°,25°,40°	425147	425157
Led Lamp		E27		342111	345111

BELKIS 5 M.H.





Power	Lampholder	Code No One Way	Code No Two Way
35W METAL HALIDE	G12	346401	346501
70W METAL HALIDE	G12	346411	346511



Honeycomb
Belkis 1: 953521
Belkis 2: 953522
Belkis 5: 953525

EMFA



BELKIS 1

ACRYLIC APPLIQUES
Class I IP55 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015






Voltage : 240 VAC with integrated driver
Diffuser : Acrylic Pipe
Cable : Potted 1 m 3x1 H03 VV-F

One Way


Power	Lampholder	Code No
Led Lamp	G9	293301

Two Way


Power	Lampholder	Code No
Led Lamp	2x G9	293401

Torch Acrylic

Power	Lampholder	Code No
Led Lamp	G9	293201

Torch Acrylic

Power	Lampholder	Code No
Led Lamp	G9	293251

EMFA



SQUARE


APPLIQUES
Class I IP65 IK08

Available in any of these RAL colors



The Square Applique series consists of a range of LED and metal halide sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.



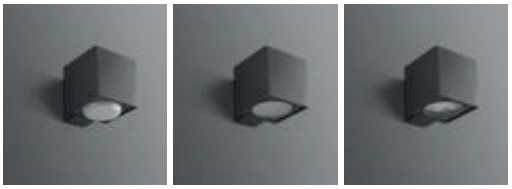

Body
Die cast aluminium
Cover
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered Glass
Gaskets
Silicone
Connection
IP connection box

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

One Way





LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

SQUARE

APPLIQUES
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



Power LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


CRI : >80 or >90

Cable : -

Single color LED options upon request are ;
Blue Amber Green Red

Clear Glass with Lens






Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434024
6W	3000 K	570 lm	10°,25°,40°	434021
6W	4000 K	582 lm	10°,25°,40°	434022
6W	6000 K	591 lm	10°,25°,40°	434023

Frosted Glass







Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434013
6W	3000 K	570 lm	10°,25°,40°	434011
6W	4000 K	582 lm	10°,25°,40°	434012
6W	6000 K	591 lm	10°,25°,40°	434014

Dot





Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	10°,25°,40°	434003
6W	3000 K	570 lm	10°,25°,40°	434001
6W	4000 K	582 lm	10°,25°,40°	434002
6W	6000 K	591 lm	10°,25°,40°	434004



Honeycomb
Code No: 953523


PEDASA

TWO WAY LED APPLIQUES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Pipe
Aluminium or Acrylic
Body
Aluminium profile
Paint
Electrostatic powder
Bracket
Die Cast Aluminium
Diffusers
Acrylic
Gaskets
Silicone
Connection
IP connection box

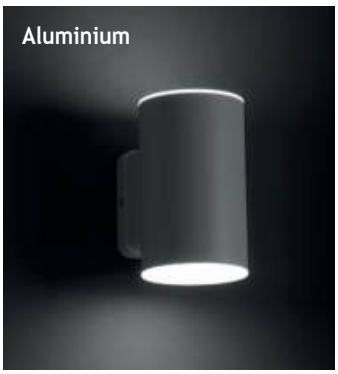




Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Acrylic
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

Pedasa 1








Power	Kelvin	Real Lumen Output	Code No Aluminium	Code No Acrylic
11W	2700 K	1045 lm	504003	504023
11W	3000 K	1045 lm	504001	504021
11W	4000 K	1065 lm	504002	504022
11W	6000 K	1089 lm	504004	504024

Pedasa 2








Power	Kelvin	Real Lumen Output	Code No Aluminium	Code No Acrylic
11W	2700 K	1045 lm	504013	504033
11W	3000 K	1045 lm	504011	504031
11W	4000 K	1065 lm	504012	504032
11W	6000 K	1089 lm	504014	504034

Square





Power	Kelvin	Real Lumen Output	Code No Aluminium
11W	2700 K	1045 lm	504043
11W	3000 K	1045 lm	504041
11W	4000 K	1065 lm	504042
11W	6000 K	1089 lm	504044

EMFA

SATURN

APPLIQUES
Class I IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015



Voltage : 240V A.C with integrated driver
Diffuser : Glass
Transformer : Electronic
Cable : Potted 1m 3x1 H03 VV-F

Saturn 1






Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525101

Saturn 2






Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525201

Saturn 3





Power	Lampholder	Code No
ELECTRONIC FLUO. DEL 23W	E27	525301



Spots



DARA LED SPOTS
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


The Dara Spot series has an LED source to deliver the desired light effect to facades, columns, bridges, monuments, signs, and trees. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment (grey, anthracite, black, white, green and beige). The spots can be mounted on surfaces, in the ground or concrete with a picket, or on a pole with the addition of a simple adaptor. Once installed, the special joint system allows for 100° horizontal and 180° vertical adjustment.

The LEDs used come in 4 different tones of white (2700K, 3000K, 4000K, 6000K). Several lenses from 10 to 30 degrees are available to choose from to achieve the desired light effect.

Body
Die cast aluminium
Paint
Electrostatic powder
Pipe
Aluminium Profile
Gaskets
Silicone
Diffusers
Tempered Glass

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.





LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.












DARA

LED SPOTS
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


COB LEDs


Voltage : 12V - 24V (240V A.C with integrated driver)

Diffuser : Clear Glass 4 mm
(Frosted Glass on request)

CRI : >80 or >90



Cable : Potted 1m 3x1 H03 VV-F

DARA 2


Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Code No Twin
350mm	6W	2700 K	570 lm	10°,20°,30°	553003	554003
350mm	6W	3000 K	570 lm	10°,20°,30°	553001	554001
350mm	6W	4000 K	590 lm	10°,20°,30°	553002	554002
500mm	6W	2700 K	570 lm	10°,20°,30°	553103	554103
500mm	6W	3000 K	570 lm	10°,20°,30°	553101	554101
500mm	6W	4000 K	590 lm	10°,20°,30°	553102	554102
700mm	6W	2700 K	570 lm	10°,20°,30°	553203	554203
700mm	6W	3000 K	570 lm	10°,20°,30°	553201	554201
700mm	6W	4000 K	590 lm	10°,20°,30°	553202	554202

DARA 3





Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Code No Twin
350mm	11W	2700 K	1045 lm	10°,20°,30°	555003	556003
350mm	11W	3000 K	1045 lm	10°,20°,30°	555001	556001
350mm	11W	4000 K	1070 lm	10°,20°,30°	555002	556002
500mm	11W	2700 K	1045 lm	10°,20°,30°	555103	556103
500mm	11W	3000 K	1045 lm	10°,20°,30°	555101	556101
500mm	11W	4000 K	1070 lm	10°,20°,30°	555102	556102
700mm	11W	2700 K	1045 lm	10°,20°,30°	555203	556203
700mm	11W	3000 K	1045 lm	10°,20°,30°	555201	556201
700mm	11W	4000 K	1070 lm	10°,20°,30°	555202	556202

DARA 4


Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Code No Twin
350mm	16W	2700 K	1520 lm	10°,20°,30°	557003	558003
350mm	16W	3000 K	1520 lm	10°,20°,30°	557001	558001
350mm	16W	4000 K	1590 lm	10°,20°,30°	557002	558002
500mm	16W	2700 K	1520 lm	10°,20°,30°	557103	558103
500mm	16W	3000 K	1520 lm	10°,20°,30°	557101	558101
500mm	16W	4000 K	1590 lm	10°,20°,30°	557102	558102
700mm	16W	2700 K	1520 lm	10°,20°,30°	557203	558203
700mm	16W	3000 K	1520 lm	10°,20°,30°	557201	558201
700mm	16W	4000 K	1590 lm	10°,20°,30°	557202	558202



For Dara Recessing Tube
Internal Driver
Code No: 953553



For Dara Picket
External Driver
Code No: 953552



Honeycomb
Dara 2 : 953551
Dara 3 : 953561
Dara 4 : 953571

EMFA

SQUARE MINI LED SPOT
Class I IP67 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



Body
Die cast aluminium
Paint
Electrostatic powder
Gaskets
Silicone
Diffusers
Tempered Glass






Power LED or COB LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Lens : 10°, 25°, 40°
Diffuser : Clear Glass 4 mm (Frosted Glass on request)
Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	438004
1W LED	3000 K	95 lm	10°,25°,40°	438001
1W LED	4000 K	97 lm	10°,25°,40°	438002
1W LED	6000 K	99 lm	10°,25°,40°	438003
3W LED	2700 K	285 lm	10°,25°,40°	438014
3W LED	3000 K	285 lm	10°,25°,40°	438011
3W LED	4000 K	290 lm	10°,25°,40°	438012
3W LED	6000 K	296 lm	10°,25°,40°	438013






12-24V Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	438024
6W LED	3000 K	570 lm	10°,25°,40°	438021
6W LED	4000 K	580 lm	10°,25°,40°	438022
6W LED	6000 K	592 lm	10°,25°,40°	438023


12V - 24V (240V A.C with external driver)



Visor
Code No: 953712



Cylinder Visor
Code No: 953713



Honeycomb
Code No: 953714



Picket
Code No: 953711

EMFA

SQUARE

LED SPOT WITH TIR LENS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Square Spot series consists of a range of LED, metal halide and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, signs, and trees. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment (grey, anthracite, black, white, green and beige). The spots can be mounted on surfaces, in the ground or concrete with a picket, or on a pole with the addition of a simple adaptor. Two adaptors are available for two sizes of poles. Once installed, the special joint system allows for 100° horizontal and 180° vertical adjustment. The gearboxes are filled with cast resin and have a pre-potted cable for IP67. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.




Body
Die cast aluminium
Paint
Electrostatic powder
Gaskets
Silicone
Diffusers
Tempered Glass

Power LED or COB LEDs


Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : Clear Glass 4 mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	434103
6W LED	3000 K	570 lm	10°,25°,40°	434101
6W LED	4000 K	580 lm	10°,25°,40°	434102
6W LED	6000 K	592 lm	10°,25°,40°	434104
12W LED	2700 K	1140 lm	10°,25°,40°	434113
12W LED	3000 K	1140 lm	10°,25°,40°	434111
12W LED	4000 K	1185 lm	10°,25°,40°	434112
12W LED	6000 K	1192 lm	10°,25°,40°	434114


Visor
Code No: 953911


Cylinder Visor
Code No: 953912


Honeycomb
Code No: 953931


Picket
Code No: 953901





BELKIS

LED SPOTS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The Belkis Spot series consists of a range of LED, metal halide and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, signs, and trees. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment (grey, anthracite, black, white, green and beige). The spots can be mounted on surfaces, in the ground or concrete with a picket, or on a pole with the addition of a simple adaptor. Two adaptors are available for two sizes of poles. Once installed, the special joint system allows for 100° horizontal and 180° vertical adjustment. The gearboxes are either filled with cast resin and have a pre-potted cable for IP67, or have a stainless steel cover and cable glands for IP55. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

Body
Die cast aluminium
Paint
Electrostatic powder
Gearbox Cover
Stainless steel
Gaskets
Silicone
Diffusers
Tempered Glass

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.














LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50ºC. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

BELKIS MINI

LED SPOT
LED DRIVER IN HEAD
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12V - 24V AC or DC on request)


Lens : 10°, 25° or 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2m 3x0,75 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	297104
1W LED	3000 K	95 lm	10°,25°,40°	297101
1W LED	4000 K	97 lm	10°,25°,40°	297102
1W LED	6000 K	99 lm	10°,25°,40°	297103
3W LED	2700 K	285 lm	10°,25°,40°	297114
3W LED	3000 K	285 lm	10°,25°,40°	297111
3W LED	4000 K	290 lm	10°,25°,40°	297112
3W LED	6000 K	296 lm	10°,25°,40°	297113






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	297124
6W LED	3000 K	570 lm	10°,25°,40°	297121
6W LED	4000 K	585 lm	10°,25°,40°	297122
6W LED	6000 K	592 lm	10°,25°,40°	297123


12V - 24V (240V A.C with external driver)





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	297134
1W LED	3000 K	95 lm	10°,25°,40°	297131
1W LED	4000 K	97 lm	10°,25°,40°	297132
1W LED	6000 K	99 lm	10°,25°,40°	297133
3W LED	2700 K	285 lm	10°,25°,40°	297144
3W LED	3000 K	285 lm	10°,25°,40°	297141
3W LED	4000 K	290 lm	10°,25°,40°	297142
3W LED	6000 K	296 lm	10°,25°,40°	297143





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	297154
6W LED	3000 K	570 lm	10°,25°,40°	297151
6W LED	4000 K	585 lm	10°,25°,40°	297152
6W LED	6000 K	592 lm	10°,25°,40°	297153

12V - 24V (240V A.C with external driver)


For Belkıs Mini



Picket
Code No: 953711



Visor
Code No: 953712



Cylinder Visor
Code No: 953713




Honeycomb
Code No: 953714



Clamp
Code No: 953715

EMFA

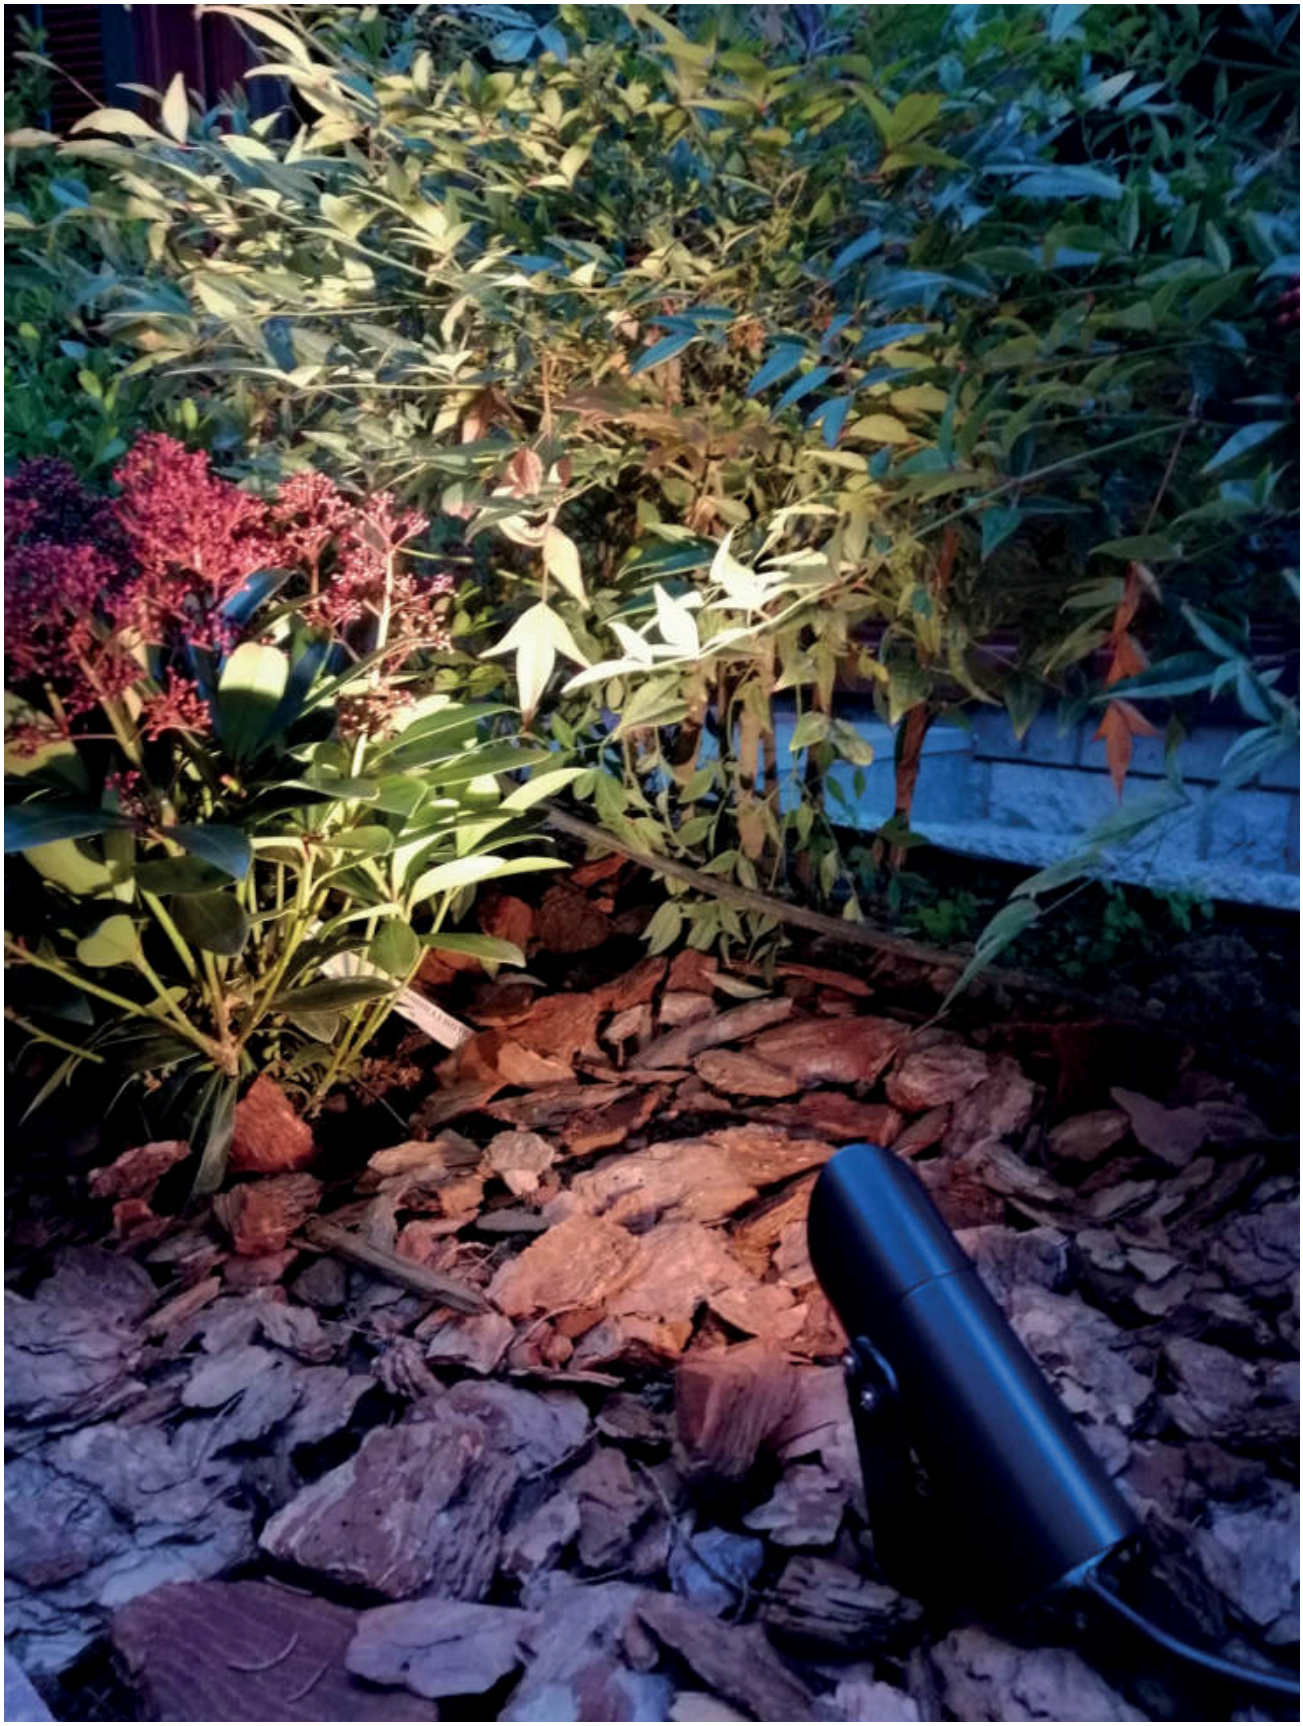

BELKIS 1

LED SPOT
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12V - 24V AC or DC on request)


Lens : 10°, 25° or 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2m 3x0,75 H03 VV-F


Single color LED options upon request are ;
Blue Amber Green Red






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	330212
1W LED	3000 K	95 lm	10°,25°,40°	330211
1W LED	4000 K	97 lm	10°,25°,40°	330216
1W LED	6000 K	99 lm	10°,25°,40°	330217
3W LED	2700 K	285 lm	10°,25°,40°	330224
3W LED	3000 K	285 lm	10°,25°,40°	330221
3W LED	4000 K	290 lm	10°,25°,40°	330222
3W LED	6000 K	296 lm	10°,25°,40°	330223





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	330202
1W LED	3000 K	95 lm	10°,25°,40°	330201
1W LED	4000 K	97 lm	10°,25°,40°	330206
1W LED	6000 K	99 lm	10°,25°,40°	330207
3W LED	2700 K	285 lm	10°,25°,40°	330254
3W LED	3000 K	285 lm	10°,25°,40°	330251
3W LED	4000 K	290 lm	10°,25°,40°	330252
3W LED	6000 K	296 lm	10°,25°,40°	330253
6W COB LED		570 lm	25°,40°	330261






Power	Lampholder	Code No
Led Lamp	Gu4	330121

12V - 24V (240V A.C with external driver)





Power	Lampholder	Code No
Led Lamp	Gu4	330101

12V - 24V (240V A.C with external driver)


For Belkis 1



Picket
Code No: 953805



Visor
Code No: 953531



Cylinder Visor
Code No: 953581



Honeycomb
Code No: 953521



Clamp
Code No: 953715

EMFA


GLORIA

BELKIS 2 LED SPOT
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





POWER LED or COB LED

Voltage : 240V A.C with integrated driver (12V - 24V AC or DC on request)

Lens : 10°, 25° or 40°


Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2m 3x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

Power LEDs Driver in Base






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	331212
3W LED	3000 K	285 lm	10°,25°,40°	331211
3W LED	4000 K	290 lm	10°,25°,40°	331216
3W LED	6000 K	296 lm	10°,25°,40°	331217
9W LED	2700 K	855 lm	10°,25°,40°	331234
9W LED	3000 K	855 lm	10°,25°,40°	331231
9W LED	4000 K	872 lm	10°,25°,40°	331232
9W LED	6000 K	890 lm	10°,25°,40°	331233
9W LED	RGB		25°,40°	331221

Power LEDs Driver in Head






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	331202
3W LED	3000 K	285 lm	10°,25°,40°	331201
3W LED	4000 K	290 lm	10°,25°,40°	331206
3W LED	6000 K	296 lm	10°,25°,40°	331207

COB LED Driver in Base






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,20°,30°	331243
6W LED	3000 K	570 lm	10°,20°,30°	121001
6W LED	4000 K	581 lm	10°,20°,30°	121002
6W LED	6000 K	592 lm	10°,20°,30°	331244
11W LED	2700 K	1045 lm	10°,20°,30°	331253
11W LED	3000 K	1045 lm	10°,20°,30°	121011
11W LED	4000 K	1065 lm	10°,20°,30°	121012
11W LED	6000 K	1087 lm	10°,20°,30°	331254

COB LED Driver in Head





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,20°,30°	331263
6W LED	3000 K	570 lm	10°,20°,30°	331261
6W LED	4000 K	581 lm	10°,20°,30°	331262
6W LED	6000 K	592 lm	10°,20°,30°	331264


For Belkıs 2



Picket
Code No: 953825



Visor
Code No: 953532



Cylinder Visor
Code No: 953582



Honeycomb
Code No: 953522



Clamp
Code No: 953715

EMFA


GALATAPORT
CONNECT

BELKIS 2

SPOTS
Class I IP67 IK10

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015






Lampholder : Gu10
Reflector : -
Diffuser : 8 mm Glass

BELKIS 2 WITH SIDE ARM


Power	Lampholder	Code No
Led Lamp	Gu 10	331121

BELKIS 2 WITH CENTRAL ARM


Power	Lampholder	Code No
Led Lamp	Gu 10	331141

HIGH SPOT

Power	Lampholder	Code No Single	Code No Twin
Led Lamp	Gu 10	331501	331601

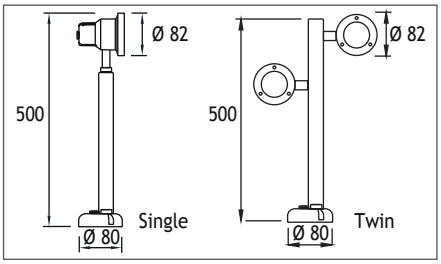





For Belkis 2

Picket Code No: 953825
Visor Code No: 953532
Cylinder Visor Code No: 953582
Honeycomb Code No: 953522
Clamp Code No: 953715

EMFA



BELKIS 3 LED SPOT
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



POWER LED or COB LED


Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Lens : 10°, 25°, 40° / (Mirror TIR Lens Options)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


Cable : Potted 5m 3x0,75 H03 VV-F





Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	331312
3W LED	3000 K	285 lm	10°,25°,40°	331311
3W LED	4000 K	290 lm	10°,25°,40°	331316
3W LED	6000 K	296 lm	10°,25°,40°	331317
18W LED	2700 K	1710 lm	10°,25°,40°	331334
18W LED	3000 K	1710 lm	10°,25°,40°	331331
18W LED	4000 K	1744 lm	10°,25°,40°	331332
18W LED	6000 K	1779 lm	10°,25°,40°	331333
18W LED	RGB		25°,40°	331321






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	331302
6W LED	3000 K	570 lm	10°,25°,40°	331301
6W LED	4000 K	581 lm	10°,25°,40°	331306
6W LED	6000 K	592 lm	10°,25°,40°	331307

TIR LENS






Power	Kelvin	Real Lumen Output	Lens	Code No
12W LED	2700 K	1140 lm	10°,20°,30°	331343
12W LED	3000 K	1140 lm	10°,20°,30°	121101
12W LED	4000 K	1162 lm	10°,20°,30°	121102
18W LED	2700 K	1710 lm	10°,20°,30°	331353
18W LED	3000 K	1710 lm	10°,20°,30°	121111
18W LED	4000 K	1744 lm	10°,20°,30°	121112

For Belkis 3


Picket
Code No: 953805


Visor
Code No: 953531


Cylinder Visor
Code No: 953583


Honeycomb
Code No: 953523


Clamp
Code No: 953715

EMFA



BELKIS 4 LED SPOT
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



POWER LED or COB LED

Voltage : 240V A.C with integrated driver (24V AC or DC on request)


Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5m 3x0,75 H03 VV-F

DRIVER IN BASE






Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	331412
9W LED	3000 K	855 lm	10°,25°,40°	331411
9W LED	4000 K	872 lm	10°,25°,40°	331416
9W LED	6000 K	890 lm	10°,25°,40°	331417
27W LED	2700 K	2560 lm	10°,25°,40°	331424
27W LED	3000 K	2560 lm	10°,25°,40°	331421
27W LED	4000 K	2610 lm	10°,25°,40°	331422
27W LED	6000 K	2670 lm	10°,25°,40°	331423

DRIVER IN HEAD






Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	331402
9W LED	3000 K	855 lm	10°,25°,40°	331401
9W LED	4000 K	872 lm	10°,25°,40°	331406
9W LED	6000 K	890 lm	10°,25°,40°	331407

12V - 24V (240V A.C with external driver)

TIR LENS





Power	Kelvin	Real Lumen Output	Lens	Code No
25W LED	2700 K	2375 lm	10°,20°,30°	121203
25W LED	3000 K	2375 lm	10°,20°,30°	121201
25W LED	4000 K	2422 lm	10°,20°,30°	121202
32W LED	2700 K	3040 lm	10°,20°,30°	121213
32W LED	3000 K	3040 lm	10°,20°,30°	121211
32W LED	4000 K	3100 lm	10°,20°,30°	121212


For Belkis 4



Picket Code No: 953805



Visor Code No: 953531



Cylinder Visor Code No: 953584




Honeycomb Code No: 953524



Clamp Code No: 953715

EMFA

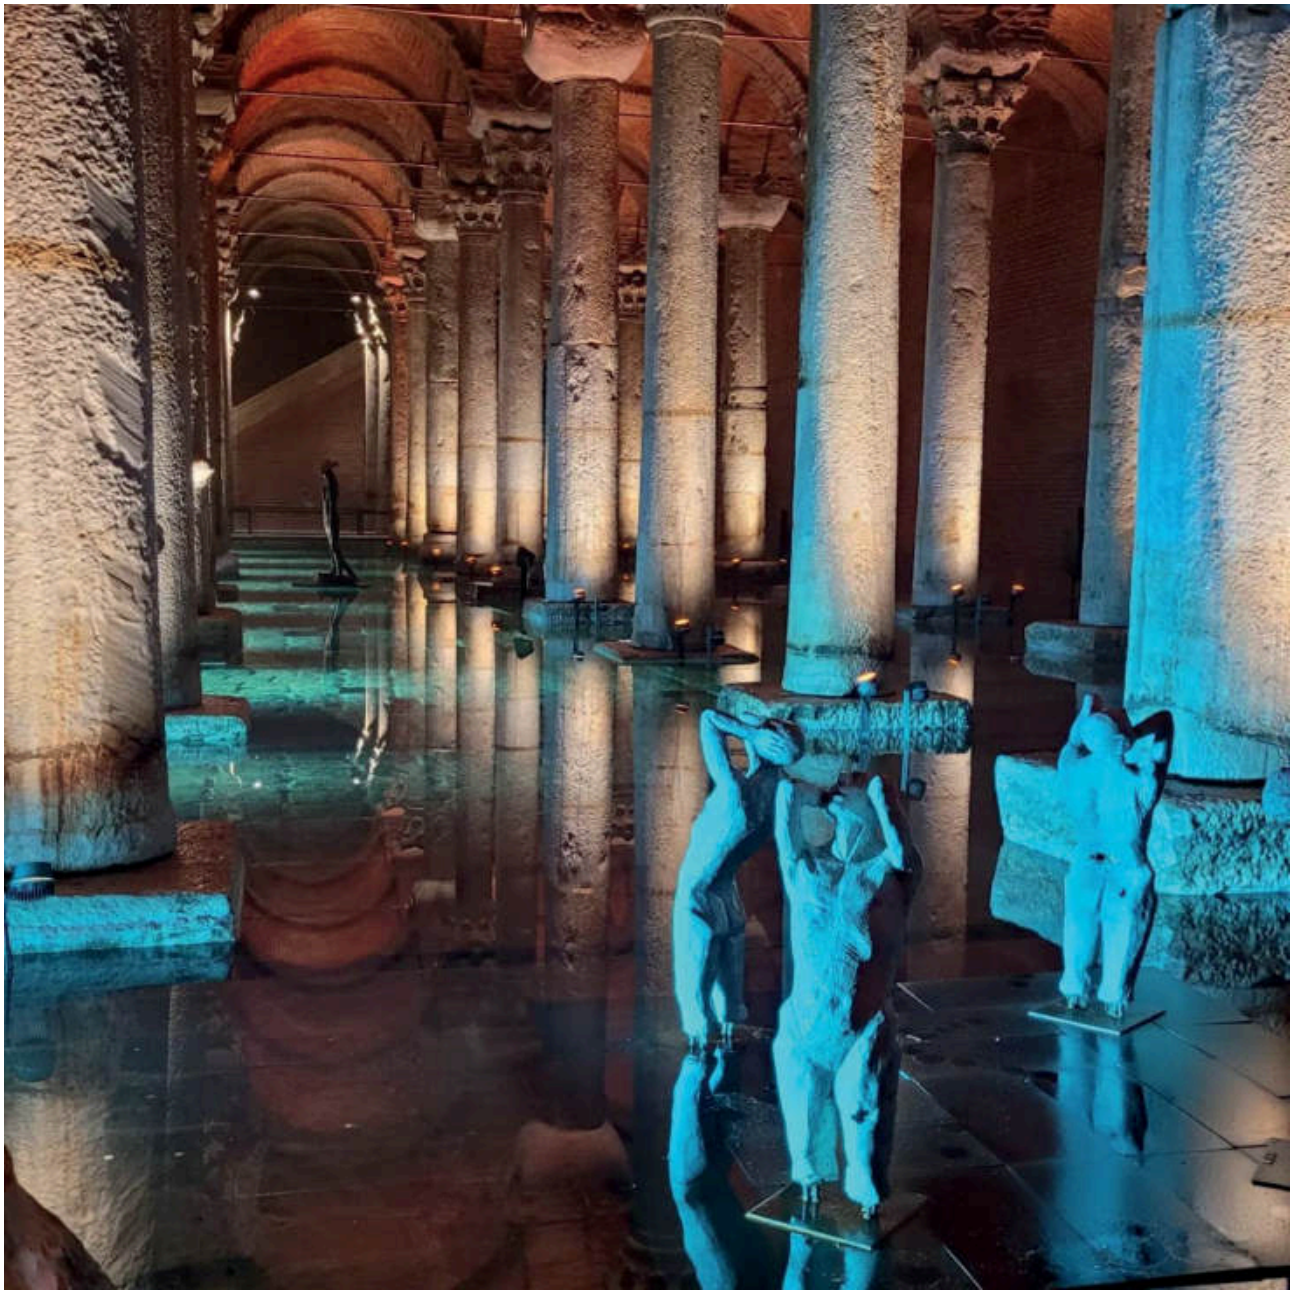

BELKIS 5 LED SPOT
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



POWER LED or COB LED

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)


Lens : 10°, 25°, 40° / (Mirror TIR Lens Options)

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5m 3x0,75 H03 VV-F

DRIVER IN BASE






Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	425632
9W LED	3000 K	855 lm	10°,25°,40°	425631
9W LED	4500 K	872 lm	10°,25°,40°	425636
9W LED	6000 K	890 lm	10°,25°,40°	425637
27W LED	2700 K	2560 lm	10°,25°,40°	425652
27W LED	3000 K	2560 lm	10°,25°,40°	425651
27W LED	4500 K	2670 lm	10°,25°,40°	425653
27W LED	RGB		10°,25°,40°	425641

DRIVER IN HEAD





Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	425612
9W LED	3000 K	855 lm	10°,25°,40°	425611
9W LED	4500 K	872 lm	10°,25°,40°	425616
9W LED	6000 K	890 lm	10°,25°,40°	425617


For Belkis 5



Picket
Code No: 953805



Visor
Code No: 953531



Cylinder Visor
Code No: 953585



Honeycomb
Code No: 953525



Clamp
Code No: 953715

EMFA

BELKIS 5 SPOT
Class I IP67 IK10

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015



Lampholder : E27
Reflector : -
Diffuser : 8 mm Clear Glass

WITH SIDE ARM






Power	Lampholder	Code No
PAR 30 Led Lamp	E27	332121

WITH CENTRAL ARM







Power	Lampholder	Code No
PAR 30 Led Lamp	E27	332131

For Belkis 5



Picket
Code No: 953805


Visor
Code No: 953531


Cylinder Visor
Code No: 953585


Honeycomb
Code No: 953525


Clamp
Code No: 953715

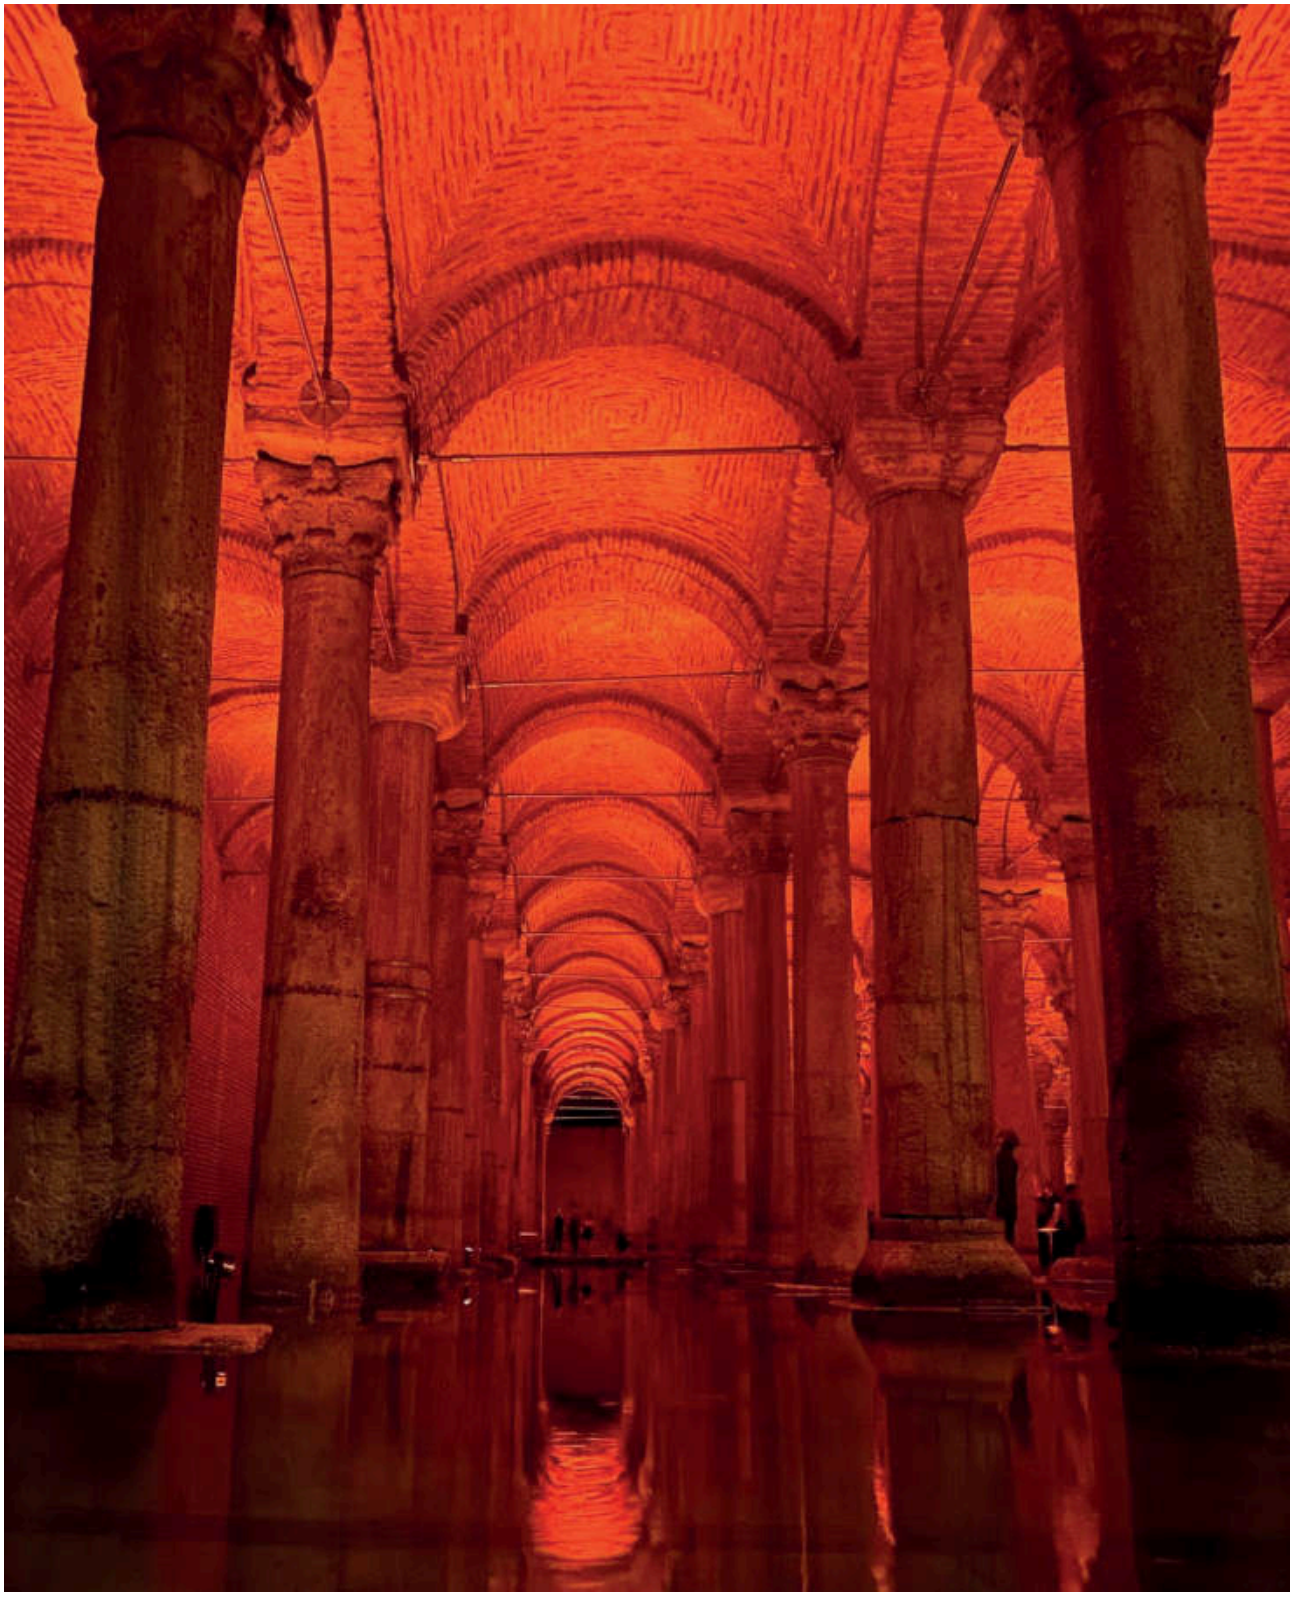

BELKIS 5 SPOTS
Class I IP67 IK10

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015



Lampholder : PGJ 5, G 8.5
Diffuser : Clear Glass 8 mm
Gear : Electronic (in lamp)
Cable : Potted 5m 3x0,75 H03 VV-F

WITH GEARBOX






Power	Lampholder	Code No
35W METAL HALIDE	PGJ 5	332201
70W METAL HALIDE	PGJ 5	332211

WITH GEARBOX






Power	Lampholder	Code No
35W METAL HALIDE	G 8.5	332221
70W METAL HALIDE	G 8.5	332231

For Belkis 5


Picket
Code No: 953805


Visor
Code No: 953531


Cylinder Visor
Code No: 953585


Honeycomb
Code No: 953525


Clamp
Code No: 953715


VOLKSWAGEN
ARENA

BELKIS 6

SPOTS WITH GEARBOX
Class I IP67 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Lampholder : G12
Reflector : 30°,42°
Diffuser : Clear Glass
Gear : Electronic





Power	Lampholder	Code No
35W METAL HALIDE	G12	138201
70W METAL HALIDE	G12	138211






Power	Lampholder	Code No
150W METAL HALIDE	G12	138221


For Belkıs 6



Picket
Code No: 953805



Visor
Code No: 953531



Cylinder Visor
Code No: 953586



Honeycomb
Code No: 953525



Clamp
Code No: 953715

RESPOT 3

SPOT WITH RECESSED GEARBOX
Class I IP67 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Lampholder : G12, Gx8.5
Reflector : 30°,42°
Diffuser : Clear Glass






Power	Lampholder	Code No
35W METAL HALIDE	G12	137101
70W METAL HALIDE	G12	137111





Power	Lampholder	Code No
35W METAL HALIDE	Gx8.5	137121
70W METAL HALIDE	Gx8.5	137131



For RESPOT 3
Visor
Code No: 953536

EMFA

HARRAN LED SPOTS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


The Harran Spot series has an LED source to deliver the desired light effect to facades, columns, bridges, monuments, signs, and trees. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment (grey, anthracite, black, white, green and beige). The spots can be mounted on surfaces, in the ground or concrete with a picket, or on a pole with the addition of a simple adaptor. Once installed, the special joint system allows for 100° horizontal and 180° vertical adjustment.

The LEDs used come in 4 different tones of white (2700K, 3000K, 4000K, 6000K). Several lenses from 10 to 60 degrees are available to choose from to achieve the desired light effect.



Body
Die cast aluminium
Paint
Electrostatic powder
Gearbox Cover
Die cast aluminium
Gaskets
Silicone
Diffusers
Tempered Glass

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

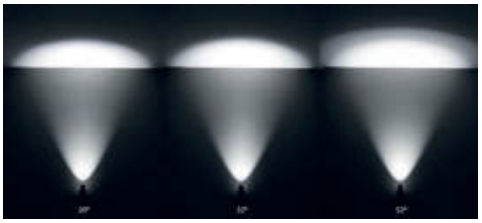





LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50ºC. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

HARRAN

LED SPOTS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



COB LED

Voltage : 240V A.C with integrated driver (24V AC or DC on request)


Lens : 10°, 25°, 40° or 60°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2 m 3x1 H03 VV-F

HARRAN MINI






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°,60°	155001
6W LED	3000 K	570 lm	10°,25°,40°,60°	155002
6W LED	4500 K	581 lm	10°,25°,40°,60°	155003
6W LED	6000 K	592 lm	10°,25°,40°,60°	155004

HARRAN 2






Power	Kelvin	Real Lumen Output	Lens	Code No
18W LED	2700 K	1710 lm	10°,25°,40°,60°	155101
18W LED	3000 K	1710 lm	10°,25°,40°,60°	155102
18W LED	4500 K	1744 lm	10°,25°,40°,60°	155103
18W LED	6000 K	1779 lm	10°,25°,40°,60°	155104

HARRAN 3






Power	Kelvin	Real Lumen Output	Lens	Code No
36W LED	2700 K	3420 lm	10°,25°,40°,60°	155201
36W LED	3000 K	3420 lm	10°,25°,40°,60°	155202
36W LED	4500 K	3480 lm	10°,25°,40°,60°	155203
36W LED	6000 K	3550 lm	10°,25°,40°,60°	155204

HARRAN 4





Power	Kelvin	Real Lumen Output	Lens	Code No
70W LED	2700 K	6650 lm	10°,25°,40°,60°	155301
70W LED	3000 K	6650 lm	10°,25°,40°,60°	155302
70W LED	4500 K	6780 lm	10°,25°,40°,60°	155303
70W LED	6000 K	6920 lm	10°,25°,40°,60°	155304


For Harran



Picket
Code No: 953941



Visor
Code No: 953942



Cylinder Visor
Code No: 953943



Honeycomb
Code No: 953944



Clamp
Code No: 953945

EMFA

EDESSA LED SPOTS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


The Edessa Spot series has an LED source to deliver the desired light effect to facades, columns, bridges, monuments, signs, and trees. The series is made of die-cast aluminium and painted with electrostatic powder paint. Six standard RAL colors can be chosen to adapt the spots to their environment (grey, anthracite, black, white, green, and beige). The spots can be mounted on surfaces, in the ground or concrete with a picket, or on a pole with the addition of a simple adaptor. Once installed, the special joint system allows for 100° horizontal and 180° vertical adjustment.


The LEDs used come in four different tones of white (2700K, 3000K, 4000K, 6000K). Several lenses from 10° to 60° are available to choose from to achieve the desired light effect.



Body
Die cast aluminium
Paint
Electrostatic powder
Gearbox Cover
Die cast aluminium
Gaskets
Silicone
Diffusers
Tempered Glass

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

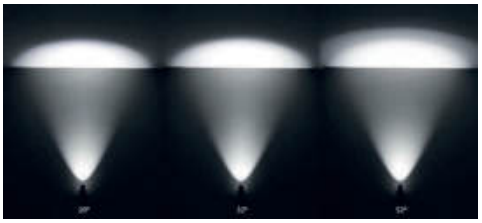

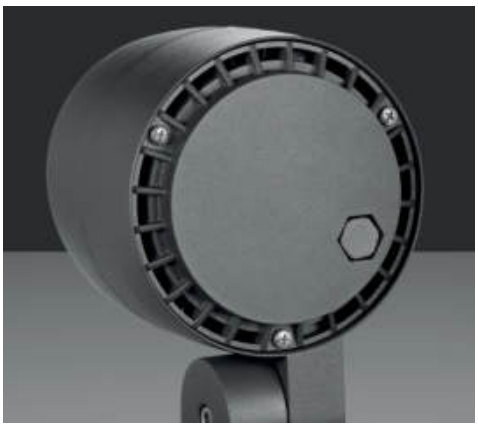

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50ºC. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

EDESSA

LED SPOTS
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



COB LED

Voltage : 240V A.C with integrated driver (24V AC or DC on request)


Lens : 10°, 25°, 40° or 60°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2 m 3x1 H03 VV-F

EDESSA 2






Power	Kelvin	Real Lumen Output	Lens	Code No
18W LED	2700 K	1710 lm	10°,25°,40°,60°	188001
18W LED	3000 K	1710 lm	10°,25°,40°,60°	188002
18W LED	4500 K	1744 lm	10°,25°,40°,60°	188003
18W LED	6000 K	1779 lm	10°,25°,40°,60°	188004


EDESSA 3





Power	Kelvin	Real Lumen Output	Lens	Code No
36W LED	2700 K	3420 lm	10°,25°,40°,60°	188101
36W LED	3000 K	3420 lm	10°,25°,40°,60°	188102
36W LED	4500 K	3480 lm	10°,25°,40°,60°	188103
36W LED	6000 K	3550 lm	10°,25°,40°,60°	188104

For Edessa



Picket
Code No: 953951



Honeycomb
Code No: 953954



Clamp
Code No: 953955

EMFA

Bollards



TRION LED BOLLARDS
Class I IP65 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


EMFA's Trion series combines a die-cast aluminium head with an extrusion aluminium pipe to provide a sturdy, outdoor bollard/pole. The fixture is designed to light pathways, landscapes and open spaces. The TRION bollard can give light both in the downward and upward direction. The light is very directional and honeycomb louvers can be used to avoid extra glare. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 27W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete.



Up



Down



Head
Die cast aluminium
With Screwless lock system
Outer Asymmetrical Grill
Die cast aluminium
Diffuser
Tempered Glass
Pipe
Extrusion aluminium
Paint
Electrostatic powder



Trion 1 Single



Trion 1 Twin



Trion 2 Single



Trion 2 Twin



TRION LED BOLLARDS IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Led : Power or COB LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Tempered Clear or Frosted Glass

Trion 1 Single






Power	Kelvin	Real Lumen Output	Lens	Code No 45 cm	70 cm	110 cm
6W LED	2700 K	570 lm	10°,25°,40°	171001	171101	171201
6W LED	3000 K	570 lm	10°,25°,40°	171002	171102	171202
6W LED	4500 K	581 lm	10°,25°,40°	171003	171103	171203
6W LED	6000 K	592 lm	10°,25°,40°	171004	171104	171204
11W LED	2700 K	1045 lm	10°,25°,40°	171011	171111	171211
11W LED	3000 K	1045 lm	10°,25°,40°	171012	171112	171212
11W LED	4500 K	1065 lm	10°,25°,40°	171013	171113	171213
11W LED	6000 K	1087 lm	10°,25°,40°	171014	171114	171214

Trion 1 Twin






Power	Kelvin	Real Lumen Output	Lens	Code No 70 cm	90 cm	110 cm
6W LED	2700 K	570 lm	10°,25°,40°	172001	172101	172201
6W LED	3000 K	570 lm	10°,25°,40°	172002	172102	172202
6W LED	4500 K	581 lm	10°,25°,40°	172003	172103	172203
6W LED	6000 K	592 lm	10°,25°,40°	172004	172104	172204
11W LED	2700 K	1045 lm	10°,25°,40°	172011	172111	172211
11W LED	3000 K	1045 lm	10°,25°,40°	172012	172112	172212
11W LED	4500 K	1065 lm	10°,25°,40°	172013	172113	172213
11W LED	6000 K	1087 lm	10°,25°,40°	172014	172114	172214

Trion 2 Single







Power	Kelvin	Real Lumen Output	Lens	Code No 45 cm	70 cm	110 cm
11W LED	2700 K	1045 lm	10°,25°,40°	173001	173101	173201
11W LED	3000 K	1045 lm	10°,25°,40°	173002	173102	173202
11W LED	4500 K	1065 lm	10°,25°,40°	173003	173103	173203
11W LED	6000 K	1087 lm	10°,25°,40°	173004	173104	173204
24W LED	2700 K	2280 lm	10°,25°,40°	173011	173111	173211
24W LED	3000 K	2280 lm	10°,25°,40°	173012	173112	173212
24W LED	4500 K	2350 lm	10°,25°,40°	173013	173113	173213
24W LED	6000 K	2395 lm	10°,25°,40°	173014	173114	173214

Trion 2 Twin





Power	Kelvin	Real Lumen Output	Lens	Code No 70 cm	90 cm	110 cm
11W LED	2700 K	1045 lm	10°,25°,40°	174001	174101	174201
11W LED	3000 K	1045 lm	10°,25°,40°	174002	174102	174202
11W LED	4500 K	1065 lm	10°,25°,40°	174003	174103	174203
11W LED	6000 K	1087 lm	10°,25°,40°	174004	174104	174204
24W LED	2700 K	2280 lm	10°,25°,40°	174011	174111	174211
24W LED	3000 K	2280 lm	10°,25°,40°	174012	174112	174212
24W LED	4500 K	2350 lm	10°,25°,40°	174013	174113	174213
24W LED	6000 K	2395 lm	10°,25°,40°	174014	174114	174214



For Trion **Anchor** Code No: 953651

EMFA

HARRAN MINI LED BOLLARD
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's HARRAN Bollard series combines a die-cast aluminium head with an extrusion aluminium pipe to provide a sturdy, outdoor bollard. The fixture is designed to light pathways, landscapes and open spaces. The HARRAN Bollard gives light both in the downward and upward direction. The light is very directional. Visors and honeycomb louvers can be used to avoid extra glare. The head contains LEDs that can be powered up to 6W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete.








Body
Die cast aluminium
Paint
Electrostatic powder
Gearbox Cover
Stainless steel
Gaskets
Silicone
Diffusers
Tempered Glass

Harran Mini Single








Power	Kelvin	Real Lumen Output	Lens	Code No 45 cm	70 cm	90 cm
6W LED	2700 K	570 lm	10°,25°,40°	175001	175101	175201
6W LED	3000 K	570 lm	10°,25°,40°	175002	175102	175202
6W LED	4500 K	581 lm	10°,25°,40°	175003	175103	175203
6W LED	6000 K	592 lm	10°,25°,40°	175004	175104	175204

Harran Mini Twin





Power	Kelvin	Real Lumen Output	Lens	Code No 45 cm	70 cm	90 cm
2x6W LED	2700 K	1140 lm	10°,25°,40°	176001	176101	176201
2x6W LED	3000 K	1140 lm	10°,25°,40°	176002	176102	176202
2x6W LED	4500 K	1162 lm	10°,25°,40°	176003	176103	176203
2x6W LED	6000 K	1186 lm	10°,25°,40°	176004	176104	176204

For Harran	Picket	Visor	Cylinder Visor	Honeycomb
				
	Code No: 953661	Code No: 953662	Code No: 953663	Code No: 953664

LEON LED BOLLARD
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Leon Bollard combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The bollard is designed to light pathways, landscapes and open spaces. The Leon bollard gives light only in the downward direction. This avoids any kind of glare and light pollution. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 12W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete or a picket to mount into the earth.



Head
Die cast aluminium
Diffusers
Frosted polyamide 6.6
Pipe
Extrusion aluminium
Paint
Electrostatic powder

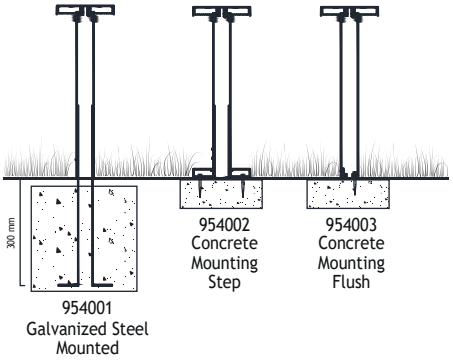

CIRCULAR LED


Led : Circular LEDs (6W or 12W)

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

CRI : >80

350mm






Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	177003
6W	3000 K	570 lm	177001
6W	4000 K	581 lm	177002
12W	2700 K	1140 lm	177013
12W	3000 K	1140 lm	177011
12W	4000 K	1162 lm	177012

500mm






Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	177103
6W	3000 K	570 lm	177101
6W	4000 K	581 lm	177102
12W	2700 K	1140 lm	177113
12W	3000 K	1140 lm	177111
12W	4000 K	1162 lm	177112

700mm





Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	177203
6W	3000 K	570 lm	177201
6W	4000 K	581 lm	177202
12W	2700 K	1140 lm	177213
12W	3000 K	1140 lm	177211
12W	4000 K	1162 lm	177212



LEON WOOD

LED BOLLARD
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Real wood is the preferred material of architects for cutting edge designs. Our LEON Wood bollard is made of IROKO wood with an incredibly smooth finish. The Wood Bollard can blend into the architecture of a building and mature together with its surroundings. The simple form of the Wood Bollard is emphasized with the light that comes out from the solid structure.



Head
Die cast aluminium & Wood
Diffusers
Frosted polyamide 6.6
Pipe
Wood

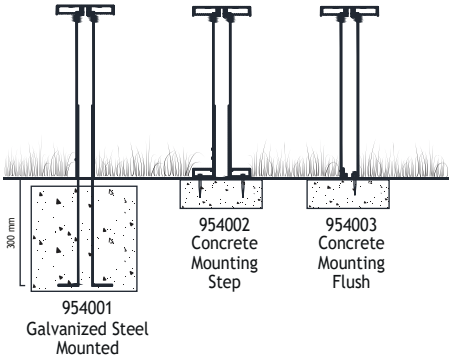

CIRCULAR LED


Led : Circular LEDs (6W or 12W)

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

CRI : >80

350mm






Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	189001
6W	3000 K	570 lm	189002
6W	4000 K	581 lm	189003
12W	2700 K	1140 lm	189011
12W	3000 K	1140 lm	189012
12W	4000 K	1162 lm	189013

500mm






Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	189101
6W	3000 K	570 lm	189102
6W	4000 K	581 lm	189103
12W	2700 K	1140 lm	189111
12W	3000 K	1140 lm	189112
12W	4000 K	1162 lm	189113

700mm





Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	189201
6W	3000 K	570 lm	189202
6W	4000 K	581 lm	189203
12W	2700 K	1140 lm	189211
12W	3000 K	1140 lm	189212
12W	4000 K	1162 lm	189213

LEON 2

LED BOLLARD
Fixed & Adjustable
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Head
Die Cast Aluminium
Diffusers
Frosted polyamide 6.6
Pipe
316L Stainless Steel
Paint
Electrostatic powder

Fixed



Adjustable



CIRCULAR LED

Led : Circular LEDs (6W or 12W)
Voltage : 12-24V External Driver
(12-24 VDC on request)
CRI : >80


350mm

Fixed



Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	270003	270103
6W	3000 K	570 lm	270001	270101
6W	4000 K	581 lm	270002	270102
12W	2700 K	1140 lm	270013	270113
12W	3000 K	1140 lm	270011	270111
12W	4000 K	1162 lm	270012	270112


500mm

Fixed



Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	271003	271103
6W	3000 K	570 lm	271001	271101
6W	4000 K	581 lm	271002	271102
12W	2700 K	1140 lm	271013	271113
12W	3000 K	1140 lm	271011	271111
12W	4000 K	1162 lm	271012	271112


700mm

Fixed




Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	272003	272103
6W	3000 K	570 lm	272001	272101
6W	4000 K	581 lm	272002	272102
12W	2700 K	1140 lm	272013	272113
12W	3000 K	1140 lm	272011	272111
12W	4000 K	1162 lm	272012	272112





For LEON 2

Recessing Tube
Internal Driver
Code No: 953641

Picket
External Driver
Code No: 953642

EMFA



LEON 2 STONE

LED BOLLARD
Fixed & Adjustable
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Head
Die cast aluminium & Stone
Diffusers
Frosted polyamide 6.6
Pipe
316L Stainless Steel
Paint
Electrostatic powder

CIRCULAR LED

Led : Circular LEDs (6W or 12W)
Voltage : 12-24V External Driver
(12-24 VDC on request)
CRI : >80

350mm






Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	280001	280101
6W	3000 K	570 lm	280002	280102
6W	4000 K	581 lm	280003	280103
12W	2700 K	1140 lm	280011	280111
12W	3000 K	1140 lm	280012	280112
12W	4000 K	1162 lm	280013	280113

500mm







Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	281001	281101
6W	3000 K	570 lm	281002	281102
6W	4000 K	581 lm	281003	281103
12W	2700 K	1140 lm	281011	281111
12W	3000 K	1140 lm	281012	281112
12W	4000 K	1162 lm	281013	281113

700mm





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	282001	282101
6W	3000 K	570 lm	282002	282102
6W	4000 K	581 lm	282003	282103
12W	2700 K	1140 lm	282011	282111
12W	3000 K	1140 lm	282012	282112
12W	4000 K	1162 lm	282013	282113



For LEON 2 **Recessing Tube**
Internal Driver
Code No: 953641



Picket
External Driver
Code No: 953642

EMFA

LEON 3

LED ACRYLIC BOLLARD
Fixed & Adjustable
Class I IP65

Available in any of these RAL colors



Head
Die Cast Aluminium
Diffusers
Frosted polyamide 6.6
Pipe
316L Stainless Steel
Paint
Electrostatic powder

Fixed



Adjustable



CIRCULAR LED

Led : Circular LEDs (6W or 12W)
Voltage : 12-24V External Driver
(12-24 VDC on request)
CRI : >80


350mm

Fixed



Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	275003	275103
6W	3000 K	570 lm	275001	275101
6W	4000 K	581 lm	275002	275102


500mm

Fixed



Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	276003	276103
6W	3000 K	570 lm	276001	276101
6W	4000 K	581 lm	276002	276102


700mm

Fixed




Adjustable





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W	2700 K	570 lm	277003	277103
6W	3000 K	570 lm	277001	277101
6W	4000 K	581 lm	277002	277102





For LEON 3

Recessing Tube
Internal Driver
Code No: 953641

Picket
External Driver
Code No: 953642

EMFA



KIBIRA

LED BOLLARDS
IP65


Available in any of these RAL colors



Cover
Die cast aluminium
Body
Die cast aluminium
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
4 mm Tempered Glass (Aluminium Cover)
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6





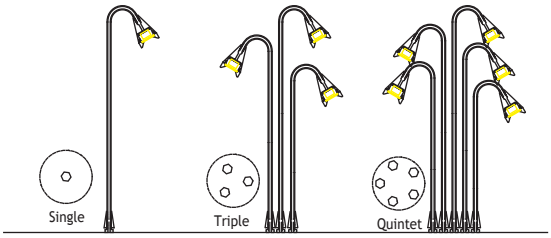


POWER LED

Led : LEDs (1W or 3W)
Voltage : 240 VAC with External driver (12-24 VDC on request)
Diffuser : Tempered Glass
Lens : 10°,25° or 40°

600mm






Power	Kelvin	Real Lumen Output	Code No Single	Triple	Quinet
1W	2700 K	95 lm	191003	192003	193003
1W	3000 K	95 lm	191001	192001	193001
1W	4000 K	97 lm	191002	192002	193002
3W	2700 K	285 lm	191013	192013	193013
3W	3000 K	285 lm	191011	192011	193011
3W	4000 K	290 lm	191012	192012	193012

800mm







Power	Kelvin	Real Lumen Output	Code No Single	Triple	Quinet
1W	2700 K	95 lm	191103	192103	193103
1W	3000 K	95 lm	191101	192101	193101
1W	4000 K	97 lm	191102	192102	193102
3W	2700 K	285 lm	191113	192113	193113
3W	3000 K	285 lm	191111	192111	193111
3W	4000 K	290 lm	191112	192112	193112

1000mm





Power	Kelvin	Real Lumen Output	Code No Single	Triple	Quinet
1W	2700 K	95 lm	191203	192203	193203
1W	3000 K	95 lm	191201	192201	193201
1W	4000 K	97 lm	191202	192202	193202
3W	2700 K	285 lm	191213	192213	193213
3W	3000 K	285 lm	191211	192211	193211
3W	4000 K	290 lm	191212	192212	193212



For Kibira
Recessing Tube
Internal Driver
Code No: 953591



Picket
External Driver
Code No: 953592

EMFA





SARDES

LED BOLLARDS
IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Cover
Die cast aluminium
Body
Die cast aluminium
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
4 mm Tempered Glass (Aluminium Cover)
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6






POWER LED

Led : LEDs (1W or 3W)
Voltage : 240 VAC with External driver (12-24 VDC on request)
Diffuser : Tempered Frosted Glass
Lens : 10°,25° or 40°

600mm






Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	196001
1W	3000 K	95 lm	196002
1W	4000 K	97 lm	196003
3W	2700 K	285 lm	196011
3W	3000 K	285 lm	196012
3W	4000 K	290 lm	196013

800mm







Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	196101
1W	3000 K	95 lm	196102
1W	4000 K	97 lm	196103
3W	2700 K	285 lm	196111
3W	3000 K	285 lm	196112
3W	4000 K	290 lm	196113

1000mm





Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	196201
1W	3000 K	95 lm	196202
1W	4000 K	97 lm	196203
3W	2700 K	285 lm	196211
3W	3000 K	285 lm	196212
3W	4000 K	290 lm	196213





For Sardes
Recessing Tube
Internal Driver
Code No: 953671

Picket
External Driver
Code No: 953672

EMFA



KIBIRA MUSHROOM LED BOLLARD




KIBIRA MUSHROOM

LED BOLLARDS
IP65

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015


Cover
Die cast aluminium
Body
Die cast aluminium
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
4 mm Tempered Glass (Aluminium Cover)
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

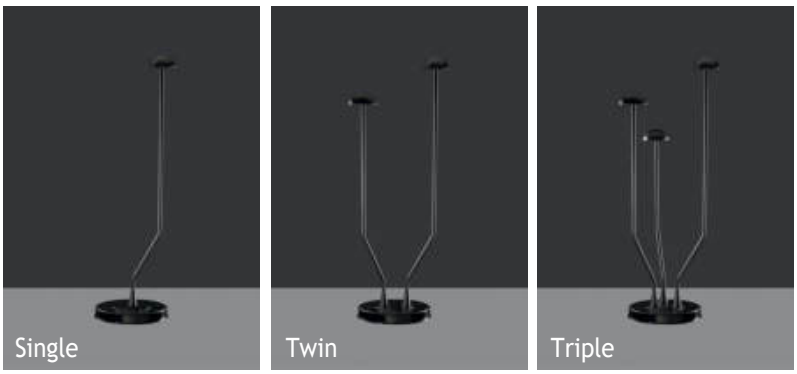

Led : LEDs (3W)
Voltage : 240 VAC with External driver (12-24 VDC on request)
Diffuser : Diffuse Acrylic


600mm






Power	Kelvin	Real Lumen Output	Code No Single	Twin	Triple
3W	2700 K	285 lm	222011	222111	222211
3W	3000 K	285 lm	222012	222112	222212
3W	4000 K	290 lm	222013	222113	222213


800mm







Power	Kelvin	Real Lumen Output	Code No Single	Twin	Triple
3W	2700 K	285 lm	223011	223111	223211
3W	3000 K	285 lm	223012	223112	223212
3W	4000 K	290 lm	223013	223113	223213

1000mm





Power	Kelvin	Real Lumen Output	Code No Single	Twin	Triple
3W	2700 K	285 lm	224011	224111	224211
3W	3000 K	285 lm	224012	224112	224212
3W	4000 K	290 lm	224013	224113	224213





For Kibira
Recessing Tube
Internal Driver
Code No: 953731

Picket
External Driver
Code No: 953732

EMFA

PERINTHOS

ADJUSTABLE LED BOLLARDS IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Cover
Die cast aluminium
Body
Die cast aluminium
die cast aluminium bottom and connection box.
Gaskets
Silicone
Diffusers
4 mm Tempered Glass (Aluminium Cover)
Screws
316L Stainless steel
Glands
2 x PG 13.5
Recessing Tube
Polyamide 6

POWER LED

Led : LEDs (6W or 11W)
Voltage : 240 VAC with External driver (12-24 VDC on request)
Diffuser : Tempered Glass
Lens : 10°,25° or 40°

600mm






Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	198001
6W	3000 K	570 lm	198002
6W	4000 K	581 lm	198003
11W	2700 K	1045 lm	198011
11W	3000 K	1045 lm	198012
11W	4000 K	1065 lm	198013

800mm







Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	198101
6W	3000 K	570 lm	198102
6W	4000 K	581 lm	198103
11W	2700 K	1045 lm	198111
11W	3000 K	1045 lm	198112
11W	4000 K	1065 lm	198113

1000mm





Power	Kelvin	Real Lumen Output	Code No
6W	2700 K	570 lm	198201
6W	3000 K	570 lm	198202
6W	4000 K	581 lm	198203
11W	2700 K	1045 lm	198211
11W	3000 K	1045 lm	198212
11W	4000 K	1065 lm	198213





For Perinthos
Recessing Tube Internal Driver Code No: 953741
Picket External Driver Code No: 953742

EMFA

KIZIKOS

LED BOLLARDS
IP65

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015


Head
Die cast aluminium
Diffusers
Acrylic
Pipe
Stainless steel
Paint
Electrostatic powder



POWER LED


Led : LEDs (1W or 3W)
Voltage : 240 VAC with External driver (12-24 VDC on request)
Diffuser : >80



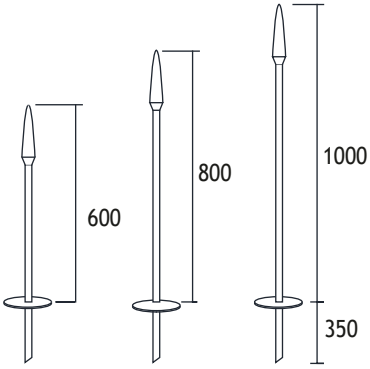

600mm






Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	194003
1W	3000 K	95 lm	194001
1W	4000 K	97 lm	194002
3W	2700 K	285 lm	194013
3W	3000 K	285 lm	194011
3W	4000 K	290 lm	194012

800mm






Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	194103
1W	3000 K	95 lm	194101
1W	4000 K	97 lm	194102
3W	2700 K	285 lm	194113
3W	3000 K	285 lm	194111
3W	4000 K	290 lm	194112

1000mm





Power	Kelvin	Real Lumen Output	Code No
1W	2700 K	95 lm	194203
1W	3000 K	95 lm	194201
1W	4000 K	97 lm	194202
3W	2700 K	285 lm	194213
3W	3000 K	285 lm	194211
3W	4000 K	290 lm	194212



KIZIKOS MINI
LED BOLLARD



KIZIKOS MINI

LED BOLLARDS
IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Head
Die cast aluminium
Diffusers
Acrylic
Pipe
Stainless steel
Paint
Electrostatic powder

Lampholder : Gu4
Led : 1,5W LED LAMP
Voltage : 12 VAC with External driver
Diffuser : Clear or Frosted Acrylic






600mm








Power	Kelvin	Real Lumen Output	Code No Single	Code No Triple
1,5W	2700 K	143 lm	194301	194401
1,5W	3000 K	143 lm	194302	194402
1,5W	4000 K	149 lm	194303	194403

800mm








Power	Kelvin	Real Lumen Output	Code No Single	Code No Triple
1,5W	2700 K	143 lm	195301	195401
1,5W	3000 K	143 lm	195302	195402
1,5W	4000 K	149 lm	195303	195403


1000mm







Power	Kelvin	Real Lumen Output	Code No Single	Code No Triple
1,5W	2700 K	143 lm	196301	196401
1,5W	3000 K	143 lm	196302	196402
1,5W	4000 K	149 lm	196303	196403



For Kizikos **Recessing Tube** Internal Driver Code No: 953751



Picket External Driver Code No: 953752

EMFA



ANI 1 ALUM LED BOLLARD
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Ani Bollard combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The bollard is designed to light pathways, landscapes and open spaces. The Ani bollard gives light only in the downward direction. This avoids any kind of glare and light pollution. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 12W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete or a picket to mount into the earth.


Asym. Glass



Trenched Glass


Milky Glass


Clear Glass



Profile
Aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
4 mm Tempered Glass
Screws
316L Stainless steel
Glands
PG 11

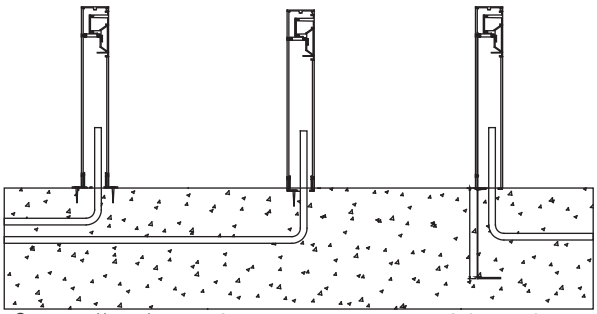


Linear LEDs

Led	: Linear LEDs
Voltage	: 240 VAC with integrated driver (12-24 VDC on request)
Diffuser	: 4 mm Tempered Glass
Beam Angle	: 45° / 60° / 90°
Mac Adam	: 3
CRI	: >80
L.O.R %	: %70

SYMMETRICAL






Power	Kelvin	Real Lumen Output	Beam Angle	450 mm	700 mm	1100 mm
6W	2700 K	570 lm	45° / 60° / 90°	452003	452103	452203
6W	3000 K	570 lm	45° / 60° / 90°	452001	452101	452201
6W	4000 K	581 lm	45° / 60° / 90°	452002	452102	452202
12W	2700 K	1140 lm	45 / 60° / 90°	452013	452113	452213
12W	3000 K	1140 lm	45° / 60° / 90°	452011	452111	452211
12W	4000 K	1162 lm	45° / 60° / 90°	452012	452112	452212

ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Beam Angle	450 mm	700 mm	1100 mm
6W	2700 K	570 lm	45° / 60° / 90°	452503	452603	452703
6W	3000 K	570 lm	45° / 60° / 90°	452501	452601	452701
6W	4000 K	581 lm	45° / 60° / 90°	452502	452602	452702
12W	2700 K	1140 lm	45 / 60° / 90°	452513	452613	452713
12W	3000 K	1140 lm	45° / 60° / 90°	452511	452611	452711
12W	4000 K	1162 lm	45° / 60° / 90°	452512	452612	452712

ANI 1 WOOD LED BOLLARDS
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Real wood is the preferred material of architects for cutting edge designs. Our ANI Wood bollard is made of IROKO wood with an incredibly smooth finish. The Wood Bollard can blend into the architecture of a building and mature together with its surroundings. The simple form of the Wood Bollard is emphasized with the light that comes out from the solid structure.




Body
Wood
Gaskets
Silicone
Diffusers
4 mm Tempered Glass
Screws
316L Stainless steel
Glands
PG 11

Linear LEDs

Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4 mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80
L.O.R % : %70

ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Beam Angle	450 mm	700 mm	1100 mm
6W	2700 K	570 lm	45° / 60° / 90°	465001	465101	465201
6W	3000 K	570 lm	45° / 60° / 90°	465002	465102	465202
6W	4000 K	581 lm	45° / 60° / 90°	465003	465103	465203
12W	2700 K	1140 lm	45 / 60° / 90°	465011	465111	465211
12W	3000 K	1140 lm	45° / 60° / 90°	465012	465112	465212
12W	4000 K	1162 lm	45° / 60° / 90°	465013	465113	465213

ANI 4 ALUM LED BOLLARD
Class I IP55 IK08

Available in any of these RAL colors



Profile
Aluminium
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
4 mm Tempered Glass
Screws
316L Stainless steel
Glands
PG 11


Asym. Glass


Trenched Glass



Milky Glass


Clear Glass




Linear LEDs

Led	: Linear LEDs
Voltage	: 240 VAC with integrated driver (12-24 VDC on request)
Diffuser	: 4 mm Tempered Glass
Beam Angle	: 45° / 60° / 90°
Mac Adam	: 3
CRI	: >80
L.O.R %	: %70

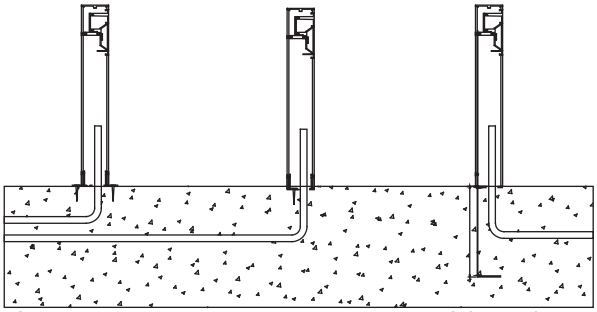

SYMMETRICAL






Power	Kelvin	Real Lumen Output	Beam Angle	450 mm	700 mm	1100 mm
24W	2700 K	2280 lm	45° / 60° / 90°	459003	459103	459203
24W	3000 K	2280 lm	45° / 60° / 90°	459001	459101	459201
24W	4000 K	2320 lm	45° / 60° / 90°	459002	459102	459202
36W	2700 K	3420 lm	45° / 60° / 90°	459013	459113	459213
36W	3000 K	3420 lm	45° / 60° / 90°	459011	459111	459211
36W	4000 K	3520 lm	45° / 60° / 90°	459012	459112	459212

ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Beam Angle	450 mm	700 mm	1100 mm
24W	2700 K	2280 lm	45° / 60° / 90°	459503	459603	459703
24W	3000 K	2280 lm	45° / 60° / 90°	459501	459601	459701
24W	4000 K	2320 lm	45° / 60° / 90°	459502	459602	459702
36W	2700 K	3420 lm	45° / 60° / 90°	459513	459613	459713
36W	3000 K	3420 lm	45° / 60° / 90°	459511	459611	459711
36W	4000 K	3520 lm	45° / 60° / 90°	459512	459612	459712

BELLA

LED BOLLARDS
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Head
Die cast aluminium
Diffuser
Tempered Glass 4 mm
Pipe
Extrusion aluminium
Base
Polyamide (black color)
Paint
Electrostatic powder



LINEAR LEDS

Voltage : 240V AC with integrated driver (12V DC or 24V DC on request)
Diffuser : Clear Glass 4 mm
Cable : Potted 5 m 3x0,75 H03 VV-F




Socket can be installed optionally
953761



ONE WAY ASYMMETRICAL






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	149103
3W	3000 K	285 lm	149101
3W	5000 K	306 lm	149102

TWO WAY ASYMMETRICAL






Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	149113
3W	3000 K	285 lm	149111
3W	5000 K	306 lm	149112

TWO WAY ASYMMETRICAL + SYMMETRICAL





Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	149123
3W	3000 K	285 lm	149121
3W	5000 K	306 lm	149122

EMFA

L TYPE

LED BOLLARDS
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

3W or 6W COB LED
Head
Die cast aluminium
Diffuser
Tempered Glass 4 mm
Pipe
Extrusion aluminium
Base
Die cast aluminium
Paint
Electrostatic powder






COB LED

Voltage : 240V AC with integrated driver (12V DC or 24V DC on request)
Diffuser : Clear Glass 4 mm
Cable : Potted 5 m 3x0,75 H03 VV-F

COB LED BOLLARDS





Power	Kelvin	Real Lumen Output	40 cm	80 cm
3W COB LED	2700 K	285 lm	125003	125201
3W COB LED	3000 K	285 lm	125001	125202
3W COB LED	5000 K	306 lm	125002	125203
6W COB LED	2700 K	570 lm	125011	125103
6W COB LED	3000 K	570 lm	125012	125101
6W COB LED	5000 K	612 lm	125013	125102


BETON LED BOLLARDS
Class I IP67 IK10

Exposed concrete is the preferred material of architects for cutting edge designs. Our BETON bollard is made of heavy duty concrete with an incredibly smooth finish. The BETON can blend into the architecture of a building and mature together with its surroundings. The simple form of the BETON is emphasized with the light that comes out from the solid structure.



Asymmetrical

Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80
L.O.R % : %70

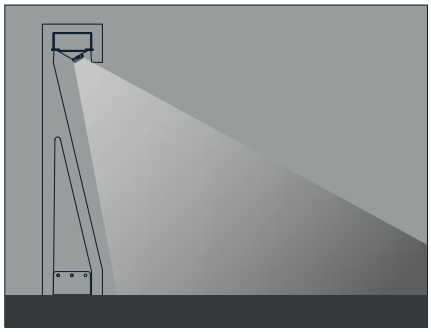






LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.





Power	Kelvin	Real Lumen Output	Lens	Code No
6W	2700 K	570 lm	45°,60°,90°	190003
6W	3000 K	570 lm	45°,60°,90°	190001
6W	4500 K	581 lm	45°,60°,90°	190002
12W	2700 K	1162 lm	45°,60°,90°	190013
12W	3000 K	1162 lm	45°,60°,90°	190011
12W	4500 K	1278 lm	45°,60°,90°	190012



For BETON
Anchor
Code No: 953716



BETON L TYPE LED BOLLARDS
Class I IP67 IK10

Exposed concrete is the preferred material of architects for cutting edge designs. Our BETON bollard is made of heavy duty concrete with an incredibly smooth finish. The BETON can blend into the architecture of a building and mature together with its surroundings. The simple form of the BETON is emphasized with the light that comes out from the solid structure.






Asymmetrical

Led : LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4mm Tempered Glass
Beam Angle : Asymmetrical
Mac Adam : 3
CRI : >80
L.O.R % : %70





Power	Kelvin	Real Lumen Output	Code No
10W	2700 K	950 lm	190101
10W	3000 K	950 lm	190102
10W	4500 K	968 lm	190103




For BETON **Anchor** Code No: 953771

EMFA

BETON SQUARE LED BOLLARDS
Class I IP67 IK10

Exposed concrete is the preferred material of architects for cutting edge designs. Our BETON bollard is made of heavy duty concrete with an incredibly smooth finish. The BETON can blend into the architecture of a building and mature together with its surroundings. The simple form of the BETON is emphasized with the light that comes out from the solid structure.

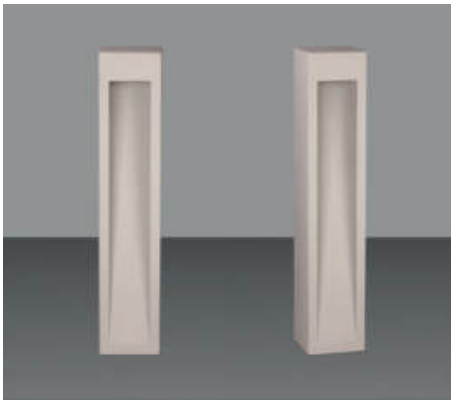




Asymmetrical


Led : LEDs
Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : 4mm Tempered Glass
Beam Angle : Asymmetrical
Mac Adam : 3
CRI : >80
L.O.R % : %70





Power	Kelvin	Real Lumen Output	Code No
10W	2700 K	950 lm	190201
10W	3000 K	950 lm	190202
10W	4500 K	968 lm	190203





Power	Kelvin	Real Lumen Output	Code No
10W	2700 K	950 lm	190301
10W	3000 K	950 lm	190302
10W	4500 K	968 lm	190303



For BETON **Anchor** Code No: 953771

ODEON BOLLARD
Class I IP67 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Odeon Bollard combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The bollard is designed to light pathways, landscapes and open spaces. The unit comes with 5 different options of heads depending on how much light is required and into which direction: with one head, two adjacent heads, two opposite heads, three heads, or four heads. The head and pipe are connected by a hidden screw within the pipe. One head contains 20 medium-power LEDs consuming 6W and providing over 500lm light output. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete or a picket to mount into the earth.



Head
Die cast aluminium
Diffusers
Frosted polyamide 6.6
Pipe
Extrusion aluminium
Paint
Electrostatic powder



"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

ODEON

BOLLARD
Class I IP67 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



POWER LED or CPB LED


Led : Medium power LEDs


Voltage : 240 VAC with External driver (12-24 VDC on request)

Diffuser : Polyamide 6.6

Mono










Power	Kelvin	Real Lumen Output	Code No
1x 6W	2700 K	1x 570 lm	178103
1x 6W	3000 K	1x 570 lm	178101
1x 6W	4000 K	1x 585 lm	178102

Duo 1-way









Power	Kelvin	Real Lumen Output	Code No
2x 6W	2700 K	2x 570 lm	178113
2x 6W	3000 K	2x 570 lm	178111
2x 6W	4000 K	2x 585 lm	178112

Duo 2-way









Power	Kelvin	Real Lumen Output	Code No
2x 6W	2700 K	2x 570 lm	178123
2x 6W	3000 K	2x 570 lm	178121
2x 6W	4000 K	2x 585 lm	178122

Trio









Power	Kelvin	Real Lumen Output	Code No
3x 6W	2700 K	3x 570 lm	178133
3x 6W	3000 K	3x 570 lm	178131
3x 6W	4000 K	3x 585 lm	178132

Multi







Power	Kelvin	Real Lumen Output	Code No
4x 6W	2700 K	4x 570 lm	178143
4x 6W	3000 K	4x 570 lm	178141
4x 6W	4000 K	4x 585 lm	178142

EMFA

DION

WALL AND GROUND BOLLARDS
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Dion series combines a die-cast aluminium head with an extrusion aluminium pipe to provide a sturdy, outdoor bollard. The bollards are designed to light pathways, landscapes and open spaces. The unit comes with 5 different heads for various light outputs and applications. A screwless bayonet lock system allows for easy dismounting of the head. The unit comes in 4 sizes: 300mm, 450mm, 700mm, and 1100mm, as well as with 3 lamp options: LED, Fluorescent, Metal Halide. In combination with the fluorescent lamp, an optional LED pilot lamp is available to light the bollard when the primary light source is off to continue marking a path while saving energy. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete.

Head
Die cast aluminium
With Screwless lock system
(Electrical lock on request)
Outer Protective Grill
Die cast aluminium
Diffuser
Frosted polycarbonate
Pipe
Extrusion aluminium
Paint
Electrostatic powder





Accessories:

2 x LED Pilot Lamps
Lit when main Light Source is turned off. Available in:

Code No 956101 - Blue
Code No 956102 - Red
Code No 956103 - Yellow
Code No 956104 - Green

Code Number should be indicated along with bollard code number

















DION LED BOLLARDS IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

LINEAR LED or FLUO


Led : Medium power LEDs

Voltage : 240 VAC with integrated driver (12-24 VDC on request)

Diffuser : Polyamide 6.6

DION 1






Power	30 cm	45 cm	70 cm	110 cm
Led Lamp E27	143101	143201	143301	143401
METAL HALIDE 35W		143221	143321	143421
LINEAR LED 12W		143231	143341	143331

DION 2






Power	30 cm	45 cm	70 cm	110 cm
Led Lamp E27	144101	144201	144301	144401
METAL HALIDE 35W		144221	144321	144421
LINEAR LED 12W		144231	144341	144331

DION 3






Power	30 cm	45 cm	70 cm	110 cm
Led Lamp E27	145101	145201	145301	145401
METAL HALIDE 35W		145221	145321	145421
LINEAR LED 12W		145231	145341	145331

DION 4







Power	30 cm	45 cm	70 cm	110 cm
Led Lamp E27	146101	146201	146301	146401
METAL HALIDE 35W		146221	146321	146421
LINEAR LED 12W		146231	146341	146331

DION 5






Power	30 cm	45 cm	70 cm	110 cm
Led Lamp E27	147101	147201	147301	147401
METAL HALIDE 35W		147221	147321	147421
LINEAR LED 12W		147231	147341	147331



For DION

Anchor
Code No: 955201

EMFA

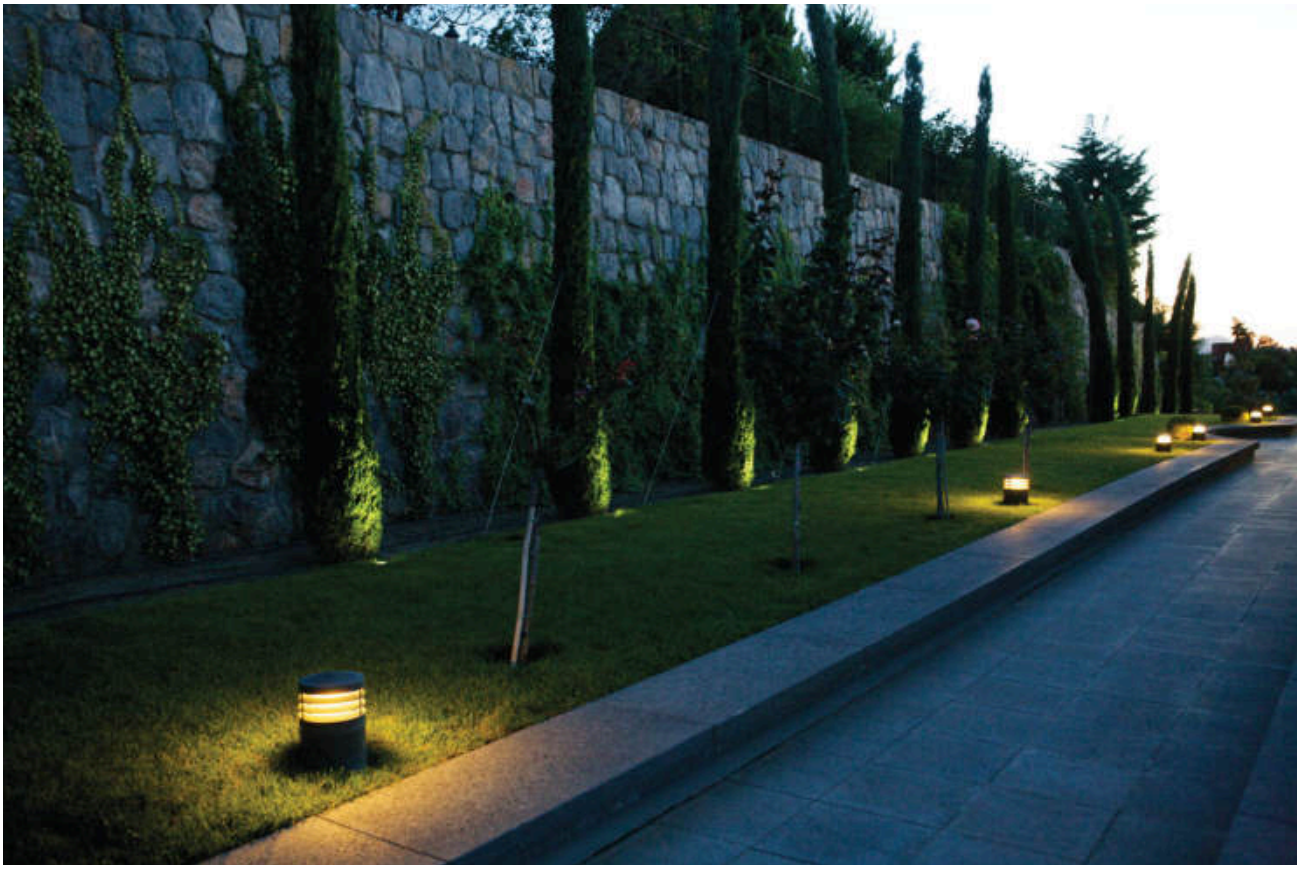



MILET

BOLLARD
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



The Milet Indirect series consists of an on-wall fixture and a bollard using LED or LED lamp. The fixtures are made of a combination of a die cast aluminium head and an aluminium pipe painted with electrostatic powder paint. The wall fixture allows for a custom made sign showing room numbers or names. For the LED versions, a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. For the LED lamp versions, an IP connection box is provided to allow for a secure connection of the on-site cable.


Cover
Die cast aluminium
Paint
Black or grey electrostatic powder
Pipe
Extrusion aluminium
Connection
IP connection box
Gaskets
Silicone
Diffusers
Polycarbonate

DOM LED or LED LAMP

Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Lens : 40°
Diffuser : Polycarbonate
Cable : Potted 5 m 3x0,75 H03 VV-F

DOM LED






Power	Kelvin	300mm	550mm
11W	3000 K	291121	292221

LED LAMP





Power	Kelvin	300mm	550mm
Led Lamp	G9	291101	291201

EMFA



POLARIS

ALUMINIUM BOLLARDS
Class I IP43 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

FLUO
Bottom Base
Polyamide (black color)
Outer Grill
Die cast aluminium
Pipe
Extrusion aluminium
Paint
Electrostatic powder
Diffuser
Polycarbonate or
Glass (incandescent and mercury lamps)





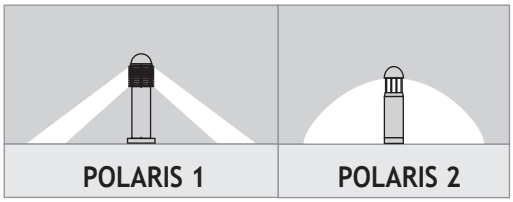


DOM LED or FLUO


Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Lens : 40°
Diffuser : Polycarbonate
Cable : Potted 5 m 3x0,75 H03 VV-F

POLARIS 1






Power	Lampholder	45 cm	70 cm	110 cm
Led Lamp	E27	124101	124201	124301




For POLARIS 1 **Anchor**
Code No: 953611

POLARIS 2





Power	Lampholder	45 cm	70 cm	110 cm
Led Lamp	E27	126101	126201	126301



For POLARIS 2 **Anchor**
Code No: 953621

EMFA

LARA

ACRYLIC BOLLARDS
Class I IP55

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


FLUO
LARA (35/60 cm)

Lampholder : G24 q-1
Reflector : -
Diffuser : Acrylic Pipe
Transformer : Electronic









Power	Lampholder	35 cm	60 cm
COMPACT FLUO 13W	G24 q-1	294101	294201







EMFA

BELKIS 1

BOLLARDS
Class I IP55

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


FLUO

Lampholder : E27 / G9
Reflector : -
Diffuser : Acrylic Pipe
Transformer : Electronic



600mm






Power	Lampholder	Code No
Led Lamp	G9	292201

1100mm





Power	Lampholder	Code No
Led Lamp	E27	292301


SELÇUKLU KONGRE MERKEZİ



GOREME

LED BOLLARDS
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Bottom Base
Polyamide (black color)
Inner Grill
Polycarbonate
Pipe
Extrusion aluminium
Paint
Electrostatic powder
Diffuser
Polycarbonate
Anchor






LINEAR LED

Voltage : 240 V AC with integrated driver (24V AC or DC on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

GOREME 1






Power	Kelvin	Real Lumen Output	45 cm	70 cm	110 cm
12W	2700 K	1140 lm	127003	127103	127203
12W	3000 K	1140 lm	127001	127101	127201
12W	4000 K	1162 lm	127002	127102	127202

GOREME 2





Power	Kelvin	Real Lumen Output	45 cm	70 cm	110 cm
12W	2700 K	1140 lm	127503	127603	127703
12W	3000 K	1140 lm	127501	127601	127701
12W	4000 K	1162 lm	127502	127602	127702
24W	2700 K	2280 lm	127513	127613	127713
24W	3000 K	2280 lm	127511	127611	127711
24W	4000 K	2320 lm	127512	127612	127712

BOW

GARDEN FIXTURE
Class I IP44 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Glass reinforced polyester
Diffuser
Acrylic
Reflector
Anodized aluminium
Bracket
Stainless Steel




LINEAR LED or FLUO

Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

LINEAR LED





Power	Kelvin	Real Lumen Output	Code No
2x3W	2700 K	570 lm	129122
2x3W	3000 K	570 lm	129121



EMFA

RAMBO


VANDALPROOF BOLLARD
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Head
Die cast aluminium
Pipe
Steel
Paint
Electrostatic powder paint
Diffuser
Polycarbonate
Anchor
Die cast iron



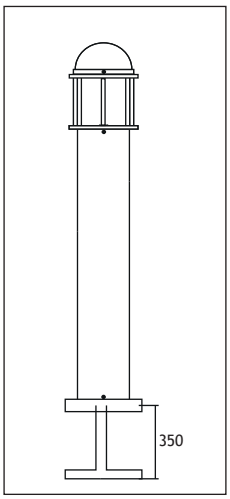




LINEAR LED or FLUO

Voltage : 240V A.C with integrated driver (24V AC or DC on request)


Cable : Potted 5 m 3x0,75 H03 VV-F





Power	Lampholder	Code No
Led Lamp	E27	128101





Power	Kelvin	Real Lumen Output	Code No
LINEAR LED 12W	2700 K	1140 lm	128142
LINEAR LED 12W	3000 K	1140 lm	128141


ODTÜ

MUSHROOM

GARDEN FIXTURE
Class I IP67 IK10


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


Top Cover
Aluminium
Inner Body
Die cast aluminium
Diffuser
Tempered Glass
Gaskets
Silicone
Lampholder: Gu10







Power	Lampholder	Code No
Led Lamp	Gu10	129501



For Mushroom **Picket**
Code No: 953501



EMFA

Stainless Steel Underwater



ATLANTIS UNDERWATER LED FIXTURES
Class III IP68 IK10

The Atlantis Underwater series is specially designed to light pools, fountains and water features with high power LED light. The series is made of 316L stainless steel to withstand salt water and chlorine. Standard finish is polished stainless steel to avoid collection of dirt and algae, but a brushed finish is also possible. The series comes as recessed, surface mount or spots. The spots are heavy duty with stainless steel brackets for sturdy fixing. The bodies are filled with cast resin and a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The low voltage electronic LED driver is housed in the base of the fixture. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber or RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.




Frame
316L Stainless Steel
Body
316L Stainless Steel
Recessing Tube
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
Stainless Steel
Mounting Brackets
316L Stainless Steel

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.


ATLANTIS 5



ATLANTIS 2


MIRA ATLANTIS RECESSED


ATLANTIS 2



INOX 1


MIRA ATLANTIS SURFACE MOUNTED



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

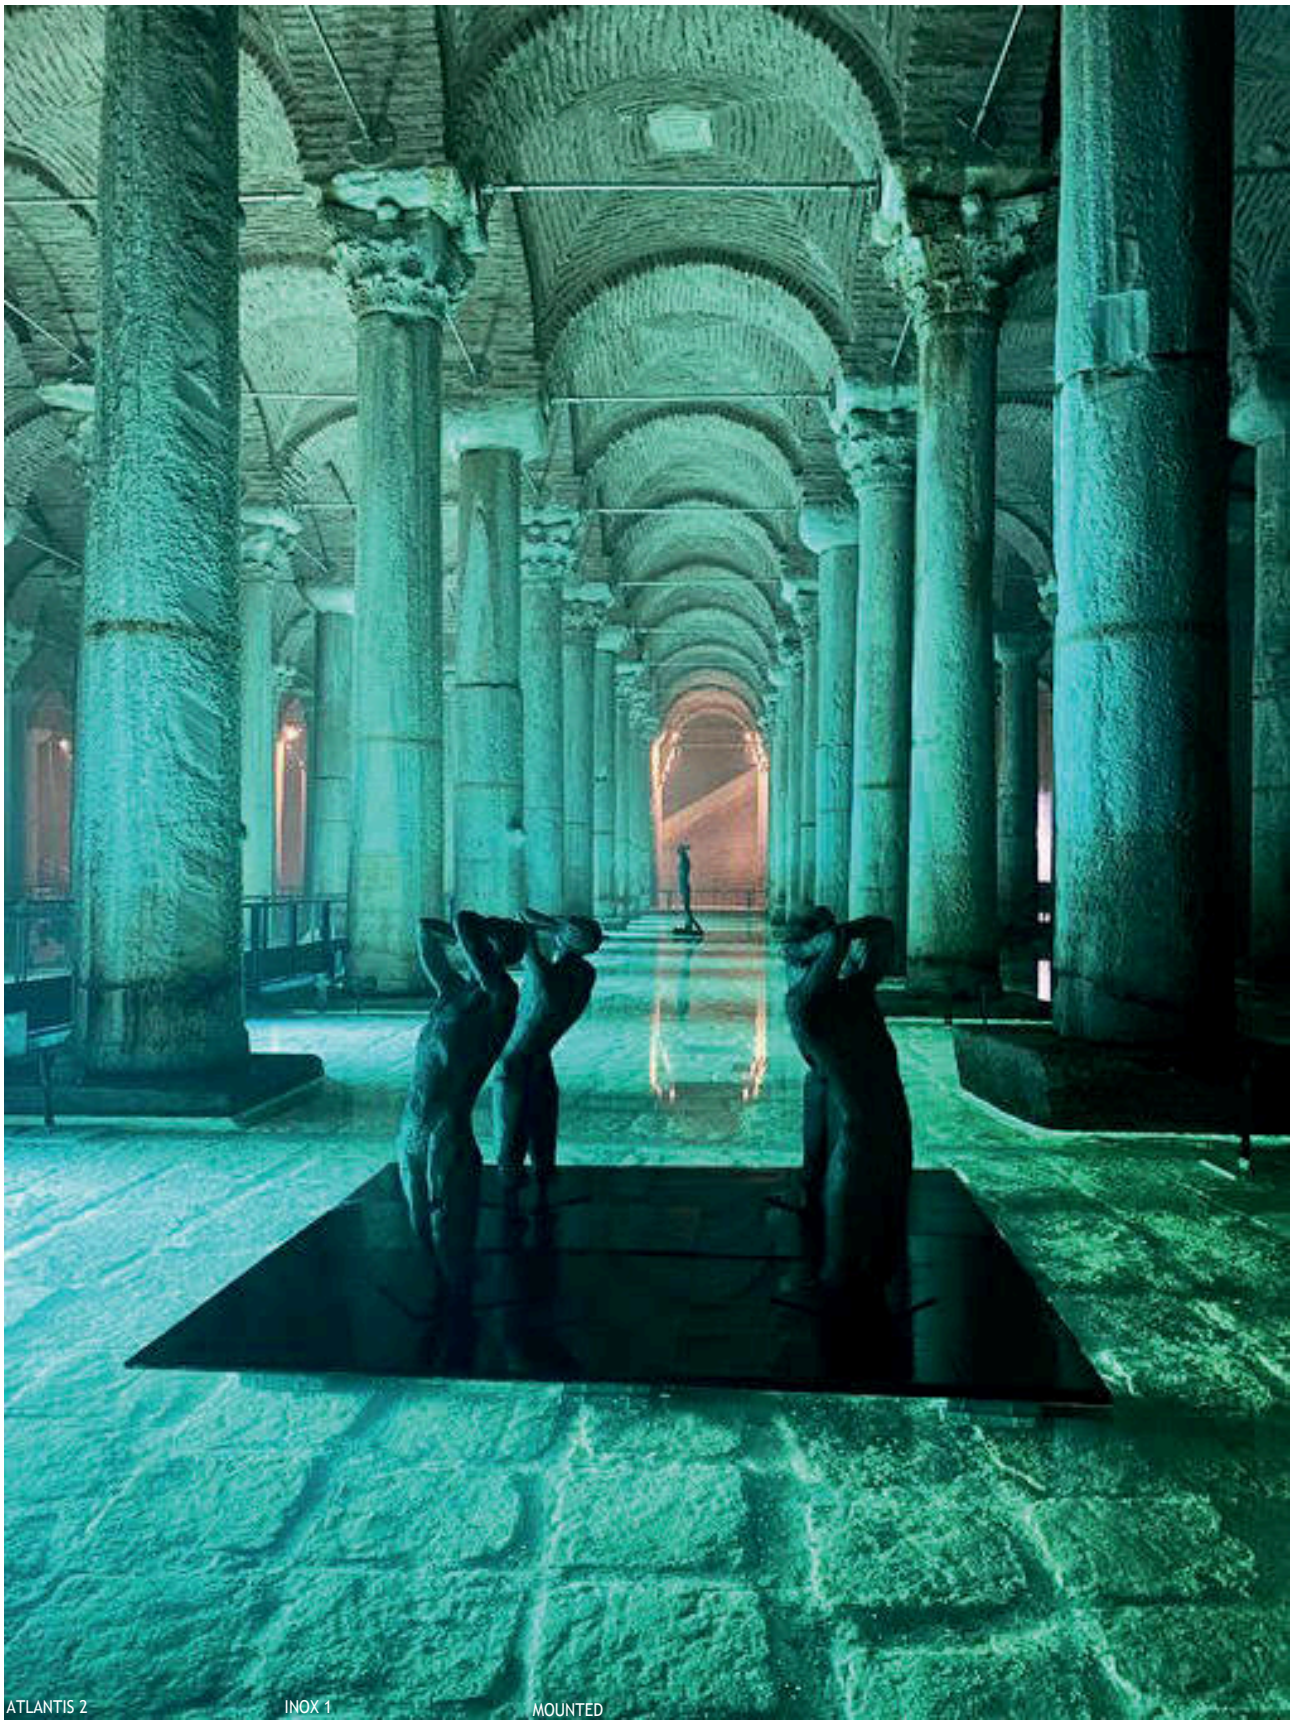

ATLANTIS 2 INOX 1 MOUNTED

ATLANTIS

UNDERWATER RECESSED LED FIXTURES
Class III IP68 IK10







POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)

Lens : 10°, 25°, 40°


Diffuser : 8 mm Clear Glass (Frosted Glass on request)

Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	421102	421112
1W LED	3000 K	95 lm	10°,25°,40°	421101	421111
1W LED	4500 K	97 lm	10°,25°,40°	421106	421116
1W LED	6000 K	99 lm	10°,25°,40°	421107	421117
3W LED	2700 K	285 lm	10°,25°,40°	421204	421214
3W LED	3000 K	285 lm	10°,25°,40°	421201	421211
3W LED	4500 K	290 lm	10°,25°,40°	421202	421212
3W LED	6000 K	296 lm	10°,25°,40°	421203	421213

ATLANTIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	421122	421132
3W LED	3000 K	285 lm	10°,25°,40°	421121	421131
3W LED	4500 K	290 lm	10°,25°,40°	421126	421136
3W LED	6000 K	296 lm	10°,25°,40°	421127	421137
9W LED	2700 K	855 lm	10°,25°,40°	421304	421314
9W LED	3000 K	855 lm	10°,25°,40°	421301	421311
9W LED	4500 K	872 lm	10°,25°,40°	421302	421312
9W LED	6000 K	890 lm	10°,25°,40°	421303	421313
9W LED	RGB		10°,25°,40°	421141	421151

ATLANTIS 5





Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	405322	405332
9W LED	3000 K	855 lm	10°,25°,40°	405321	405331
9W LED	4500 K	872 lm	10°,25°,40°	405326	405336
9W LED	6000 K	890 lm	10°,25°,40°	405327	405337
27W LED	2700 K	2560 lm	10°,25°,40°	421824	421834
27W LED	3000 K	2560 lm	10°,25°,40°	421821	421831
27W LED	4500 K	2610 lm	10°,25°,40°	421822	421832
27W LED	6000 K	2670 lm	10°,25°,40°	421823	421833
27W LED	RGB		10°,25°,40°	405341	405351

EMFA


ATLANTIS 18 SWIMMING POOL LED FIXTURE
Class III IP68 IK10

Body
316L Stainless Steel Pipe
Frame
4 mm Polished Stainless Steel
Screws
316L Stainless Steel
Diffuser
8 mm Clear Glass
Gasket
Silicone
Remote Gear Box
240 VAC Class I
Control by DMX, remote control or push button




Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 10 m 4x0,75 H03 VV-F






Power	Kelvin	Real Lumen Output	Lens	Code No
18W LED	2700 K	1710 lm	10°,25°,40°	408001
18W LED	3000 K	1710 lm	10°,25°,40°	408002
18W LED	4500 K	1744 lm	10°,25°,40°	408003
18W LED	6000 K	1779 lm	10°,25°,40°	408004



CODE NO 953702

SLIM IP 65 CONTROL BOX (For Max. 1 RGBox)
GLASS REINFORCED POLYESTER BODY

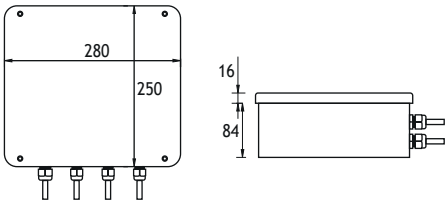

CODE NO 953703

WIDE IP 65 CONTROL BOX (For Max. 3 RGBoxes)
GLASS REINFORCED POLYESTER BODY

ATLANTIS 27


SWIMMING POOL LED FIXTURE
Class III IP68 IK10

Body
316L Stainless Steel Pipe
Frame
4 mm Polished Stainless Steel
Screws
316L Stainless Steel
Diffuser
8 mm Clear Glass
Gasket
Silicone
Remote Gear Box
240 VAC Class I
Control by DMX, remote control or push button




Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 10 m 4x0,75 H03 VV-F






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	405472
6W LED	3000 K	570 lm	10°,25°,40°	405471
6W LED	4500 K	581 lm	10°,25°,40°	405476
6W LED	6000 K	593 lm	10°,25°,40°	405477
9W LED	2700 K	855 lm	10°,25°,40°	405482
9W LED	3000 K	855 lm	10°,25°,40°	405481
9W LED	4500 K	872 lm	10°,25°,40°	405486
9W LED	6000 K	890 lm	10°,25°,40°	405487
18W LED	2700 K	1710 lm	10°,25°,40°	421704
18W LED	3000 K	1710 lm	10°,25°,40°	421701
18W LED	4500 K	1744 lm	10°,25°,40°	421702
18W LED	6000 K	1779 lm	10°,25°,40°	421703
27W LED	2700 K	2560 lm	10°,25°,40°	421714
27W LED	3000 K	2560 lm	10°,25°,40°	421711
27W LED	4500 K	2610 lm	10°,25°,40°	421712
27W LED	6000 K	2670 lm	10°,25°,40°	421713
27W LED	RGB		10°,25°,40°	425311



CODE NO 953702


SLIM IP 65 CONTROL BOX (For Max. 1 RGBox)
GLASS REINFORCED POLYESTER BODY

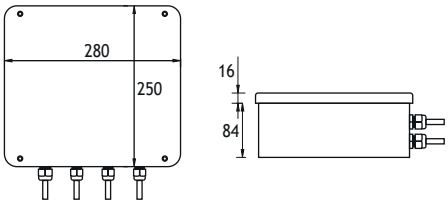

CODE NO 953703

WIDE IP 65 CONTROL BOX (For Max. 3 RGBoxes)
GLASS REINFORCED POLYESTER BODY


EMFA

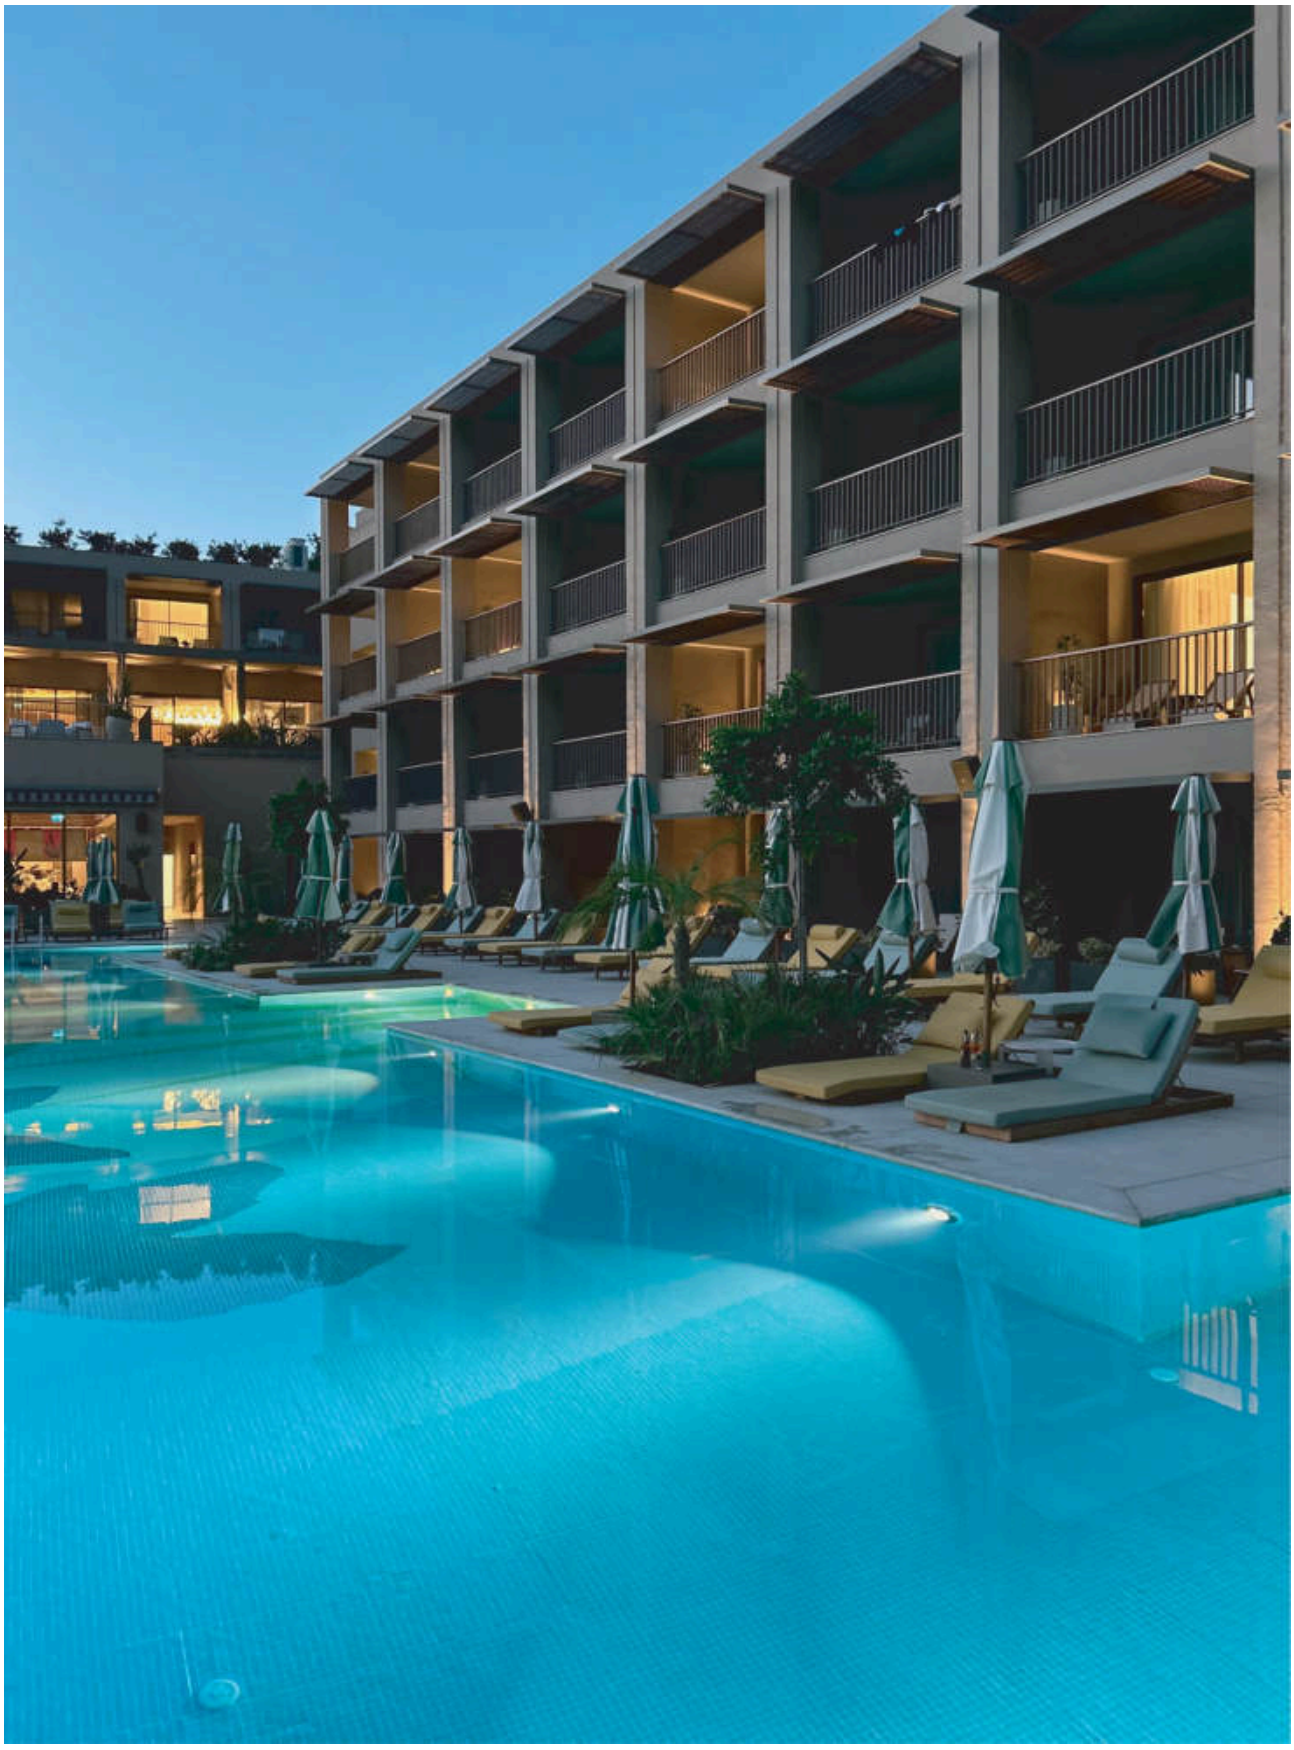

ATLANTIS

UNDERWATER RECESSED MOUNTED LED FIXTURES
Class III IP68 IK10










POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	405362
1W LED	3000 K	95 lm	10°,25°,40°	405361
1W LED	4500 K	97 lm	10°,25°,40°	405366
1W LED	6000 K	99 lm	10°,25°,40°	405367
3W LED	2700 K	285 lm	10°,25°,40°	421324
3W LED	3000 K	285 lm	10°,25°,40°	421321
3W LED	4500 K	290 lm	10°,25°,40°	421322
3W LED	6000 K	296 lm	10°,25°,40°	421323

ATLANTIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	405372
3W LED	3000 K	285 lm	10°,25°,40°	405371
3W LED	4500 K	290 lm	10°,25°,40°	405376
3W LED	6000 K	296 lm	10°,25°,40°	405377
9W LED	2700 K	855 lm	10°,25°,40°	421334
9W LED	3000 K	855 lm	10°,25°,40°	421331
9W LED	4500 K	872 lm	10°,25°,40°	421332
9W LED	6000 K	890 lm	10°,25°,40°	421333
9W LED	RGB		10°,25°,40°	405201

ATLANTIS 5





Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	405392
9W LED	3000 K	855 lm	10°,25°,40°	405391
9W LED	4500 K	872 lm	10°,25°,40°	405396
9W LED	6000 K	890 lm	10°,25°,40°	405397
27W LED	2700 K	2560 lm	10°,25°,40°	421854
27W LED	3000 K	2560 lm	10°,25°,40°	421851
27W LED	4500 K	2610 lm	10°,25°,40°	421852
27W LED	6000 K	2670 lm	10°,25°,40°	421853
27W LED	RGB		10°,25°,40°	405411

EMFA

ATLANTIS

UNDERWATER LED SPOT
Class III IP68 IK10










POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	405422
1W LED	3000 K	95 lm	10°,25°,40°	405421
1W LED	4500 K	97 lm	10°,25°,40°	405426
1W LED	6000 K	99 lm	10°,25°,40°	405427
3W LED	2700 K	285 lm	10°,25°,40°	405244
3W LED	3000 K	285 lm	10°,25°,40°	405241
3W LED	4500 K	290 lm	10°,25°,40°	405242
3W LED	6000 K	296 lm	10°,25°,40°	405243

ATLANTIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	405254
3W LED	3000 K	285 lm	10°,25°,40°	405251
3W LED	4500 K	290 lm	10°,25°,40°	405252
3W LED	6000 K	296 lm	10°,25°,40°	405253
9W LED	2700 K	855 lm	10°,25°,40°	421344
9W LED	3000 K	855 lm	10°,25°,40°	421341
9W LED	4500 K	872 lm	10°,25°,40°	421342
9W LED	6000 K	890 lm	10°,25°,40°	421343
9W LED	RGB		10°,25°,40°	405431

ATLANTIS 5





Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	405452
9W LED	3000 K	855 lm	10°,25°,40°	405451
9W LED	4500 K	872 lm	10°,25°,40°	405456
9W LED	6000 K	890 lm	10°,25°,40°	405457
27W LED	2700 K	2560 lm	10°,25°,40°	421874
27W LED	3000 K	2560 lm	10°,25°,40°	421871
27W LED	4500 K	2610 lm	10°,25°,40°	421872
27W LED	6000 K	2670 lm	10°,25°,40°	421873
27W LED	RGB		10°,25°,40°	405461


INOX

UNDERWATER LED SPOT
Class III IP68 IK10

EMFA's Inox 1 Underwater spot is completely made of solid 316L stainless steel to withstand salt water and chlorine. The spot is specially designed to light fountains and water features. A special factory sealed cable is used to avoid any ingress of water. Standard finish is polished stainless steel to avoid collection of dirt and algae, but a brushed finish is also possible.



Body
316L marine grade stainless steel
Frame
316L marine grade stainless steel
Diffuser
Tempered Glass
Gaskets
Silicone
Screws
316L marine grade stainless steel
Gland
316L marine grade stainless steel



Stainless Steel Recessing Tube


Lampholder : Gu 5.3
Reflector : -
Diffuser : 8 mm Tempered Glass

Transformer is not included.

Remote transformer should be used.


STEP MOUNTED






Power	Lampholder	Code No Round	Square
12V Led Lamp	Gu 5.3	134211	134201

FLUSH MOUNTED

Power	Lampholder	Code No
12V Led Lamp	Gu 5.3	134221

SPOT

Power	Lampholder	Code No
12V Led Lamp	Gu 5.3	134101

EMFA


MIRA ATLANTIS

UNDERWATER RECESSED LED FIXTURES
Class III IP68 IK10


The Mira Atlantis Underwater series brings together the rectangular LED fixture called Mira with the underwater feature of the Atlantis. Engineered completely from marine grade stainless steel, 316L, this range is designed to light pools, fountains and water features with efficient LED lighting. Standard finish is polished stainless steel to avoid collection of dirt and algae, but a brushed finish is also available on request. The series comes as recessed or surface mount. The surface mounted version has heavy-duty stainless steel adjustable brackets for sturdy fixing. The bodies are filled with cast resin and a specially developed potted power cable is used to effectively bond with the cast resin and stop any water ingress. The low voltage electronic LED driver is housed in the base of the fixture. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber or RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired underwater light effect.



Cover
316L Stainless steel
Outer Body
316L Stainless steel
Body
Die cast aluminium
Diffusers
12 mm Tempered Glass
Gaskets
Silicone
Screws
316L Stainless steel
Recessing Box
Stainless steel



“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

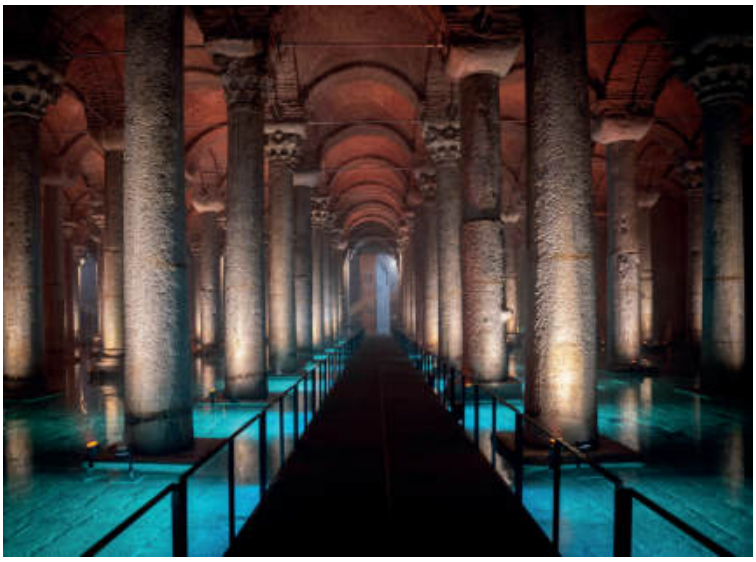

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

MIRA ATLANTIS

UNDERWATER RECESSED LED FIXTURES
Class III IP68 IK10








POWER LED

Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : Clear Glass 12 mm (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

MIRA ATLANTIS 1




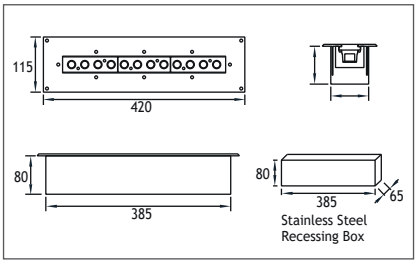

Power	Kelvin	Real Lumen Output	Lens	Code No
12W LED	2700 K	1140 lm	10°,25°,40°	429004
12W LED	3000 K	1140 lm	10°,25°,40°	429001
12W LED	4500 K	1162 lm	10°,25°,40°	429002
12W LED	6000 K	1185 lm	10°,25°,40°	429003
12W LED	RGB		10°,25°,40°	429011

MIRA ATLANTIS 2 15°+15°+0° ASYMMETRICAL




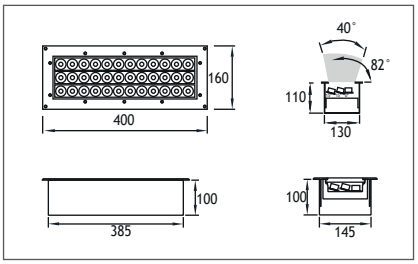

Power	Kelvin	Real Lumen Output	Lens	Code No
12W LED	2700 K	1140 lm	10°,25°,40°	429044
12W LED	3000 K	1140 lm	10°,25°,40°	429041
12W LED	4500 K	1162 lm	10°,25°,40°	429042
12W LED	6000 K	1185 lm	10°,25°,40°	429043
12W LED	RGB		10°,25°,40°	429051

MIRA ATLANTIS 2 15°+15°+0° ASYMMETRICAL



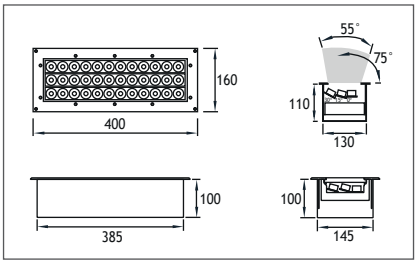

Power	Kelvin	Real Lumen Output	Lens	Code No
36W LED	2700 K	3420 lm	10°,25°,40°	429064
36W LED	3000 K	3420 lm	10°,25°,40°	429061
36W LED	4500 K	3520 lm	10°,25°,40°	429062
36W LED	6000 K	3557 lm	10°,25°,40°	429063
36W LED	RGB		10°,25°,40°	429071

EMFA

MIRA ATLANTIS

UNDERWATER SURFACE MOUNTED LED FIXTURES
Class III IP68 IK10






POWER LED

Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : Clear Glass 12 mm (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

MIRA ATLANTIS 1 SURFACE MOUNTED




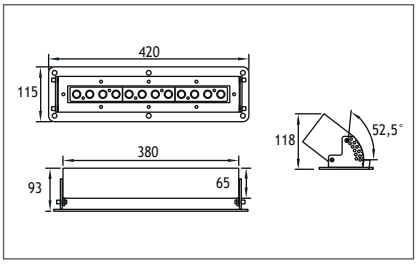


Power	Kelvin	Real Lumen Output	Lens	Code No
12W LED	2700 K	1140 lm	10°,25°,40°	429024
12W LED	3000 K	1140 lm	10°,25°,40°	429021
12W LED	4500 K	1162 lm	10°,25°,40°	429022
12W LED	6000 K	1185 lm	10°,25°,40°	429023
12W LED	RGB		10°,25°,40°	429031

MIRA ATLANTIS 2 SURFACE MOUNTED



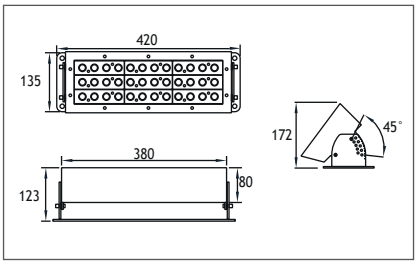

Power	Kelvin	Real Lumen Output	Lens	Code No
36W LED	2700 K	3420 lm	10°,25°,40°	429084
36W LED	3000 K	3420 lm	10°,25°,40°	429081
36W LED	4500 K	3520 lm	10°,25°,40°	429082
36W LED	6000 K	3557 lm	10°,25°,40°	429083
36W LED	RGB		10°,25°,40°	429091

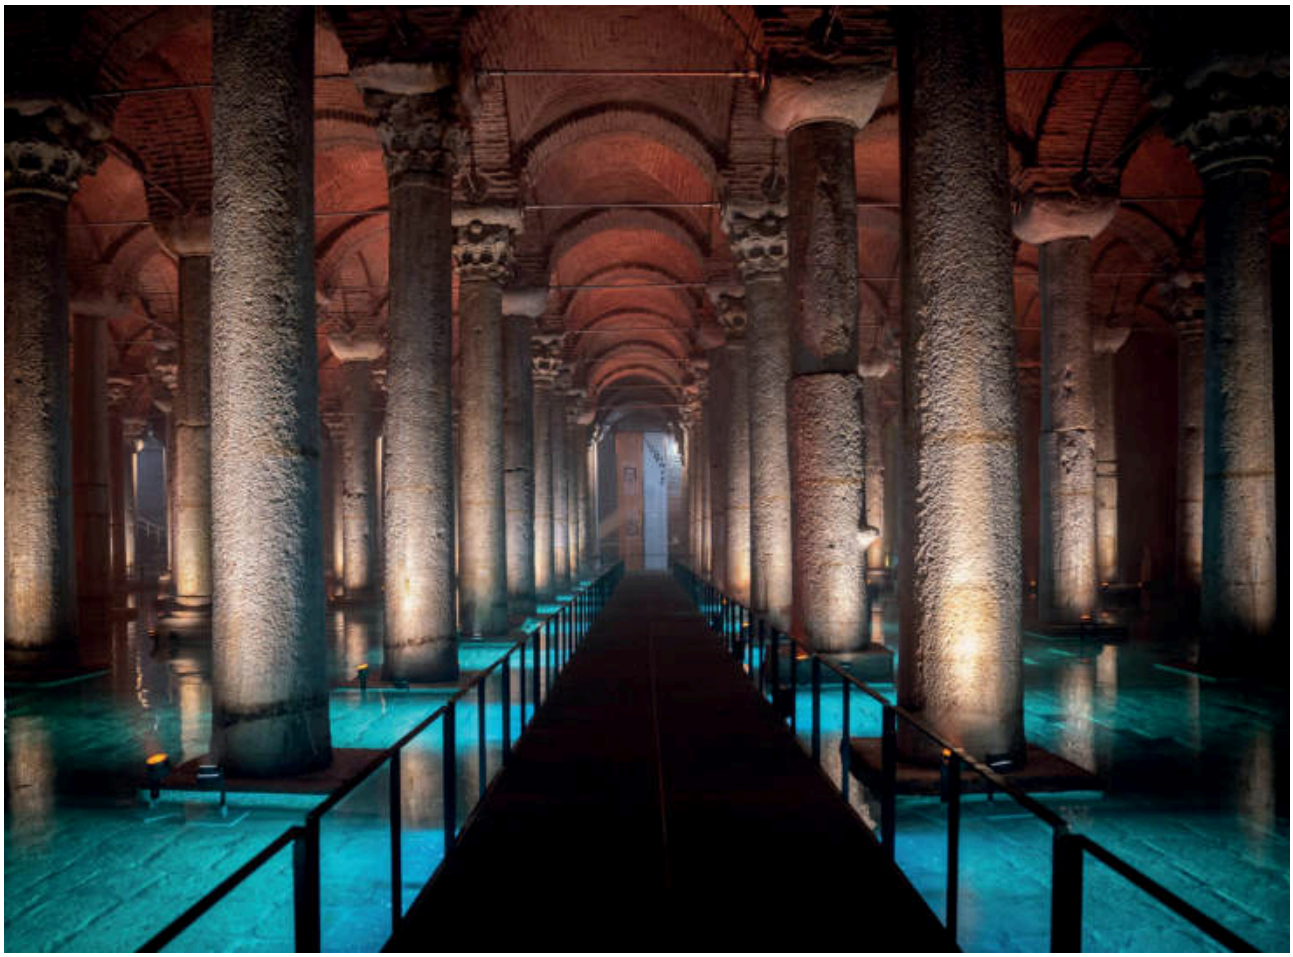

Stainless Steel Outdoor




ATLANTIS

NEARWATER LED FIXTURES
Class III IP67 IK10

The Atlantis Near Water series is specially designed to light objects around pools, fountains, and water features or near the sea with high power LED light. The series is made of solid 316L stainless steel and can therefore withstand these rough environments. Standard finish is polished stainless steel to avoid collection of dirt and algae, but a brushed finish is also possible. The series comes as recessed, surface mount or spots. The spots are heavy duty with stainless steel brackets for sturdy fixing. A specially developed power cable ensures for a long lifetime in extreme conditions without any ingress of water. The low voltage electronic LED driver is housed in the base of the fixture. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber or RGB. Several lenses from 10 to 40 degrees are available to choose from to achieve the desired light effect.

Frame
316L Stainless Steel
Body
316L Stainless Steel
Recessing Tube
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
Stainless Steel
Mounting Brackets
316L Stainless Steel





"Customization" is EMFA's standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.























LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50ºC. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

ATLANTIS

NEARWATER LED FIXTURES
Class III IP67 IK10







POWER LED

Voltage : 12V AC or DC (24V AC or DC on request)


Lens : 10°, 25°, 40°

Diffuser : 8 mm Clear Glass
(Frosted Glass on request)

Cable : Potted 5m 2x0,75 H03 VV-F

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
1W LED	2700 K	95 lm	10°,25°,40°	412102	412112
1W LED	3000 K	95 lm	10°,25°,40°	412101	412111
1W LED	4500 K	97 lm	10°,25°,40°	412106	412116
1W LED	6000 K	99 lm	10°,25°,40°	412107	412117
3W LED	2700 K	285 lm	10°,25°,40°	421224	421234
3W LED	3000 K	285 lm	10°,25°,40°	421221	421231
3W LED	4500 K	290 lm	10°,25°,40°	421222	421232
3W LED	6000 K	296 lm	10°,25°,40°	421223	421233

ATLANTIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
3W LED	2700 K	285 lm	10°,25°,40°	412122	412132
3W LED	3000 K	285 lm	10°,25°,40°	412121	412131
3W LED	4500 K	290 lm	10°,25°,40°	412126	412136
3W LED	6000 K	296 lm	10°,25°,40°	412127	412137
9W LED	2700 K	855 lm	10°,25°,40°	421354	421364
9W LED	3000 K	855 lm	10°,25°,40°	421351	421361
9W LED	4500 K	872 lm	10°,25°,40°	421352	421362
9W LED	6000 K	890 lm	10°,25°,40°	421353	421363
9W LED	RGB		10°,25°,40°	412141	412151

ATLANTIS 5





Power	Kelvin	Real Lumen Output	Lens	Code No Round	Square
9W LED	2700 K	855 lm	10°,25°,40°	412182	412192
9W LED	3000 K	855 lm	10°,25°,40°	412181	412191
9W LED	4500 K	872 lm	10°,25°,40°	412186	412196
9W LED	6000 K	890 lm	10°,25°,40°	412187	412197
27W LED	2700 K	2560 lm	10°,25°,40°	421914	421924
27W LED	3000 K	2560 lm	10°,25°,40°	421911	421921
27W LED	4500 K	2610 lm	10°,25°,40°	421912	421922
27W LED	6000 K	2670 lm	10°,25°,40°	421913	421923
27W LED	RGB		10°,25°,40°	412201	412211

ATLANTIS

NEARWATER SURFACE MOUNTED LED FIXTURES
Class III IP67 IK10







POWER LED

Voltage : 12V AC or DC (24V AC or DC on request)

Lens : 10°, 25°, 40°


Diffuser : 8 mm Clear Glass
(Frosted Glass on request)

Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	412222
1W LED	3000 K	95 lm	10°,25°,40°	412221
1W LED	4500 K	97 lm	10°,25°,40°	412226
1W LED	6000 K	99 lm	10°,25°,40°	412227
3W LED	2700 K	285 lm	10°,25°,40°	421244
3W LED	3000 K	285 lm	10°,25°,40°	421241
3W LED	4500 K	290 lm	10°,25°,40°	421242
3W LED	6000 K	296 lm	10°,25°,40°	421243

ATLANTIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	412232
3W LED	3000 K	285 lm	10°,25°,40°	412231
3W LED	4500 K	290 lm	10°,25°,40°	412236
3W LED	6000 K	296 lm	10°,25°,40°	412237
9W LED	2700 K	855 lm	10°,25°,40°	421374
9W LED	3000 K	855 lm	10°,25°,40°	421371
9W LED	4500 K	872 lm	10°,25°,40°	421372
9W LED	6000 K	890 lm	10°,25°,40°	421373
9W LED	RGB		10°,25°,40°	412241

ATLANTIS 5





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	412252
6W LED	3000 K	570 lm	10°,25°,40°	412251
6W LED	4500 K	581 lm	10°,25°,40°	412256
6W LED	6000 K	593 lm	10°,25°,40°	412257
18W LED	2700 K	1710 lm	10°,25°,40°	421934
18W LED	3000 K	1710 lm	10°,25°,40°	421931
18W LED	4500 K	1744 lm	10°,25°,40°	421932
18W LED	6000 K	1779 lm	10°,25°,40°	421933
27W LED	40V DC RGB		10°,25°,40°	412271

EMFA

ATLANTIS

NEARWATER SURFACE MOUNTED LED FIXTURES
Class III IP67 IK10






POWER LED

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	412282
1W LED	3000 K	95 lm	10°,25°,40°	412281
1W LED	4500 K	97 lm	10°,25°,40°	412286
1W LED	6000 K	99 lm	10°,25°,40°	412287
3W LED	2700 K	285 lm	10°,25°,40°	421254
3W LED	3000 K	285 lm	10°,25°,40°	421251
3W LED	4500 K	290 lm	10°,25°,40°	421252
3W LED	6000 K	296 lm	10°,25°,40°	421253

ATLANTIS 1





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	421264
1W LED	3000 K	95 lm	10°,25°,40°	421261
1W LED	4500 K	97 lm	10°,25°,40°	421266
1W LED	6000 K	99 lm	10°,25°,40°	421267
3W LED	2700 K	285 lm	10°,25°,40°	421274
3W LED	3000 K	285 lm	10°,25°,40°	421271
3W LED	4500 K	290 lm	10°,25°,40°	421272
3W LED	6000 K	296 lm	10°,25°,40°	421273

ATLANTIS

NEARWATER LED SPOT
Class III IP67 IK10












POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 1 NEAR WATER LED SPOT






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	421394
3W LED	3000 K	285 lm	10°,25°,40°	421391
3W LED	4500 K	290 lm	10°,25°,40°	421392
3W LED	6000 K	296 lm	10°,25°,40°	421393
9W LED	2700 K	855 lm	10°,25°,40°	421404
9W LED	3000 K	855 lm	10°,25°,40°	421401
9W LED	4500 K	872 lm	10°,25°,40°	421402
9W LED	6000 K	890 lm	10°,25°,40°	421403
9W LED	RGB		10°,25°,40°	412411

ATLANTIS 2 NEAR WATER LED SPOT






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	412292
3W LED	3000 K	285 lm	10°,25°,40°	412291
3W LED	4500 K	290 lm	10°,25°,40°	412296
3W LED	6000 K	296 lm	10°,25°,40°	412297
9W LED	2700 K	855 lm	10°,25°,40°	421384
9W LED	3000 K	855 lm	10°,25°,40°	421381
9W LED	4500 K	872 lm	10°,25°,40°	421382
9W LED	6000 K	890 lm	10°,25°,40°	421383
9W LED	RGB		10°,25°,40°	412301

ATLANTIS 3





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	421504
6W LED	3000 K	570 lm	10°,25°,40°	421501
6W LED	4500 K	581 lm	10°,25°,40°	421502
6W LED	6000 K	593 lm	10°,25°,40°	421503
18W LED	2700 K	1710 lm	10°,25°,40°	421514
18W LED	3000 K	1710 lm	10°,25°,40°	421511
18W LED	4500 K	1744 lm	10°,25°,40°	421512
18W LED	6000 K	1779 lm	10°,25°,40°	421513

EMFA

ATLANTIS

NEARWATER LED SPOT
Class III IP67 IK10












POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 4






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	421604
6W LED	3000 K	570 lm	10°,25°,40°	421601
6W LED	4500 K	581 lm	10°,25°,40°	421602
6W LED	6000 K	593 lm	10°,25°,40°	421603
18W LED	2700 K	1710 lm	10°,25°,40°	421614
18W LED	3000 K	1710 lm	10°,25°,40°	421611
18W LED	4500 K	1744 lm	10°,25°,40°	421612
18W LED	6000 K	1779 lm	10°,25°,40°	421613

ATLANTIS 5 NEAR WATER LED SPOT






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	412312
6W LED	3000 K	570 lm	10°,25°,40°	412311
6W LED	4500 K	581 lm	10°,25°,40°	412316
6W LED	6000 K	593 lm	10°,25°,40°	412317
18W LED	2700 K	1710 lm	10°,25°,40°	421964
18W LED	3000 K	1710 lm	10°,25°,40°	421961
18W LED	4500 K	1744 lm	10°,25°,40°	421962
18W LED	6000 K	1779 lm	10°,25°,40°	421963

ATLANTIS 5 NEAR WATER LED SPOT





Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	412322
9W LED	3000 K	855 lm	10°,25°,40°	412321
9W LED	4500 K	872 lm	10°,25°,40°	412326
9W LED	6000 K	890 lm	10°,25°,40°	412327
27W LED	2700 K	2560 lm	10°,25°,40°	421954
27W LED	3000 K	2560 lm	10°,25°,40°	421951
27W LED	4500 K	2610 lm	10°,25°,40°	421952
27W LED	6000 K	2670 lm	10°,25°,40°	421953
27W LED	RGB		10°,25°,40°	412331

ATLANTIS

NEARWATER LED SPOT
Class III IP67 IK10












POWER LEDs

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5m 2x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red

ATLANTIS 5 NEAR WATER LED SPOT






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	412342
6W LED	3000 K	570 lm	10°,25°,40°	412341
6W LED	4500 K	581 lm	10°,25°,40°	412346
6W LED	6000 K	593 lm	10°,25°,40°	412347
18W LED	2700 K	1710 lm	10°,25°,40°	421974
18W LED	3000 K	1710 lm	10°,25°,40°	421971
18W LED	4500 K	1744 lm	10°,25°,40°	421972
18W LED	6000 K	1779 lm	10°,25°,40°	421973

ATLANTIS 5 NEAR WATER LED SPOT





Power	Kelvin	Real Lumen Output	Lens	Code No
9W LED	2700 K	855 lm	10°,25°,40°	412352
9W LED	3000 K	855 lm	10°,25°,40°	412351
9W LED	4500 K	872 lm	10°,25°,40°	412356
9W LED	6000 K	890 lm	10°,25°,40°	412357
27W LED	2700 K	2560 lm	10°,25°,40°	421984
27W LED	3000 K	2560 lm	10°,25°,40°	421981
27W LED	4500 K	2610 lm	10°,25°,40°	421982
27W LED	6000 K	2670 lm	10°,25°,40°	421983
27W LED	RGB		10°,25°,40°	412361

ATLANTIS

MARINE BOLLARD
Class I IP65 IK08


LINEAR LED

Head : 316L Stainless Steel
Diffuser : Clear Polycarbonate
Pipe : 316L Stainless Steel
Isolation Belt : Polycarbonate
Finish : Polished or Brushed



POLISHED






Power	Code No 45 cm	70 cm	110 cm
LINEAR LED 4W	409001	409101	409201

POLISHED






Power	Lampholder	Code No 45 cm	70 cm	110 cm
ELECTRONIC FLUO 23W	E27	409011	409111	409211

BRUSHED







Power	Code No 45 cm	70 cm	110 cm
LINEAR LED 4W	410001	410101	410201

BRUSHED






Power	Lampholder	Code No 45 cm	70 cm	110 cm
ELECTRONIC FLUO 23W	E27	410011	410111	410211



For ATLANTIS **Anchor** Code No: 955201

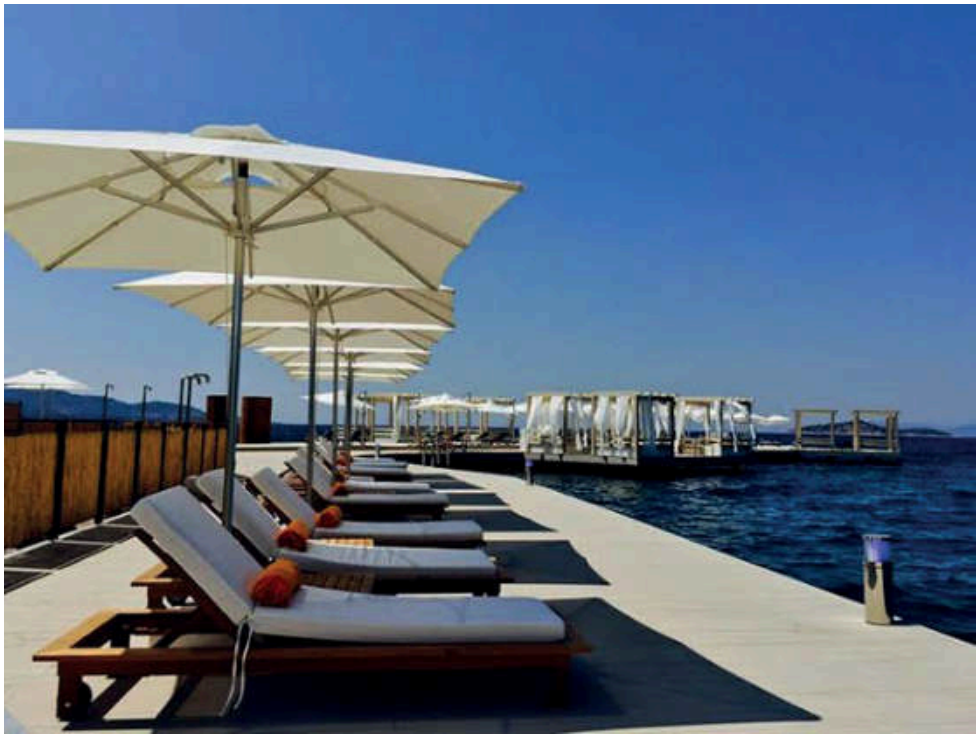


INOX LED APPLIQUES
Class I IP65 IK08

The Inox Applique series consists of a range of LED and metal halide sources to deliver the desired light effect to facades and columns. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 24 to 60 degrees are available to choose from to achieve the desired light effect.



Pipe
316L Stainless Steel
Body
316L Stainless Steel
Cover
316L Stainless Steel
Finish
Polished
Diffusers
Tempered Glass
Gaskets
Silicone
Connection
IP connection box



“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

INOX ONE WAY LED APPLIQUES
Class I IP65 IK08



CREE COB LED


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

INOX 1




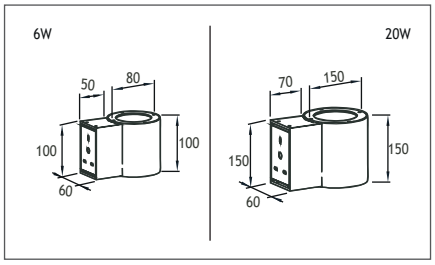

Power	Kelvin	Lens	Code No
6W LED	2700 K	24°,36°,60°	135003
6W LED	3000 K	24°,36°,60°	135001
6W LED	4000 K	24°,36°,60°	135002
20W LED	2700 K	24°,36°,60°	135013
20W LED	3000 K	24°,36°,60°	135011
20W LED	4000 K	24°,36°,60°	135012

INOX 2




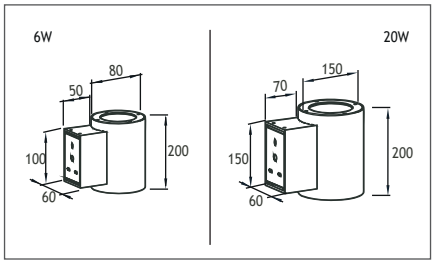

Power	Kelvin	Lens	Code No
6W LED	2700 K	24°,36°,60°	135023
6W LED	3000 K	24°,36°,60°	135021
6W LED	4000 K	24°,36°,60°	135022
20W LED	2700 K	24°,36°,60°	135033
20W LED	3000 K	24°,36°,60°	135031
20W LED	4000 K	24°,36°,60°	135032

INOX 3



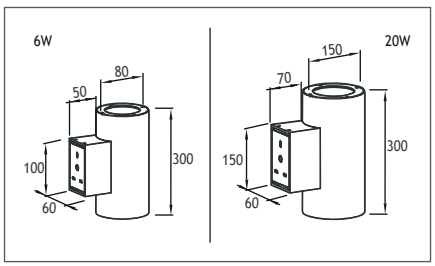

Power	Kelvin	Lens	Code No
6W LED	2700 K	24°,36°,60°	135043
6W LED	3000 K	24°,36°,60°	135041
6W LED	4000 K	24°,36°,60°	135042
20W LED	2700 K	24°,36°,60°	135053
20W LED	3000 K	24°,36°,60°	135051
20W LED	4000 K	24°,36°,60°	135052

EMFA

INOX

ONE WAY LED APPLIQUES
Class I IP65 IK08



CREE COB LED


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

INOX 1




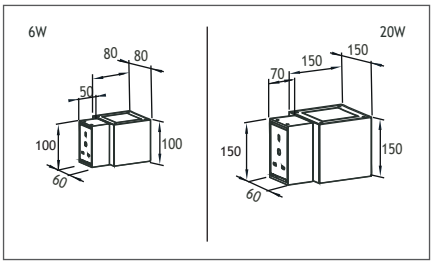

Power	Kelvin	Lens	Code No
6W LED	2700 K	24°,36°,60°	135203
6W LED	3000 K	24°,36°,60°	135201
6W LED	4000 K	24°,36°,60°	135202
20W LED	2700 K	24°,36°,60°	135213
20W LED	3000 K	24°,36°,60°	135211
20W LED	4000 K	24°,36°,60°	135212

INOX 2



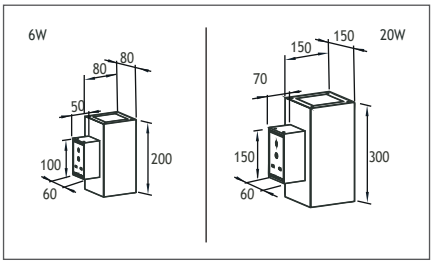

Power	Kelvin	Lens	Code No
6W LED	2700 K	24°,36°,60°	135223
6W LED	3000 K	24°,36°,60°	135221
6W LED	4000 K	24°,36°,60°	135222
20W LED	2700 K	24°,36°,60°	135233
20W LED	3000 K	24°,36°,60°	135231
20W LED	4000 K	24°,36°,60°	135232

INOX TWO WAY LED APPLIQUES
Class I IP65 IK08



CREE COB LED


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

INOX 1




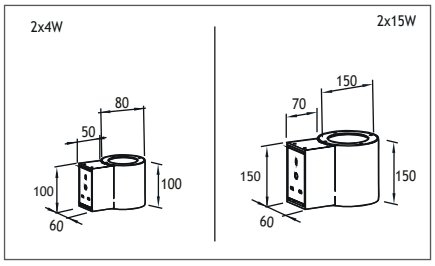

Power	Kelvin	Lens	Code No
4W LED	2700 K	24°,36°,60°	135103
4W LED	3000 K	24°,36°,60°	135101
4W LED	4000 K	24°,36°,60°	135102
15W LED	2700 K	24°,36°,60°	135113
15W LED	3000 K	24°,36°,60°	135111
15W LED	4000 K	24°,36°,60°	135112

INOX 2




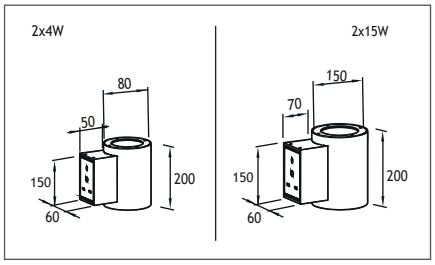

Power	Kelvin	Lens	Code No
4W LED	2700 K	24°,36°,60°	135123
4W LED	3000 K	24°,36°,60°	135121
4W LED	4000 K	24°,36°,60°	135122
15W LED	2700 K	24°,36°,60°	135133
15W LED	3000 K	24°,36°,60°	135131
15W LED	4000 K	24°,36°,60°	135132

INOX 3



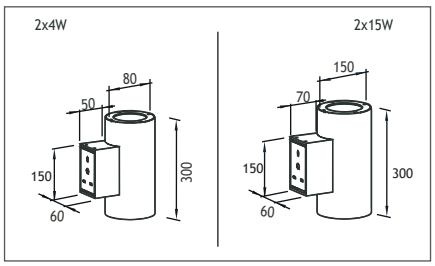

Power	Kelvin	Lens	Code No
4W LED	2700 K	24°,36°,60°	135143
4W LED	3000 K	24°,36°,60°	135141
4W LED	4000 K	24°,36°,60°	135142
15W LED	2700 K	24°,36°,60°	135153
15W LED	3000 K	24°,36°,60°	135151
15W LED	4000 K	24°,36°,60°	135152

EMFA

INOX

TWO WAY LED APPLIQUES
Class I IP65 IK08



CREE COB LED


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

INOX 1




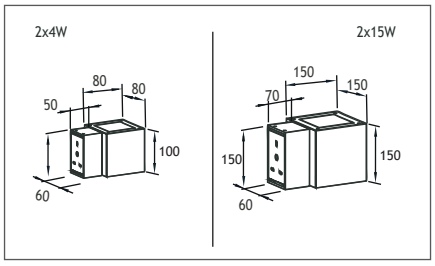

Power	Kelvin	Real Lumen Output	Lens	Code No Polished	Brushed
4W LED	2700 K	360 lm	24°,36°,60°	135303	135313
4W LED	3000 K	360 lm	24°,36°,60°	135301	135311
4W LED	4000 K	396 lm	24°,36°,60°	135302	135312
15W LED	2700 K	1350 lm	24°,36°,60°	135343	135353
15W LED	3000 K	1350 lm	24°,36°,60°	135341	135351
15W LED	4000 K	1485 lm	24°,36°,60°	135342	135352

INOX 2



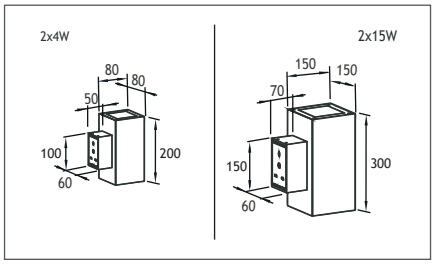

Power	Kelvin	Real Lumen Output	Lens	Code No Polished	Brushed
4W LED	2700 K	360 lm	24°,36°,60°	135323	135333
4W LED	3000 K	360 lm	24°,36°,60°	135321	135331
4W LED	4000 K	396 lm	24°,36°,60°	135322	135332
15W LED	2700 K	1350 lm	24°,36°,60°	135363	135373
15W LED	3000 K	1350 lm	24°,36°,60°	135361	135371
15W LED	4000 K	1485 lm	24°,36°,60°	135362	135372

INOX SURFACE MOUNTED CEILING FIXTURES
Class I IP65 IK08

The Inox surface series consists of a range of LED and metal halide sources to deliver the desired light effect to facades and columns. The LEDs used come in 4 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 24 to 60 degrees are available to choose from to achieve the desired light effect.




Body
316L Stainless Steel
Cover
316L Stainless Steel
Diffuser
Tempered Glass
Pipe
316L Stainless Steel
Isolation Belt
Polycarbonate
Finish
Polished
Gaskets
Silicone
Connection
IP connection box

CREE COB LED

Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Lens : 24° / 36° / 60°
Cable : Potted 5 m 3x0,75 H03 VV-F

INOX 1






Power	Kelvin	Lens	Code No Polished	Brushed
15W LED	2700 K	24°,36°,60°	136003	136043
15W LED	3000 K	24°,36°,60°	136001	136041
15W LED	4000 K	24°,36°,60°	136002	136042
20W LED	2700 K	24°,36°,60°	136053	136013
20W LED	3000 K	24°,36°,60°	136051	136011
20W LED	4000 K	24°,36°,60°	136052	136012

INOX 2





Power	Kelvin	Lens	Code No Polished	Brushed
15W LED	2700 K	24°,36°,60°	136023	136063
15W LED	3000 K	24°,36°,60°	136021	136061
15W LED	4000 K	24°,36°,60°	136022	136062
20W LED	2700 K	24°,36°,60°	136073	136033
20W LED	3000 K	24°,36°,60°	136071	136031
20W LED	4000 K	24°,36°,60°	136072	136032

Downlights



PINARA

LINEAR LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors

Black White

The PINARA LED downlight is specially designed to deliver high output LED light with very clean beam angles to corridors, hotel rooms, museums and general lighting of public spaces. The Nichia LEDs in the PINARA are very efficient and have a high CRI (90). The unique lens that is used in this fixture creates very sharp beams that minimize the spill of uncontrolled light from the fixture. This reduces the glare of the fixture and gives more control to the architects and designers.








Body
Polycarbonate
Heatsink
Aluminium extrusion profile
Diffuser
With clear or frosted tempered glass, without glass
Springs
Steel
Cable
0.5 m exiting top of fixture
Gear
Non-Dimmable electronic LED driver (1-10V Dimmable and DALI drivers available on request)

Application
Symmetrical and asymmetrical lighting for general lighting such as museums, hospitals, hotel rooms, dormitories, corridors, shops, and balconies.

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 standard paint colors, 3 white tones, 3 wattages are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

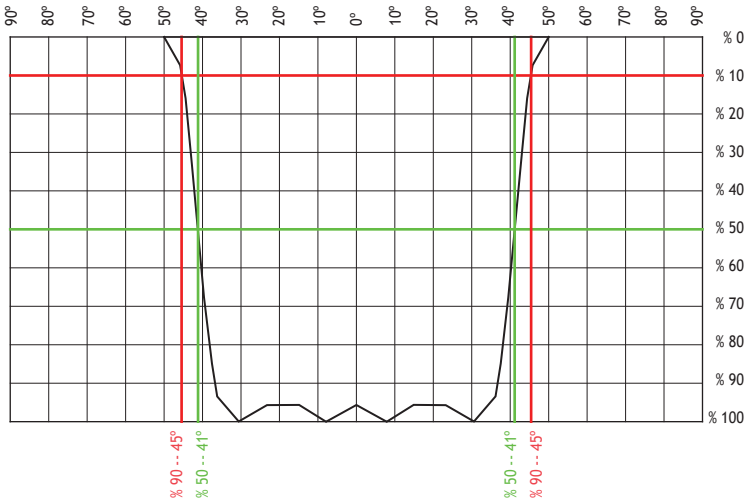

LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

PINARA

LINEAR LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors


Black White




POWER LED

Led : 350 - 500 - 700 mA (Nichia)
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver and
DALI Driver available on request)
Diffuser : Clear of frosted tempered Glass
Cable : 0.5 m 2x0,75 mm H03 VV-F

PINARA 1 CLEAR OR FROSTED TEMPERED GLASS






Power	Kelvin	Real Lumen Output	Code No
10W LED	2700 K	950 lm	392001
10W LED	3000 K	950 lm	392002
10W LED	4000 K	968 lm	392003
15W LED	2700 K	1425 lm	392011
15W LED	3000 K	1425 lm	392012
15W LED	4000 K	1453 lm	392013
21W LED	2700 K	1995 lm	392021
21W LED	3000 K	1995 lm	392022
21W LED	4000 K	2053 lm	392023

PINARA 2 SYMMETRICAL






Power	Kelvin	Real Lumen Output	Code No
10W LED	2700 K	950 lm	392101
10W LED	3000 K	950 lm	392102
10W LED	4000 K	968 lm	392103
15W LED	2700 K	1425 lm	392111
15W LED	3000 K	1425 lm	392112
15W LED	4000 K	1453 lm	392113
21W LED	2700 K	1995 lm	392121
21W LED	3000 K	1995 lm	392122
21W LED	4000 K	2053 lm	392123

PINARA 2 ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Code No
10W LED	2700 K	950 lm	392201
10W LED	3000 K	950 lm	392202
10W LED	4000 K	968 lm	392203
15W LED	2700 K	1425 lm	392211
15W LED	3000 K	1425 lm	392212
15W LED	4000 K	1453 lm	392213
21W LED	2700 K	1995 lm	392221
21W LED	3000 K	1995 lm	392222
21W LED	4000 K	2053 lm	392223

PINARA

TRIMLESS LINEAR LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors

Black White




POWER LED

Led : 350 - 500 - 700 mA (Nichia)
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver and
DALI Driver available on request)
Diffuser : Clear of frosted tempered Glass
Cable : 0.5 m 2x0,75 mm H03 VV-F

PINARA SYMMETRICAL TRIMLESS






Power	Kelvin	Real Lumen Output	Code No
10W LED	2700 K	950 lm	393001
10W LED	3000 K	950 lm	393002
10W LED	4000 K	968 lm	393003
15W LED	2700 K	1425 lm	393011
15W LED	3000 K	1425 lm	393012
15W LED	4000 K	1453 lm	393013
21W LED	2700 K	1995 lm	393021
21W LED	3000 K	1995 lm	393022
21W LED	4000 K	2053 lm	393023


PINARA ASYMMETRICAL TRIMLESS





Power	Kelvin	Real Lumen Output	Code No
10W LED	2700 K	950 lm	393101
10W LED	3000 K	950 lm	393102
10W LED	4000 K	968 lm	393103
15W LED	2700 K	1425 lm	393111
15W LED	3000 K	1425 lm	393112
15W LED	4000 K	1453 lm	393113
21W LED	2700 K	1995 lm	393121
21W LED	3000 K	1995 lm	393122
21W LED	4000 K	2053 lm	393123

EMFA

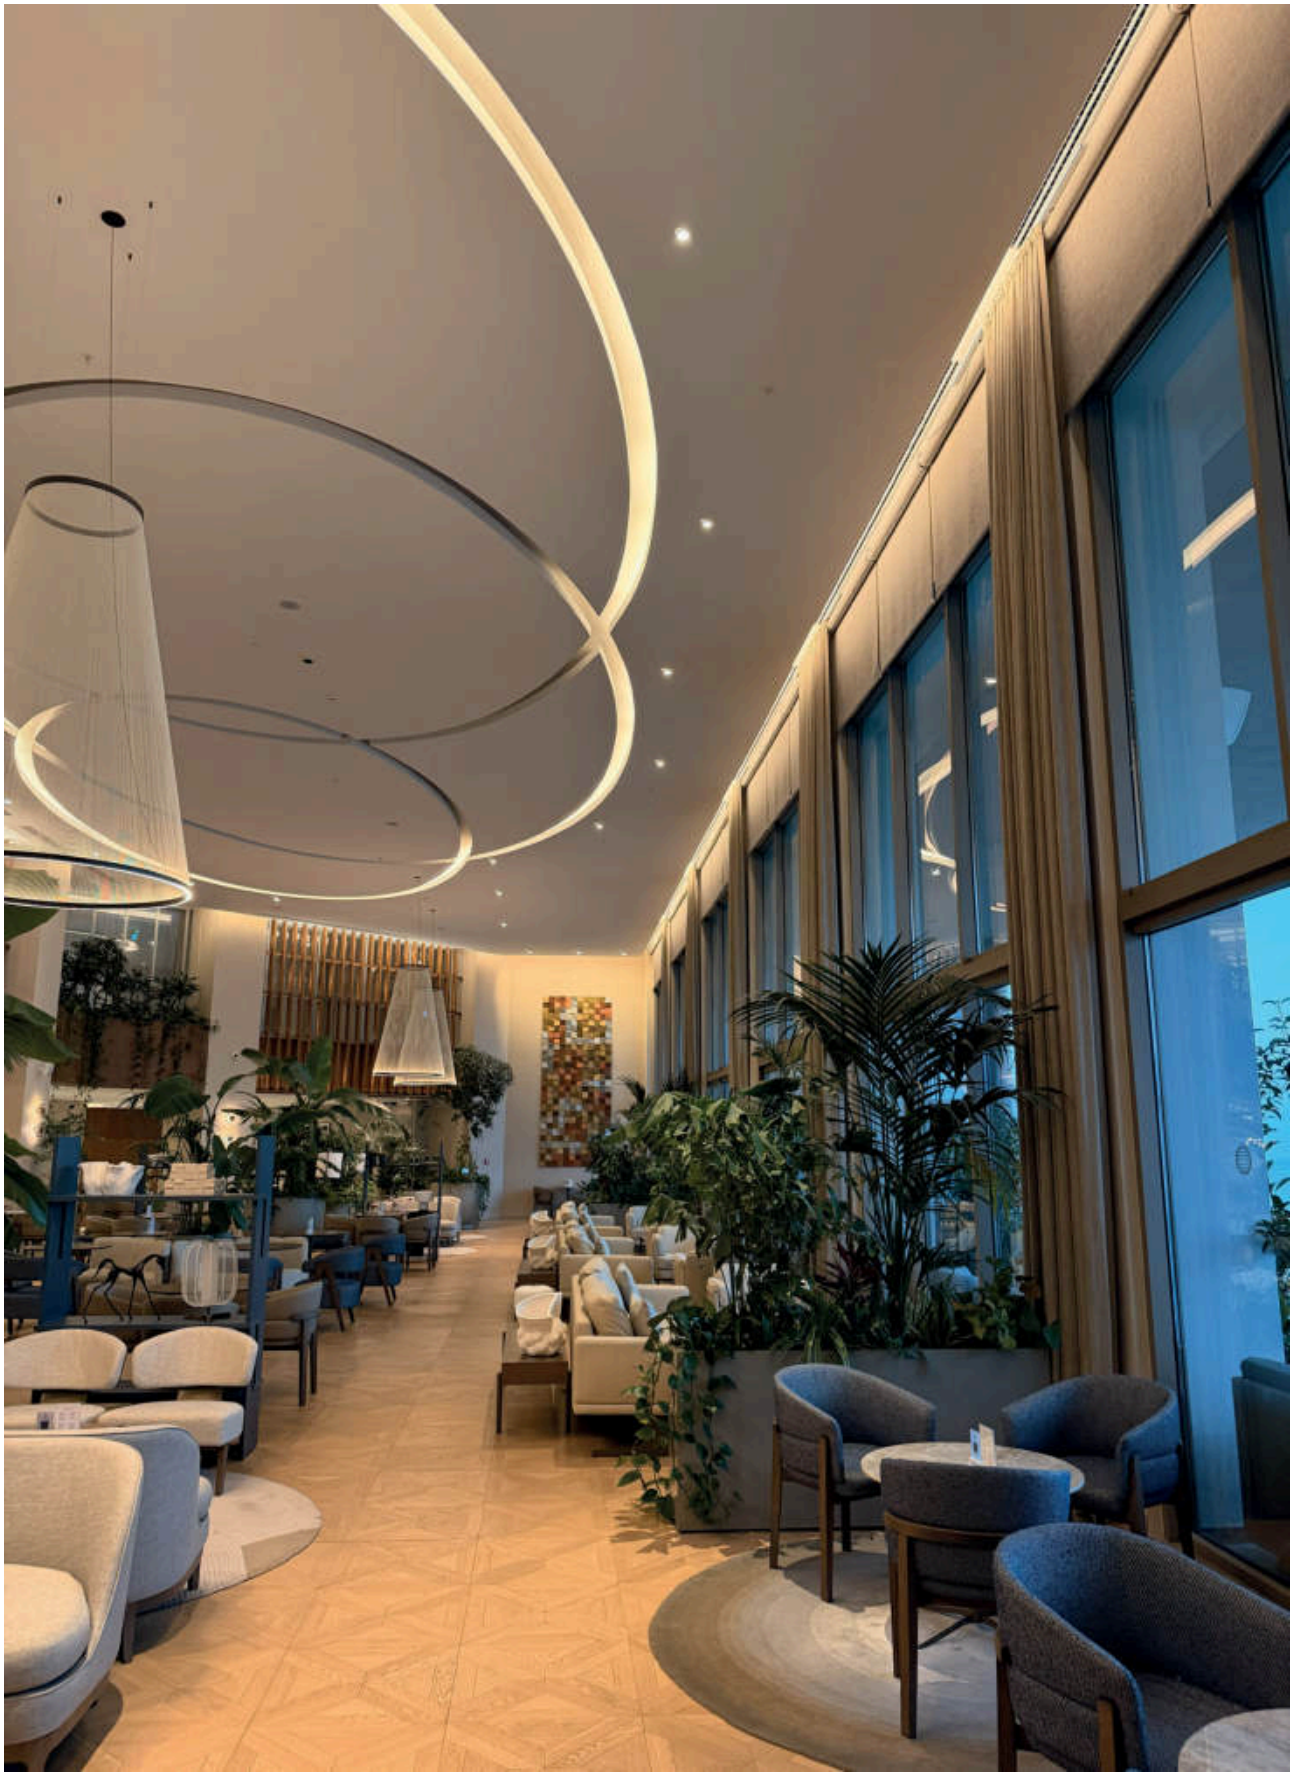

HARPUT

LED DOWNLIGHT
Class II IP65/20

Available in any of these RAL colors

Black White

The Harput LED downlight is specially designed to deliver high output LED light with very clean beam angles to corridors, hotel rooms, museums and general lighting of public spaces. The LEDs used in the HARPUT are very efficient and have a high CRI (90). The unique lens that is used in this fixture creates very sharp beams that minimize the spill of uncontrolled light from the fixture. This reduces the glare of the fixture and gives more control to the architects and designers.

Body : Aluminium
Heatsink : Aluminium
Diffuser : With clear or frosted tempered Glass
Springs : Steel
Cable : 0.5 m exiting top of fixture
Gear : 240V Non-Dimmable electronic LED driver
(1-10V Dimmable and DALI drivers available on request)

HARPUT MINI



Fixed | Adjustable | Trimless Fixed | Trimless Adjustable

HARPUT 2



Fixed | Adjustable | Trimless Fixed | Trimless Adjustable

HARPUT 3



Fixed | Adjustable | Trimless Fixed | Trimless Adjustable

HARPUT 4



Fixed | Adjustable | Trimless Fixed | Trimless Adjustable

Application
Symmetrical and asymmetrical lighting for general lighting such as museums, hospitals, hotel rooms, dormitories, corridors, shops, and balconies.






LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

HARPUT MINI LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors: Black, White











Led : 1W or 3W POWER LED
Reflector : 15°,24°,38° or 60°
Gear : 240V
(1-10V Dimmable Driver & DALI Driver available on request)
Cable : 0,5 m 2x0,75 mm H03 VV-F



HONEYCOMB FOR HARPUT MINI LED DOWNLIGHT
Code No: 953957

Fixed






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	230003
1W LED	3000 K	95 lm	230001
1W LED	4500 K	97 lm	230002
3W LED	2700 K	285 lm	230013
3W LED	3000 K	285 lm	230011
3W LED	4500 K	290 lm	230012

Adjustable






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	230103
1W LED	3000 K	95 lm	230101
1W LED	4500 K	97 lm	230102
3W LED	2700 K	285 lm	230113
3W LED	3000 K	285 lm	230111
3W LED	4500 K	290 lm	230112

Trimless Fixed






Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	234003
1W LED	3000 K	95 lm	234001
1W LED	4500 K	97 lm	234002
3W LED	2700 K	285 lm	234013
3W LED	3000 K	285 lm	234011
3W LED	4500 K	290 lm	234012

Trimless Adjustable





Power	Kelvin	Real Lumen Output	Code No
1W LED	2700 K	95 lm	234103
1W LED	3000 K	95 lm	234101
1W LED	4500 K	97 lm	234102
3W LED	2700 K	285 lm	234113
3W LED	3000 K	285 lm	234111
3W LED	4500 K	290 lm	234112


EMFA

HARPUT 2

LED DOWNLIGHT
Class II IP65

Available in any of these RAL colors

Black White





6W or 12W COB LED

Led : 6W or 12W COB LED


Reflector : 15°,24°,38° or 60°

Gear : 240V
(1-10V Dimmable Driver & DALI Driver available on request)

Cable : 0,5 m 2x0,75 mm H03 VV-F








HONEYCOMB FOR HARPUT 2 LED DOWNLIGHT
Code No: 953958

Fixed






Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	231003
6W LED	3000 K	570 lm	231001
6W LED	4500 K	581 lm	231002
12W LED	2700 K	1140 lm	231013
12W LED	3000 K	1140 lm	231011
12W LED	4500 K	1162 lm	231012

Adjustable






Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	231103
6W LED	3000 K	570 lm	231101
6W LED	4500 K	581 lm	231102
12W LED	2700 K	1140 lm	231113
12W LED	3000 K	1140 lm	231111
12W LED	4500 K	1162 lm	231112

Trimless Fixed






Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	235003
6W LED	3000 K	570 lm	235001
6W LED	4500 K	581 lm	235002
12W LED	2700 K	1140 lm	235013
12W LED	3000 K	1140 lm	235011
12W LED	4500 K	1162 lm	235012

Trimless Adjustable





Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	235103
6W LED	3000 K	570 lm	235101
6W LED	4500 K	581 lm	235102
12W LED	2700 K	1140 lm	235113
12W LED	3000 K	1140 lm	235111
12W LED	4500 K	1162 lm	235112

EMFA

HARPUT 3

LED DOWNLIGHT
Class II IP65

Available in any of these RAL colors

Black White










Led : 12W or 20W COB LED
Reflector : 15°,24°,38° or 60°
Gear : 240V
(1-10V Dimmable Driver & DALI Driver available on request)
Cable : 0,5 m 2x0,75 mm H03 VV-F



HONEYCOMB FOR HARPUT 3 LED DOWNLIGHT
Code No: 953959

Fixed






Power	Kelvin	Real Lumen Output	Code No
12W LED	2700 K	1140 lm	232003
12W LED	3000 K	1140 lm	232001
12W LED	4500 K	1162 lm	232002
20W LED	2700 K	1900 lm	232013
20W LED	3000 K	1900 lm	232011
20W LED	4500 K	1936 lm	232012

Adjustable






Power	Kelvin	Real Lumen Output	Code No
12W LED	2700 K	1140 lm	232103
12W LED	3000 K	1140 lm	232101
12W LED	4500 K	1162 lm	232102
20W LED	2700 K	1900 lm	232113
20W LED	3000 K	1900 lm	232111
20W LED	4500 K	1936 lm	232112

Trimless Fixed






Power	Kelvin	Real Lumen Output	Code No
12W LED	2700 K	1140 lm	236003
12W LED	3000 K	1140 lm	236001
12W LED	4500 K	1162 lm	236002
20W LED	2700 K	1900 lm	236013
20W LED	3000 K	1900 lm	236011
20W LED	4500 K	1936 lm	236012

Trimless Adjustable





Power	Kelvin	Real Lumen Output	Code No
12W LED	2700 K	1140 lm	236103
12W LED	3000 K	1140 lm	236101
12W LED	4500 K	1162 lm	236102
20W LED	2700 K	1900 lm	236113
20W LED	3000 K	1900 lm	236111
20W LED	4500 K	1936 lm	236112

EMFA

HARPUT 4 LED DOWNLIGHT
Class II IP65

Available in any of these RAL colors: Black, White










Led : 20W or 30W COB LED
Reflector : 15°,24°,38° or 60°
Gear : 240V
(1-10V Dimmable Driver & DALI Driver available on request)
Cable : 0,5 m 2x0,75 mm H03 VV-F



HONEYCOMB FOR HARPUT 4 LED DOWNLIGHT
Code No: 953960

Fixed






Power	Kelvin	Real Lumen Output	Code No
20W LED	2700 K	1800 lm	233003
20W LED	3000 K	1800 lm	233001
20W LED	4500 K	1980 lm	233002
30W LED	2700 K	2700 lm	233013
30W LED	3000 K	2700 lm	233011
30W LED	4500 K	2970 lm	233012

Adjustable






Power	Kelvin	Real Lumen Output	Code No
20W LED	2700 K	1800 lm	233103
20W LED	3000 K	1800 lm	233101
20W LED	4500 K	1980 lm	233102
30W LED	2700 K	2700 lm	233113
30W LED	3000 K	2700 lm	233111
30W LED	4500 K	2970 lm	233112

Trimless Fixed






Power	Kelvin	Real Lumen Output	Code No
20W LED	2700 K	1800 lm	237003
20W LED	3000 K	1800 lm	237001
20W LED	4500 K	1980 lm	237002
30W LED	2700 K	2700 lm	237013
30W LED	3000 K	2700 lm	237011
30W LED	4500 K	2970 lm	237012

Trimless Adjustable





Power	Kelvin	Real Lumen Output	Code No
20W LED	2700 K	1800 lm	237103
20W LED	3000 K	1800 lm	237101
20W LED	4500 K	1980 lm	237102
30W LED	2700 K	2700 lm	237113
30W LED	3000 K	2700 lm	237111
30W LED	4500 K	2970 lm	237112

PENTATHLON

LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

The PENTATHLON Dark Reflector LED Downlight is specially designed to provide low glare lighting in high ceiling areas. The Nichia COB chip gives out a high efficiency and high CRI (90) light. The lens that is used in the PENTATHLON allows the light to reach the ground with minimal loss from deep inside the fixture. The depth of the fixture and the clean beam of the lens is what provides the low glare of this fixture.






Body
Die cast aluminium
Paint
Electrostatic powder paint RAL 9016 (available in other RAL colors)
Springs
Steel for mounting in ceilings of 1-25mm thickness
Gear
Non-Dimmable electronic LED driver
(1-10V Dimmable and DALI drivers available on request)
Cable
0.5m exiting from top of fixture

COB LED

Led : 350mA 13W / 500mA 18W LED (Nichia)
Reflector : 24° or 38°
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver and DALI Driver available on request)
Cable : 0.5 m 2x0,75 mm H03 VV-F

SYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
13W LED	2700 K	1235 lm	24°,38°	118203
13W LED	3000 K	1235 lm	24°,38°	118201
13W LED	4000 K	1259 lm	24°,38°	118202
18W LED	2700 K	1710 lm	24°,38°	118403
18W LED	3000 K	1710 lm	24°,38°	118401
18W LED	4000 K	1779 lm	24°,38°	118402

ASYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
13W LED	2700 K	1235 lm	24°,38°	118223
13W LED	3000 K	1235 lm	24°,38°	118221
13W LED	4000 K	1259 lm	24°,38°	118222
18W LED	2700 K	1710 lm	24°,38°	118213
18W LED	3000 K	1710 lm	24°,38°	118211
18W LED	4000 K	1779 lm	24°,38°	118212


PENTATHLON

TRIMLESS LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors








COB LED

Led : 350mA 13W / 500mA 18W LED (Nichia)
Reflector : 24° or 38°
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver and DALI Driver available on request)
Cable : 0.5 m 2x0,75 mm H03 VV-F

TRIMLESS SYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
13W LED	2700 K	1235 lm	24°,38°	118303
13W LED	3000 K	1235 lm	24°,38°	118301
13W LED	4000 K	1259 lm	24°,38°	118302
18W LED	2700 K	1710 lm	24°,38°	118333
18W LED	3000 K	1710 lm	24°,38°	118331
18W LED	4000 K	1779 lm	24°,38°	118332

TRIMLESS ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Lens	Code No
13W LED	2700 K	1235 lm	24°,38°	118323
13W LED	3000 K	1235 lm	24°,38°	118321
13W LED	4000 K	1259 lm	24°,38°	118322
18W LED	2700 K	1710 lm	24°,38°	118343
18W LED	3000 K	1710 lm	24°,38°	118341
18W LED	4000 K	1779 lm	24°,38°	118342

EMFA


Beauty
14.00



SATURN LED DOWNLIGHT
Class II IP20

Available in any of these RAL colors

9016 9005 7016 7004 1015

The Saturn LED Downlight is specially designed to provide highest energy efficiency in general lighting applications. Using latest LED technology in combination with special plastic moulding and paint application allows for around 90lm/W lighting output. The highly efficient diffuser provides a completely homogenous light output.




Body
Die cast aluminium
Paint
Electrostatic powder paint RAL 9016 (available in other RAL colors)
Springs
Steel for mounting in ceilings of 1-25mm thickness
Gear
Non-Dimmable electronic LED driver (1-10V Dimmable and DALI drivers available on request)
Cable
0.5m exiting from top of fixture

COB LED

Led : 180mA 6W / 250mA 8W COB LED
Reflector : 10° / 38° / 60°
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver and DALI Driver available on request)
Cable : 0.5 m 2x0,75 mm H03 VV-F

FIXED






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,38°,60°	528004
6W LED	3000 K	570 lm	10°,38°,60°	528001
6W LED	4000 K	581 lm	10°,38°,60°	528002
6W LED	6000 K	593 lm	10°,38°,60°	528003
8W LED	2700 K	760 lm	10°,38°,60°	528014
8W LED	3000 K	760 lm	10°,38°,60°	528011
8W LED	4000 K	774 lm	10°,38°,60°	528012
8W LED	6000 K	790 lm	10°,38°,60°	528013

ADJUSTABLE






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,38°,60°	528104
6W LED	3000 K	570 lm	10°,38°,60°	528101
6W LED	4000 K	581 lm	10°,38°,60°	528102
6W LED	6000 K	593 lm	10°,38°,60°	528103
8W LED	2700 K	760 lm	10°,38°,60°	528114
8W LED	3000 K	760 lm	10°,38°,60°	528111
8W LED	4000 K	774 lm	10°,38°,60°	528112
8W LED	6000 K	790 lm	10°,38°,60°	528113



Honeycomb
Code No: 953956

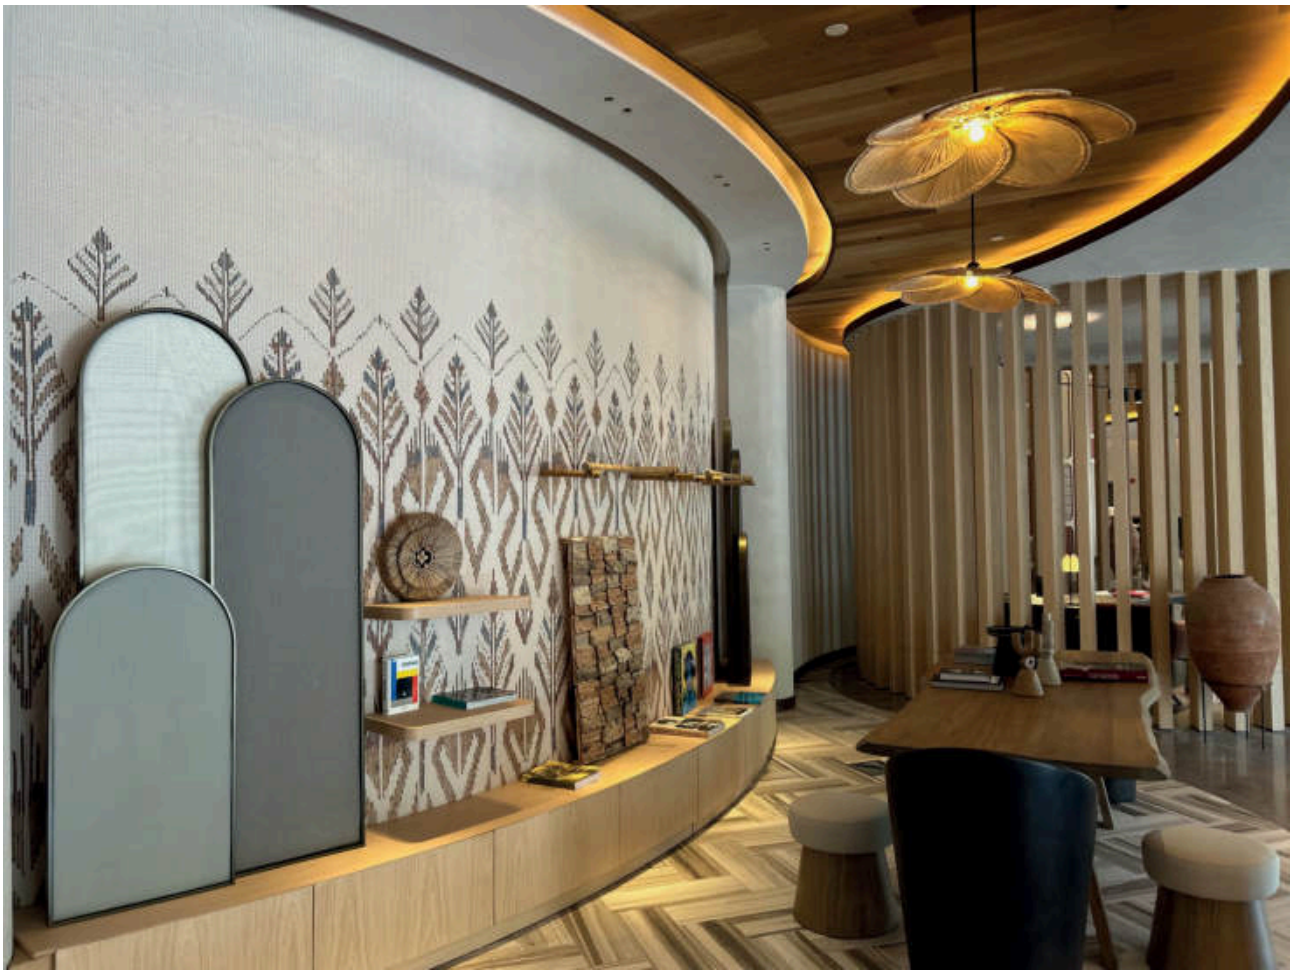

SATURN MINI

DEEP LED DOWNLIGHT
Class I IP20

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



COB LED


Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Diffuser : Clear Glass with painted circumference 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

SATURN MINI





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	25°,40°	529004
1W LED	3000 K	95 lm	25°,40°	529001
1W LED	4500 K	97 lm	25°,40°	529002
1W LED	6000 K	99 lm	25°,40°	529003
3W LED	2700 K	285 lm	25°,40°	529014
3W LED	3000 K	285 lm	25°,40°	529011
3W LED	4500 K	290 lm	25°,40°	529012
3W LED	6000 K	296 lm	25°,40°	529013

CUNDA


LED DOWNLIGHT
Class II IP44

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

CUNDA 1






Power	Kelvin	Real Lumen Output	Code No DOT	Code No HALO
7W LED	2700 K	665 lm	419203	419213
7W LED	3000 K	665 lm	419201	419211
7W LED	4000 K	677 lm	419202	419212

CUNDA 2





Power	Kelvin	Real Lumen Output	Code No DOT	Code No HALO
11W LED	2700 K	1045 lm	419303	419313
11W LED	3000 K	1045 lm	419301	419314
11W LED	4000 K	1065 lm	419302	419315

EMFA

DOT

LED DOWNLIGHT
Class II IP44


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

DOT








Power	Kelvin	Real Lumen Output	Code No
7W LED	2700 K	665 lm	112303
7W LED	3000 K	665 lm	112301
7W LED	4000 K	677 lm	112302
11W LED	2700 K	1045 lm	112313
11W LED	3000 K	1045 lm	112311
11W LED	4000 K	1065 lm	112312

HALO








Power	Kelvin	Real Lumen Output	Code No
7W LED	2700 K	665 lm	112403
7W LED	3000 K	665 lm	112401
7W LED	4000 K	677 lm	112402
11W LED	2700 K	1045 lm	112413
11W LED	3000 K	1045 lm	112411
11W LED	4000 K	1065 lm	112412

PATARA

LED DOWNLIGHT
Class II IP44

PATARA 1






Power	Kelvin	Real Lumen Output	Code No DOT	Code No HALO
7W LED	2700 K	665 lm	420303	420313
7W LED	3000 K	665 lm	420301	420314
7W LED	4000 K	677 lm	420302	420315

PATARA 2





Power	Kelvin	Real Lumen Output	Code No DOT	Code No HALO
7W LED	2700 K	665 lm	420403	420413
7W LED	3000 K	665 lm	420401	420414
7W LED	4000 K	677 lm	420402	420415

EMFA

BELKIS MINI LED DOWNLIGHT
Class I IP65


Cover
Die cast aluminium or Stainless steel
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
Tempered Glass



Voltage : 240V A.C with integrated driver (24V AC or DC on request)
Lens : 25°, 40°
Diffuser : Clear Glass with painted circumference 8 mm (Frosted Glass on request)
Cable : Potted 5 m 3x0,75 H03 VV-F

BELKIS MINI





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	25°,40°	297004
1W LED	3000 K	95 lm	25°,40°	297001
1W LED	4500 K	97 lm	25°,40°	297002
1W LED	6000 K	99 lm	25°,40°	297003
3W LED	2700 K	285 lm	25°,40°	297014
3W LED	3000 K	285 lm	25°,40°	297011
3W LED	4500 K	290 lm	25°,40°	297012
3W LED	6000 K	296 lm	25°,40°	297013

MARATHON

LED DOWNLIGHT
Class II IP65 IK10

Available in any of these RAL colors

9016 9005 7016 7004 1015




Body
Die cast aluminium designed to be heat sink
Cover
Die cast aluminium RAL9002 (available in other RAL colors as well as chrome or gold on request)
Diffuser
Clear of frosted tempered Glass
Springs
Stainless steel for mounting in ceilings or 1-25 mm
(with plastic covers for the Marathon 2 Downlight)
Cable
0.5 m exiting top of fixture
Gear
Non-Dimmable electronic LED driver (1-10V Dimmable and DALI drivers available on request)

COB LED (350-500 mA)

Led : COB LED (350-500mA)
Reflector : 10°, 23°, 38° Aluminium-Coated Polycarbonate Reflector
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver & DALI Driver available on request)
Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm
Cable : 0,5 m 2x0,75 mm H03 VV-F


MARATHON 2






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,23°,38°	260101
11W LED	3000 K	1045 lm	10°,23°,38°	260102
11W LED	4000 K	1065 lm	10°,23°,38°	260103
18W LED	2700 K	1710 lm	10°,23°,38°	260113
18W LED	3000 K	1710 lm	10°,23°,38°	260111
18W LED	4000 K	1779 lm	10°,23°,38°	260112


MARATHON 2 GLASS






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,23°,38°	263001
11W LED	3000 K	1045 lm	10°,23°,38°	263002
11W LED	4000 K	1065 lm	10°,23°,38°	263003
18W LED	2700 K	1710 lm	10°,23°,38°	263011
18W LED	3000 K	1710 lm	10°,23°,38°	263012
18W LED	4000 K	1744 lm	10°,23°,38°	263013

MARATHON 2 GLASS





Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,23°,38°	263201
11W LED	3000 K	1045 lm	10°,23°,38°	263202
11W LED	4000 K	1065 lm	10°,23°,38°	263203
18W LED	2700 K	1710 lm	10°,23°,38°	263211
18W LED	3000 K	1710 lm	10°,23°,38°	263212
18W LED	4000 K	1744 lm	10°,23°,38°	263213

EMFA



MARATHON

TIR LENS LED DOWNLIGHT
Class II IP65 IK10

Available in any of these RAL colors

9016 9005 7016 7004 1015



COB LED (350-700 mA)

Lens : 10°, 20°, 30° Mirror TIR Lens

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver & DALI Driver available on request)

Springs : Stainless Steel for mounting in ceilings of 1-25 mm

Cable : 0,5 m 2x0,75 mm H03 VV-F

MARATHON 3






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,20°,30°	261003
11W LED	3000 K	1045 lm	10°,20°,30°	261001
11W LED	4000 K	1065 lm	10°,20°,30°	261002
18W LED	2700 K	1710 lm	10°,20°,30°	261013
18W LED	3000 K	1710 lm	10°,20°,30°	261011
18W LED	4000 K	1779 lm	10°,20°,30°	261012


MARATHON 4





Power	Kelvin	Real Lumen Output	Lens	Code No
25W LED	2700 K	2375 lm	10°,20°,30°	262003
25W LED	3000 K	2375 lm	10°,20°,30°	262001
25W LED	4000 K	2422 lm	10°,20°,30°	262002
32W LED	2700 K	3040 lm	10°,20°,30°	262023
32W LED	3000 K	3040 lm	10°,20°,30°	262021
32W LED	4000 K	3100 lm	10°,20°,30°	262022

EMFA

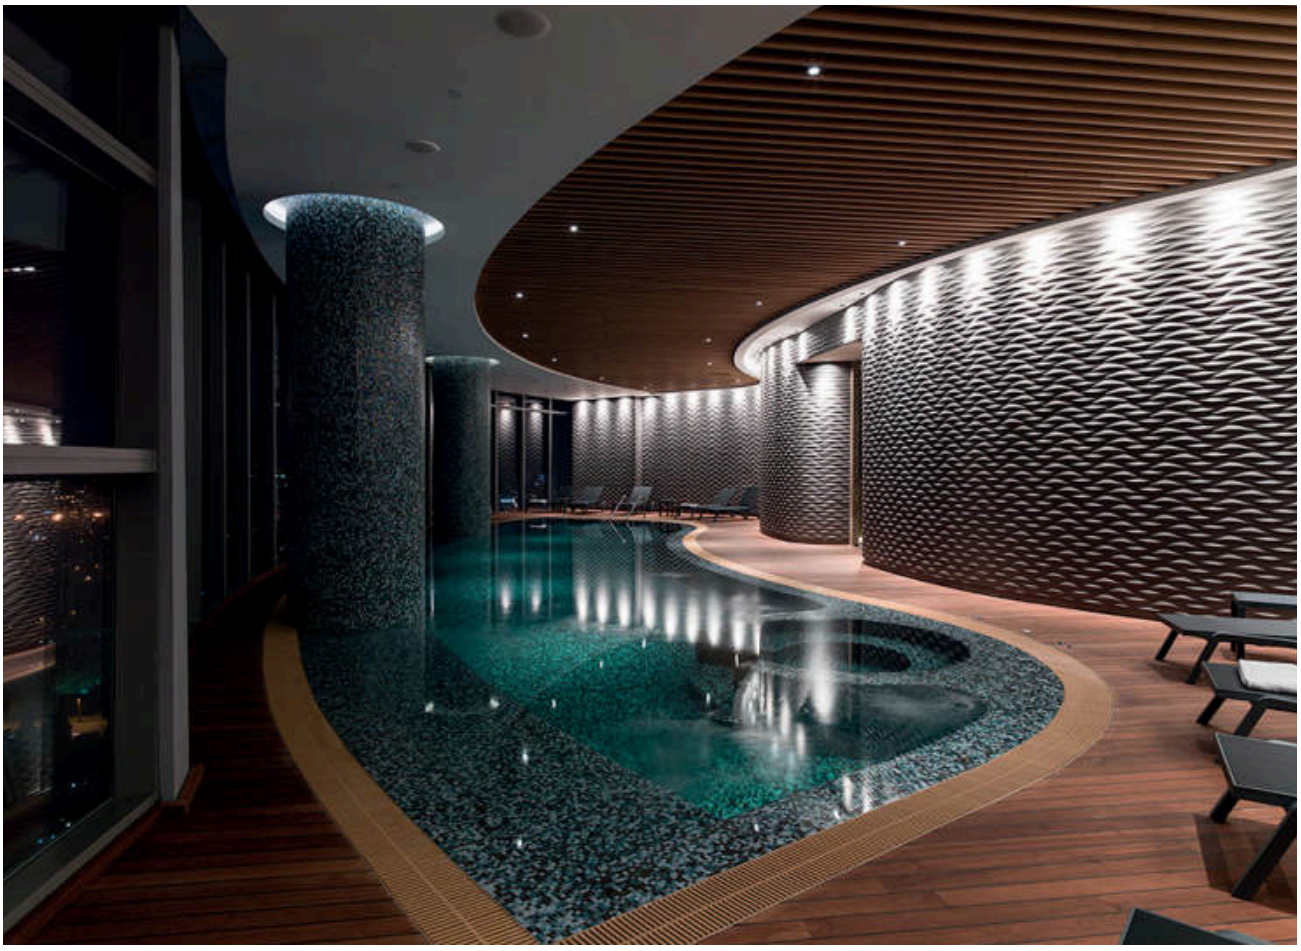


DECATHLON LED DOWNLIGHT
Class III IP65 IK10

Available in any of these RAL colors

9016 9005 7016 7004 1015

The Decathlon LED Downlight is specially designed to deliver high output LED light to indoors and outdoors using CREE LEDs. This downlight is the choice for lighting applications where high luminous-flux output is required from a single, small point source. The Decathlon is slightly wider and deeper than the Marathon giving a different look to the fixture, but the same output. A combination of high color rendition of over 80, several different color temperatures and several degree reflectors and lenses allow the use in a wide range of applications such as museums, hospitals, hotel rooms, dormitories, corridors, shops, and balconies. The shallow fixture depths allow for installation into most ceilings and applications. Non-dimmable drivers come standard with the Downlights, but 1-10V dimmable and DALI drivers are available on request. An ample heat sink is provided for to allow for the lifetime of L70 = 50,000 hours.

Body
Die cast aluminium designed to be heat sink
Cover
Die cast aluminium RAL9002 (available in other RAL colors as well as chrome or gold on request)
Diffuser
Clear of frosted tempered Glass
Springs
Stainless steel for mounting in ceilings or 1-25 mm
(with plastic covers for the Marathon 2 Downlight)
Cable
0.5 m exiting top of fixture
Gear
Non-Dimmable electronic LED driver (1-10V Dimmable and DALI drivers available on request)

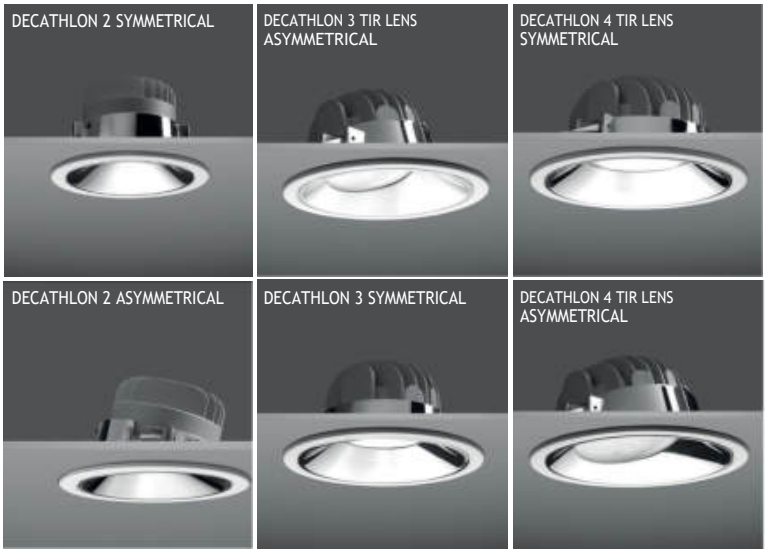

Directional Downlight



Application
These fixtures give a narrow to wide beam asymmetrical light output to walls, paintings, corridors and shop displays. The die cast aluminium body has a fixed built in tilt to allow for proper heat dissipation on the LEDs that can run up to 700mA.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.





DECATHLON

LED DOWNLIGHT
Class III IP65 IK10

Available in any of these RAL colors

9016 9005 7016 7004 1015





COB CREE LED (350-700mA)

Reflector : 10°, 23°, 38° Aluminium-Coated Polycarbonate Reflector

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Gear : 240V Non-Dimmable Driver


(1-10V Dimmable Driver & DALI Driver available on request)

Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm

Cable : 0,5 m 2x0,75 mm H03 VV-F

DECATHLON 2 SYMMETRICAL







Power	Kelvin	Real Lumen Output	Lens	Code No
13W 350mA	2700 K	1235 lm	10°,23°,38°	260201
13W 350mA	3000 K	1235 lm	10°,23°,38°	260202
13W 350mA	4000 K	1259 lm	10°,23°,38°	260203
18W 500mA	2700 K	1710 lm	10°,23°,38°	260211
18W 500mA	3000 K	1710 lm	10°,23°,38°	260212
18W 500mA	4000 K	1779 lm	10°,23°,38°	260213

DECATHLON 2 ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Lens	Code No
13W 350mA	2700 K	1235 lm	10°,23°,38°	260231
13W 350mA	3000 K	1235 lm	10°,23°,38°	260232
13W 350mA	4000 K	1259 lm	10°,23°,38°	260233
18W 500mA	2700 K	1710 lm	10°,23°,38°	260241
18W 500mA	3000 K	1710 lm	10°,23°,38°	260242
18W 500mA	4000 K	1779 lm	10°,23°,38°	260243

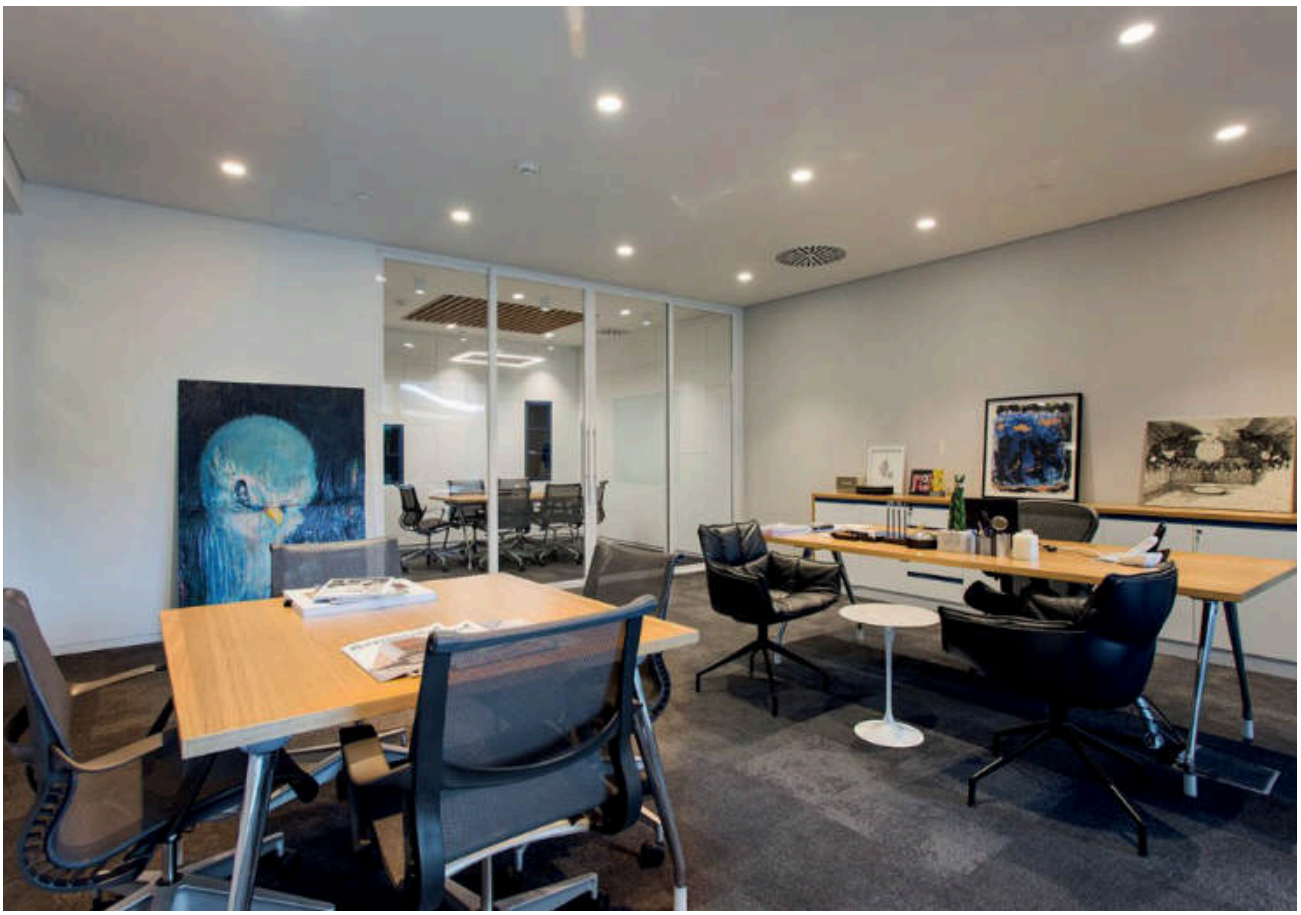




EMFA


DECATHLON

TIR LENS LED DOWNLIGHT
Class II IP65 IK10

Available in any of these RAL colors

9016 9005 7016 7004 1015





COB CREE LED (350-700mA)

Reflector : 10°, 20°, 30° Aluminium-Coated Polycarbonate Reflector

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Gear : 240V Non-Dimmable Driver


(1-10V Dimmable Driver & DALI Driver available on request)

Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm

Cable : 0,5 m 2x0,75 mm H03 VV-F

DECATHLON 3 SYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,20°,30°	266002
11W LED	3000 K	1045 lm	10°,20°,30°	266001
11W LED	4000 K	1065 lm	10°,20°,30°	266003
18W LED	2700 K	1710 lm	10°,20°,30°	266022
18W LED	3000 K	1710 lm	10°,20°,30°	266021
18W LED	4000 K	1779 lm	10°,20°,30°	266023

DECATHLON 3 ASYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	10°,20°,30°	266102
11W LED	3000 K	1045 lm	10°,20°,30°	266101
11W LED	4000 K	1065 lm	10°,20°,30°	266103
18W LED	2700 K	1710 lm	10°,20°,30°	266122
18W LED	3000 K	1710 lm	10°,20°,30°	266121
18W LED	4000 K	1779 lm	10°,20°,30°	266123

DECATHLON 4 SYMMETRICAL






Power	Kelvin	Real Lumen Output	Lens	Code No
25W LED	2700 K	2375 lm	10°,20°,30°	267002
25W LED	3000 K	2375 lm	10°,20°,30°	267001
25W LED	4000 K	2422 lm	10°,20°,30°	267003
32W LED	2700 K	3040 lm	10°,20°,30°	267022
32W LED	3000 K	3040 lm	10°,20°,30°	267021
32W LED	4000 K	3100 lm	10°,20°,30°	267023

DECATHLON 4 ASYMMETRICAL





Power	Kelvin	Real Lumen Output	Lens	Code No
25W LED	2700 K	2375 lm	10°,20°,30°	267102
25W LED	3000 K	2375 lm	10°,20°,30°	267101
25W LED	4000 K	2422 lm	10°,20°,30°	267103
32W LED	2700 K	3040 lm	10°,20°,30°	267122
32W LED	3000 K	3040 lm	10°,20°,30°	267121
32W LED	4000 K	3100 lm	10°,20°,30°	267123



TRIATHLON

LED DOWNLIGHT
Class II IP55 IK08

Available in any of these RAL colors

9016 9005 7016 7004 1015

The Triathlon LED Downlight is specially designed to provide highest energy efficiency in general lighting applications. Using latest LED technology in combination with special plastic moulding and paint application allows for around 90lm/W lighting output. The highly efficient diffuser provides a completely homogenous light output. The simple installation method allows for easy installation into ceilings from 1-25mm thickness. One can choose from three compact sizes, 120mm, 150mm, and 175mm to achieve the desired lighting level.




Body
Die cast aluminium
Paint
Electrostatic powder paint RAL 9016 (available in other RAL colors)
Diffuser
High efficiency frosted acrylic diffuser with 90° beam angle
Springs
Steel for mounting in ceilings of 1-25mm thickness
Gear
Non-Dimmable electronic LED driver (1-10V Dimmable and DALI drivers available on request)
Cable
0.5m exiting from top of fixture

Downlight




Application
Wide beam symmetrical lighting for general lighting such as museums, hospitals, hotel rooms, dormitories, corridors, shops, and balconies.



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 4 standard paint colors, 3 white tones, 3 wattages, and 3 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

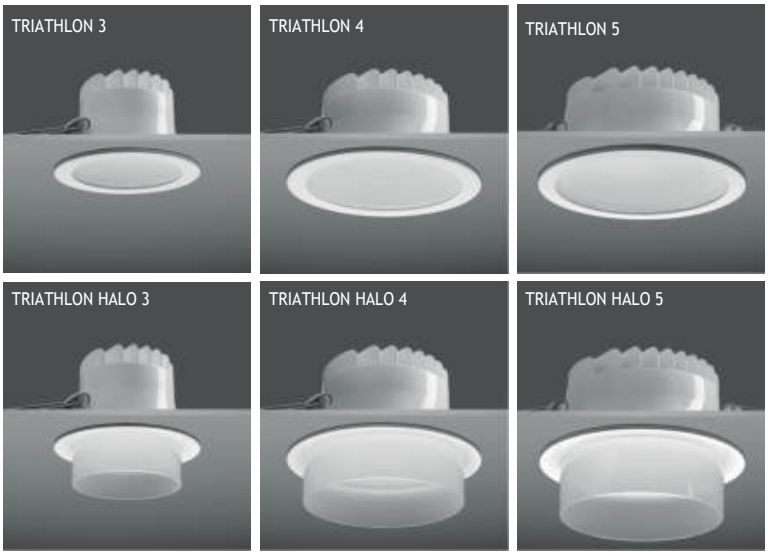

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

TRIATHLON

LED DOWNLIGHT
Class II IP55 IK08

Available in any of these RAL colors

9016 9005 7016 7004 1015



Osram SMD LEDs; over 110lm/W

Reflector : 90°

Diffuser : High efficiency frosted acrylic diffuser with 90° beam angle


Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver & DALI Driver available on request)

Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm

Cable : 0,5 m 2x0,75 mm H03 VV-F

TRIATHLON 3






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	90°	268301
6W LED	3000 K	570 lm	90°	268302
8W LED	2700 K	760 lm	90°	268311
8W LED	3000 K	760 lm	90°	268312
10W LED	2700 K	950 lm	90°	268321
10W LED	3000 K	950 lm	90°	268322

TRIATHLON 4






Power	Kelvin	Real Lumen Output	Lens	Code No
11W LED	2700 K	1045 lm	90°	268401
11W LED	3000 K	1045 lm	90°	268402
16W LED	2700 K	1520 lm	90°	268411
16W LED	3000 K	1520 lm	90°	268412
20W LED	2700 K	1900 lm	90°	268421
20W LED	3000 K	1900 lm	90°	268422

TRIATHLON 5





Power	Kelvin	Real Lumen Output	Lens	Code No
16W LED	2700 K	1520 lm	90°	268501
16W LED	3000 K	1520 lm	90°	268502
24W LED	2700 K	2280 lm	90°	268511
24W LED	3000 K	2280 lm	90°	268512
31W LED	2700 K	2945 lm	90°	268521
31W LED	3000 K	2945 lm	90°	268522
40W LED	2700 K	3800 lm	90°	268531
40W LED	3000 K	3800 lm	90°	268532

EMFA

TRIATHLON HALO

LED DOWNLIGHT
Class II IP55 IK08

Available in any of these RAL colors

9016 9005 7016 7004 1015



Osram SMD LEDs

Reflector : 90°

Diffuser : High efficiency frosted acrylic diffuser with 90° beam angle


Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver & DALI Driver available on request)

Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm

Cable : 0,5 m 2x0,75 mm H03 VV-F

TRIATHLON HALO 3






Power	Kelvin	Real Lumen Output	Lens	Code No
6W 350mA	2700 K	570 lm	90°	269301
6W 350mA	3000 K	570 lm	90°	269302
8W 500mA	2700 K	760 lm	90°	269311
8W 500mA	3000 K	760 lm	90°	269312
10W 700mA	2700 K	950 lm	90°	269321
10W 700mA	3000 K	950 lm	90°	269322

TRIATHLON HALO 4






Power	Kelvin	Real Lumen Output	Lens	Code No
11W 350mA	2700 K	1045 lm	90°	269401
11W 350mA	3000 K	1045 lm	90°	269402
16W 500mA	2700 K	1520 lm	90°	269411
16W 500mA	3000 K	1520 lm	90°	269412
20W 700mA	2700 K	1900 lm	90°	269421
20W 700mA	3000 K	1900 lm	90°	269422

TRIATHLON HALO 5





Power	Kelvin	Real Lumen Output	Lens	Code No
16W 350mA	2700 K	1520 lm	90°	269501
16W 350mA	3000 K	1520 lm	90°	269502
24W 500mA	2700 K	2280 lm	90°	269511
24W 500mA	3000 K	2280 lm	90°	269512
31W 700mA	2700 K	2945 lm	90°	269521
31W 700mA	3000 K	2945 lm	90°	269522

BELKIS

RECESSED FIXTURES
Downlights (For False Ceiling)
Class III IP67 IK10





LED LAMP

Lampholder : Gu4 / Gu10 / E27


Reflector : -

Diffuser : 6 mm Tempered Glass
(8mm Tempered Glass for BELKIS 5)


Transformer is not included.

Remote transformer should be used.

BELKIS 1








Power	Lampholder	Class	Code No Round	Square
12V Led Lamp	Gu4	I	321101	321201

BELKIS 2








Power	Lampholder	Class	Code No Round	Square
Led Lamp	Gu10	I	323121	323221

BELKIS 5








Power	Lampholder	Class	Code No Round	Square
PAR30 Led Lamp	E27	I	325111	325211

EMFA

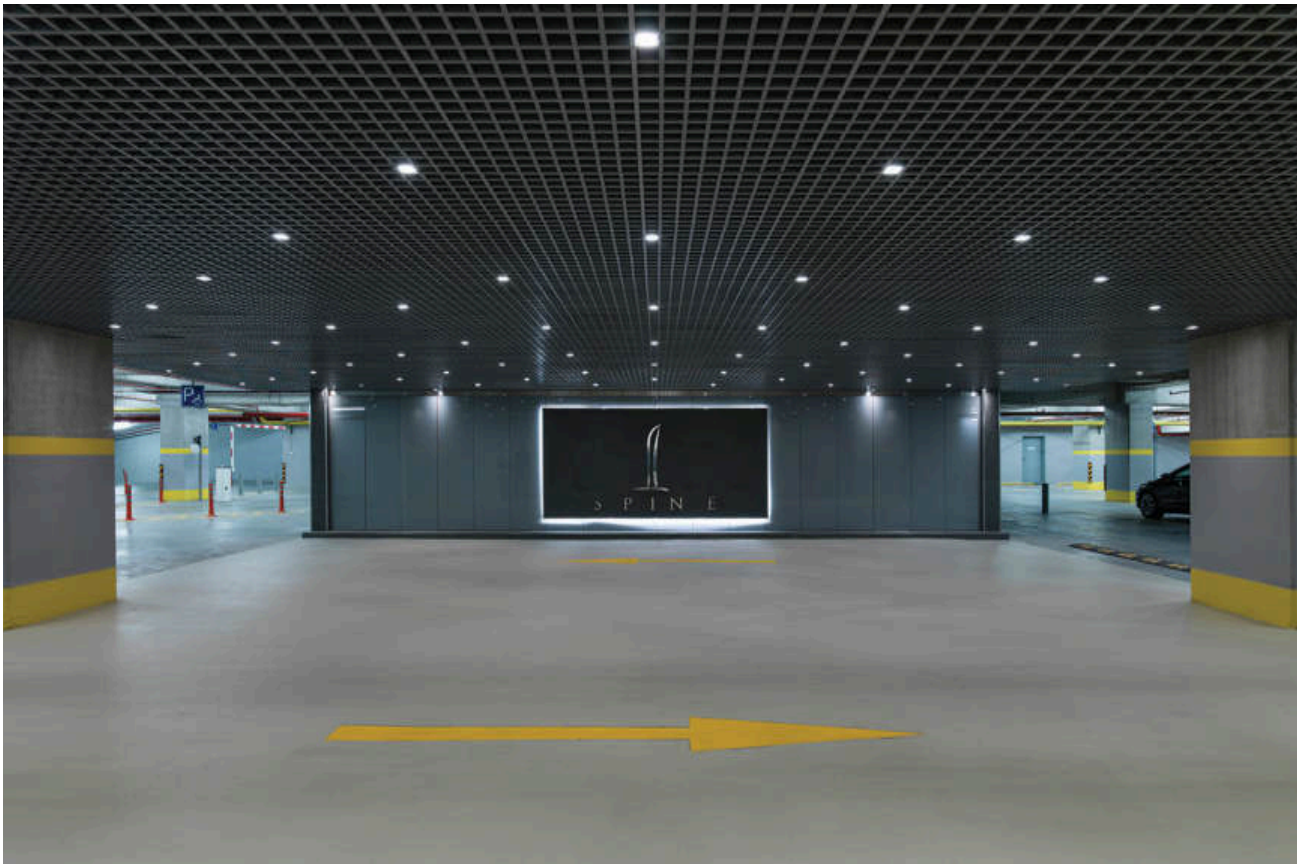
SPINE

DYO DOWNLIGHT FIXTURES IP20

Available in any of these RAL colors

9016 9005 7016 7004 1015





COB LED

Class : II


Lampholder : Gu10

Reflector : -

Diffuser : -

DYO SINGLE






Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
6W LED	2700 K	570 lm	133304	133324
6W LED	3000 K	570 lm	133301	133321
6W LED	4000 K	581 lm	133302	133322
6W LED	6000 K	593 lm	133303	133323
8W LED	2700 K	760 lm	133314	133334
8W LED	3000 K	760 lm	133311	133331
8W LED	4000 K	774 lm	133312	133332
8W LED	6000 K	790 lm	133313	133333

Power	Glass	Lampholder	Class	Code No Fixed	Code No Adjustable
Led Lamp	Without Glass	Gu10	II	133111	133131
Led Lamp	With Glass	Gu10	II	133211	133231


DYO TWIN





Power	Kelvin	Real Lumen Output	Code No Fixed	Code No Adjustable
2x6W LED	2700 K	1140 lm	133404	133424
2x6W LED	3000 K	1140 lm	133401	133421
2x6W LED	4000 K	1162 lm	133402	133422
2x6W LED	6000 K	1186 lm	133403	133423
2x8W LED	2700 K	1520 lm	133414	133434
2x8W LED	3000 K	1520 lm	133411	133431
2x8W LED	4000 K	1548 lm	133412	133432
2x8W LED	6000 K	1580 lm	133413	133433

EMFA

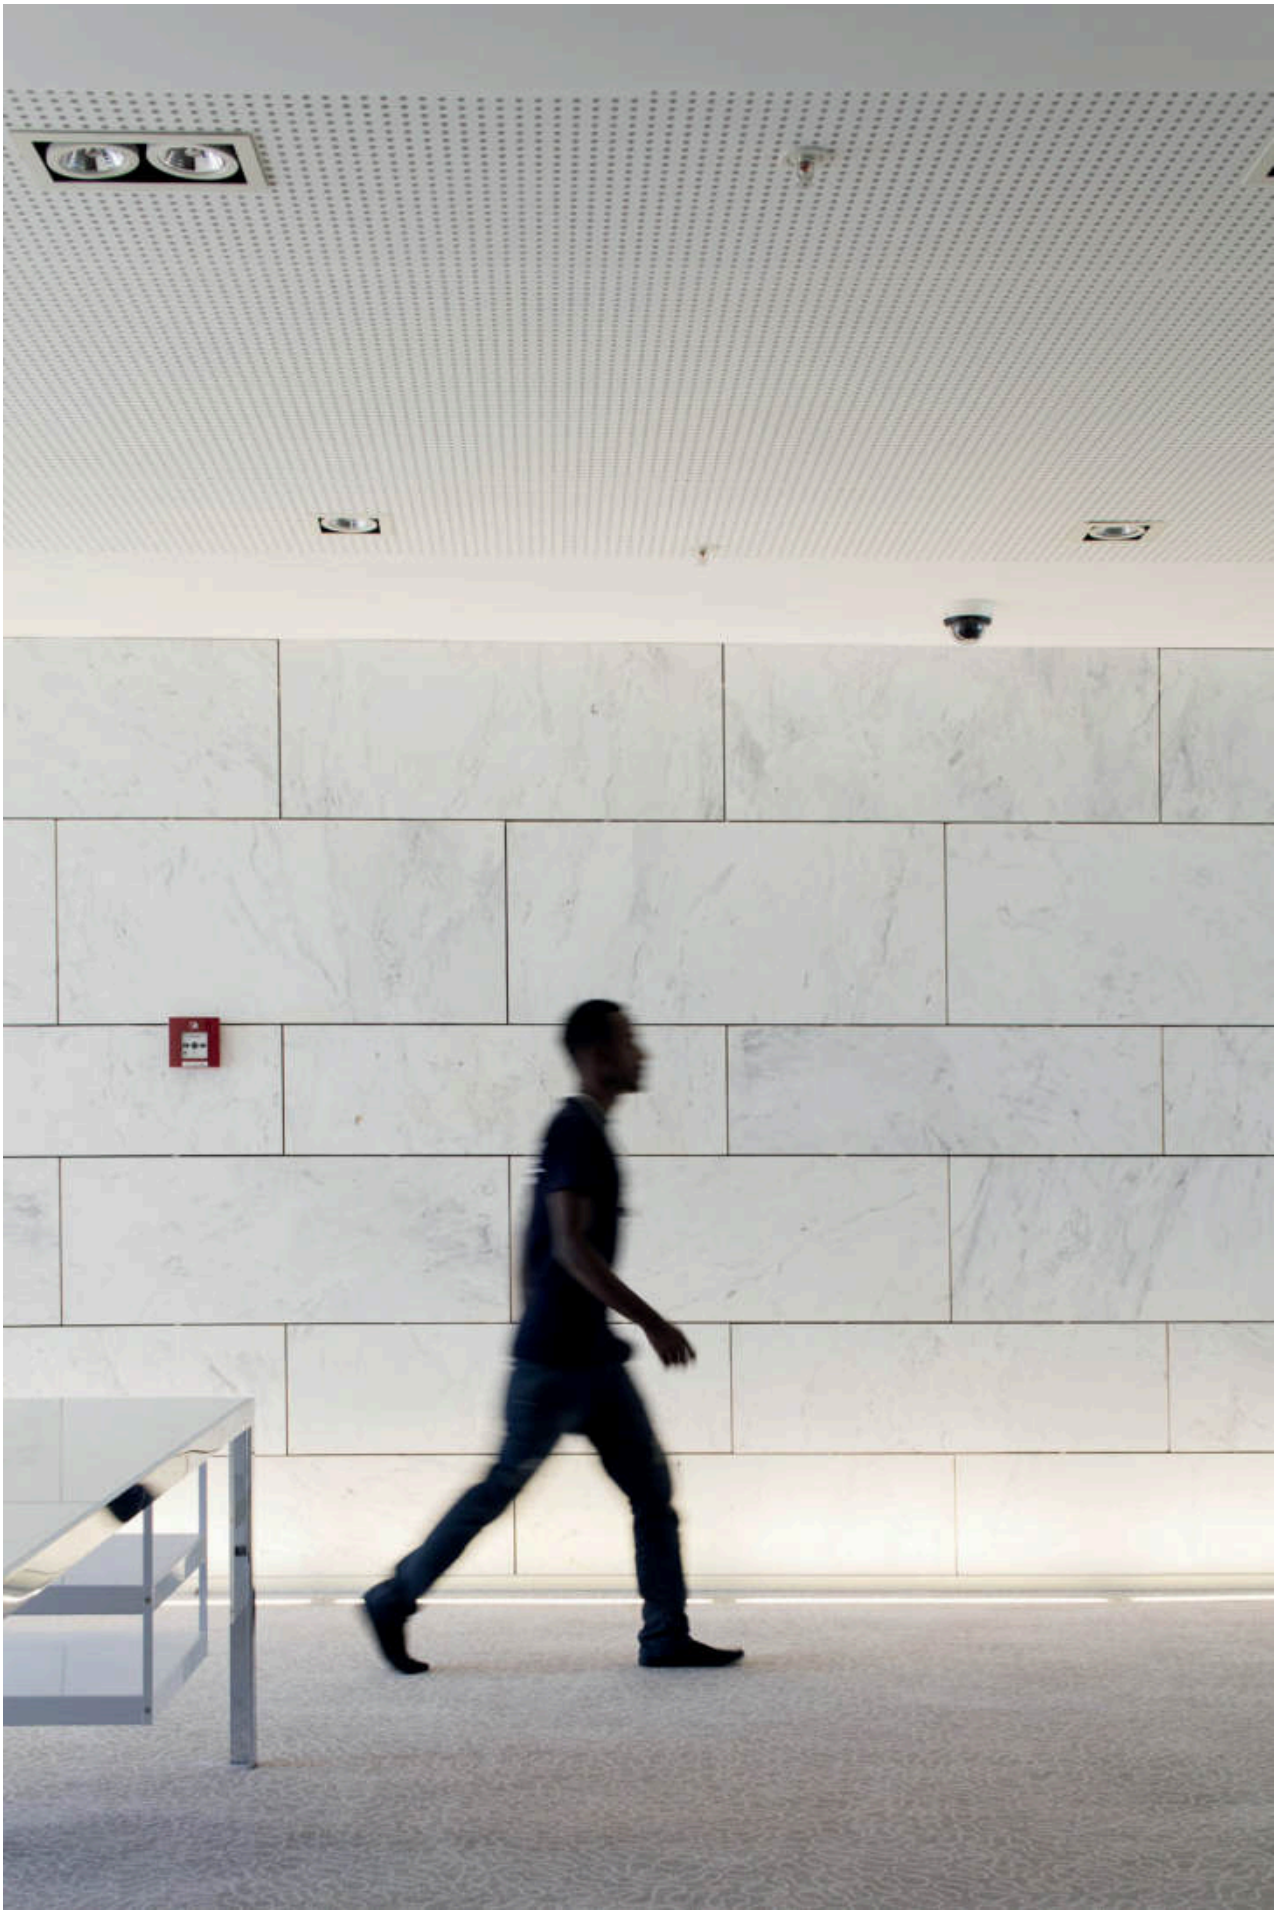

CUNDA / PATARA

RECESSED INDOOR CRADLE FIXTURES IP20

Patara Single



Patara Twin



Cunda




Outer Frame
Steel
Cradle Frame
Die cast aluminium
Paint
Electrostatic powder

Class : I
Lampholder : E27
Reflector : -
Diffuser : -

CUNDA ROUND






Power	Lampholder	Class	Code No
PAR30 Led Lamp	E 27	I	419111

PATARA SINGLE 2 x 12V 50W







Power	Lampholder	Class	Code No Round	Code No Square
PAR 30 Led Lamp	E 27	I	420111	420211

EMFA

MILET HOLE

SPOT DOWNLIGHT
IP20

Available in any of these RAL colors

9016 9005 7016 7004 1015



Body
Aluminium
Frame
Steel
Holding Force
Magnetism, no screws
for easy assembly
and maintenance
Spring
Spiral Inox
Automatically adjustable to the
thickness of false ceiling
Special Feature
Adjustable lamp angle

LED

Lampholder : Gu10


Reflector : -

Diffuser : -




HONEYCOMB FOR MILET HOLE SPOT DOWNLIGHT
Code No: 953961





Power	Lampholder	Code No
Led Lamp	Gu10	113401





Power	Kelvin	Real Lumen Output	Lens	Code No Fixed	Code No Adjustable
6W LED	2700 K	570 lm	10°,38°,60°	113424	113444
6W LED	3000 K	570 lm	10°,38°,60°	113421	113441
6W LED	4000 K	581 lm	10°,38°,60°	113422	113442
6W LED	6000 K	593 lm	10°,38°,60°	113423	113443
8W LED	2700 K	760 lm	10°,38°,60°	113434	113454
8W LED	3000 K	760 lm	10°,38°,60°	113431	113451
8W LED	4000 K	774 lm	10°,38°,60°	113432	113452
8W LED	6000 K	790 lm	10°,38°,60°	113433	113453





SQUARE

SURFACE MOUNTED CEILING FIXTURES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered glass or acrylic
Gaskets
Silicone
Connection
IP connection box







COB LED or Power LEDs


Voltage : 240V A.C with integrated Driver
(24V AC or DC on request)

Diffuser : Acrylic / Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 mm H03 VV-F

SQUARE DOT






Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	289043
6W LED	3000 K	570 lm	289041
6W LED	4000 K	581 lm	289042
11W LED	2700 K	1045 lm	289003
11W LED	3000 K	1045 lm	289001
11W LED	4000 K	1065 lm	289002

SQUARE DIFFUSE GLASS






Power	Kelvin	Real Lumen Output	Code No
6W LED	2700 K	570 lm	289013
6W LED	3000 K	570 lm	289011
6W LED	4000 K	581 lm	289012
11W LED	2700 K	1045 lm	289053
11W LED	3000 K	1045 lm	289051
11W LED	4000 K	1065 lm	289052

SQUARE





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	289024
6W LED	3000 K	570 lm	10°,25°,40°	289021
6W LED	4000 K	581 lm	10°,25°,40°	289022
6W LED	6000 K	593 lm	10°,25°,40°	289023
11W LED	2700 K	1045 lm	10°,20°,30°	289031
11W LED	3000 K	1045 lm	10°,20°,30°	289032
11W LED	4000 K	1065 lm	10°,20°,30°	289033
11W LED	6000 K	1088 lm	10°,20°,30°	289034

EMFA

MARATHON 2 GLASS

SURFACE MOUNTED CEILING FIXTURES
Class I IP65

Glass available in these pastel colors

Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered glass
Gaskets
Silicone
Connection
IP connection box






COB LED (350-500mA)


Reflector : 10°, 23°, 38° Aluminium-Coated Polycarbonate Reflector
Diffuser : Clear Glass 8 mm (Frosted Glass on request)
Gear : 240V Non-Dimmable Driver
(1-10V Dimmable Driver & DALI Driver available on request)
Springs : Plastic covered Stainless Steel for mounting in ceilings of 1-25 mm
Cable : 0,5 m 2x0,75 mm H03 VV-F





Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,23°,38°	260301
3W LED	3000 K	285 lm	10°,23°,38°	260302
3W LED	4000 K	290 lm	10°,23°,38°	260303
11W LED	2700 K	1045 lm	10°,23°,38°	260333
11W LED	3000 K	1045 lm	10°,23°,38°	260331
11W LED	4000 K	1065 lm	10°,23°,38°	260332





Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,23°,38°	260402
3W LED	3000 K	285 lm	10°,23°,38°	260401
3W LED	4000 K	290 lm	10°,23°,38°	260403
11W LED	2700 K	1045 lm	10°,23°,38°	260433
11W LED	3000 K	1045 lm	10°,23°,38°	260431
11W LED	4000 K	1065 lm	10°,23°,38°	260432

EMFA

DECATHLON 3

SURFACE MOUNTED CEILING FIXTURES
Class I IP55

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015




Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered glass
Gaskets
Silicone
Connection
IP connection box


POWER LED

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : Clear Glass with painted circumference 8 mm (Frosted Glass on request)
Cable : Potted 5 m 3x0,75 H03 VV-F





Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	266204
6W LED	3000 K	570 lm	10°,25°,40°	266201
6W LED	4500 K	581 lm	10°,25°,40°	266202
6W LED	6000 K	612 lm	10°,25°,40°	266203
12W LED	2700 K	1140 lm	10°,25°,40°	266304
12W LED	3000 K	1140 lm	10°,25°,40°	266301
12W LED	4500 K	1162 lm	10°,25°,40°	266302
12W LED	6000 K	1224 lm	10°,25°,40°	266303

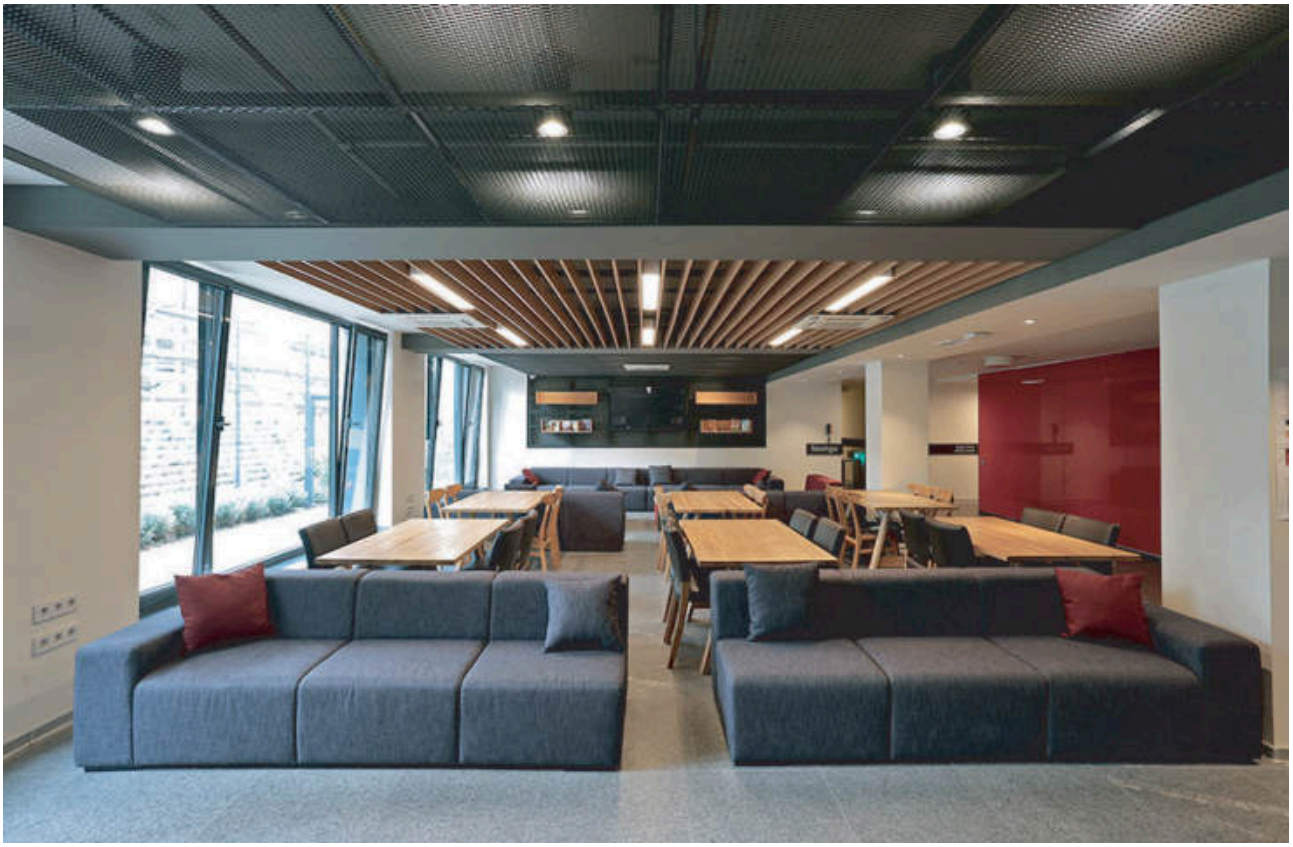



BELKIS 2

SURFACE MOUNTED CEILING FIXTURES
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Paint
Electrostatic powder
Bracket
Die cast aluminium
Diffusers
Tempered glass
Gaskets
Silicone
Connection
IP connection box




COB LED

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : Clear Glass with painted circumference 8 mm (Frosted Glass on request)
Cable : Potted 5 m 3x0,75 H03 VV-F

Single color LED options upon request are ;
Blue Amber Green Red





Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	435004
3W LED	3000 K	285 lm	10°,25°,40°	435001
3W LED	4500 K	290 lm	10°,25°,40°	435002
3W LED	6000 K	296 lm	10°,25°,40°	435003
9W LED	2700 K	855 lm	10°,25°,40°	435014
9W LED	3000 K	855 lm	10°,25°,40°	435011
9W LED	4500 K	872 lm	10°,25°,40°	435012
9W LED	6000 K	890 lm	10°,25°,40°	435013



BELKIS

SURFACE MOUNTED CEILING FIXTURES
Class I IP44

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



POWER LED, LED LAMP or METAL HALIDE

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)

Lens : 10°, 20°, 25°, 30°, 40°


Diffuser : 4mm Frosted Glass for LED LAMP
Clear Glass with painted circumference 8 mm

Lampholder : G9, Gu10, E27, G12

Cable : Potted 5 m 3x0,75 H03 VV-F

BELKIS 1






Power	Kelvin	Real Lumen Output	Lens	Code No
3W LED	2700 K	285 lm	10°,25°,40°	427004
3W LED	3000 K	285 lm	10°,25°,40°	427001
3W LED	4500 K	290 lm	10°,25°,40°	427002
3W LED	6000 K	296 lm	10°,25°,40°	427003
LED LAMP	G9			335101

BELKIS 2






Power	Kelvin	Real Lumen Output	Lens	Code No
6W COB LED	2700 K	570 lm	10°,20°,30°	427104
6W COB LED	3000 K	570 lm	10°,20°,30°	427101
6W COB LED	4500 K	581 lm	10°,20°,30°	427102
6W COB LED	6000 K	593 lm	10°,20°,30°	427103
LED LAMP	Gu10			336111

BELKIS 5






Power	Kelvin	Real Lumen Output	Lens	Code No
6W LED	2700 K	570 lm	10°,25°,40°	427204
6W LED	3000 K	570 lm	10°,25°,40°	427201
6W LED	4500 K	581 lm	10°,25°,40°	427202
6W LED	6000 K	593 lm	10°,25°,40°	427203
9W LED	2700 K	855 lm	10°,25°,40°	427214
9W LED	3000 K	855 lm	10°,25°,40°	427211
9W LED	4500 K	872 lm	10°,25°,40°	427212
9W LED	6000 K	890 lm	10°,25°,40°	427213
LED LAMP	E27			337121

BELKIS 5 METAL HALIDE





Power	Lampholder	Code No
35W/70W METAL HALIDE	G12	337131

EMFA

BELKIS

SURFACE MOUNTED CEILING FIXTURES
Class I IP44

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015



Voltage : 240V A.C with integrated Driver (24V AC or DC on request)
Diffuser : Acrylic Pipe
Cable : Potted 5 m 3x0,75 H03 VV-F
Lampholder : Gu10

BELKIS 2





Power	Lampholder	Code No
Led Lamp	Gu10	293111

EMFA

BELKIS

RECESSED CEILING FIXTURES
Class I IP44

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015



Voltage : 240V A.C with integrated Driver (24V AC or DC on request)
Diffuser : Acrylic Pipe
Cable : Potted 5 m 3x0,75 H03 VV-F
Lampholder : Gu10 / E27 / G12

BELKIS 2






Power	Lampholder	Code No
Led Lamp	Gu10	296111

BELKIS 5






Power	Lampholder	Code No
Led Lamp	E27	296121

BELKIS 5





Power	Lampholder	Code No
Led Lamp	G12	296131

BERGAMA

SURFACE MOUNTED CEILING FIXTURES
Class I IP20

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015






Voltage : 240V A.C with integrated Driver (24V AC or DC on request)
Reflector : Symmetrical
Cable : Potted 5 m 3x0,75 H03 VV-F
Lampholder : G9 / Gu10

SQUARE






Power	Lampholder	Code No
Led Lamp	G9	360111
Led Lamp	Gu10	360121

ROUND






Power	Lampholder	Code No
Led Lamp	G9	360211
Led Lamp	Gu10	360221

FROSTED GLASS





Power	Lampholder	Code No
Led Lamp	G9	363111

EMFA




Pendants



VUVUZELA PENDANT IP20

Available in any of these RAL colors



Body
Black, gold or silver plated
304 stainless steel
Diffusers
Tempered Glass
Gaskets
Silicone
Mounting
Aluminium
Screws
316L stainless steel




POWER LED

Lamps : 4 x 700 mA (10W) LED
Lens : 40°
Transformer mounting : Remote
Transformer type : Electronic
Gear : 240v non-dimmable driver (1-10v dimmable driver & request)
Cable : 0.5m 2x0.75mm h03 w-f

RECESSED MOUNTED




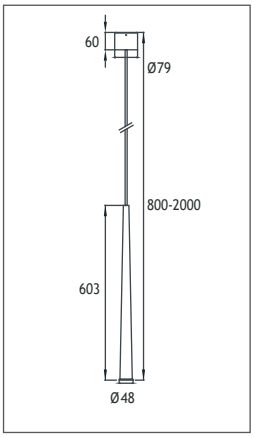


Power	Kelvin	Lens	Real Lumen Output	Code No
10W LED	2700 K	40°	950 lm	117002
10W LED	3000 K	40°	950 lm	117001

SURFACE MOUNTED



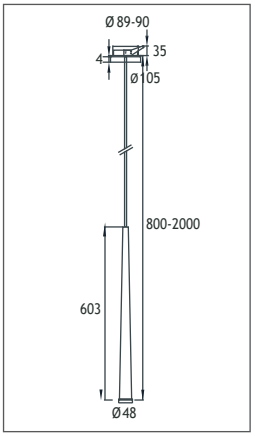

Power	Kelvin	Lens	Real Lumen Output	Code No
10W LED	2700 K	40°	950 lm	117012
10W LED	3000 K	40°	950 lm	117011

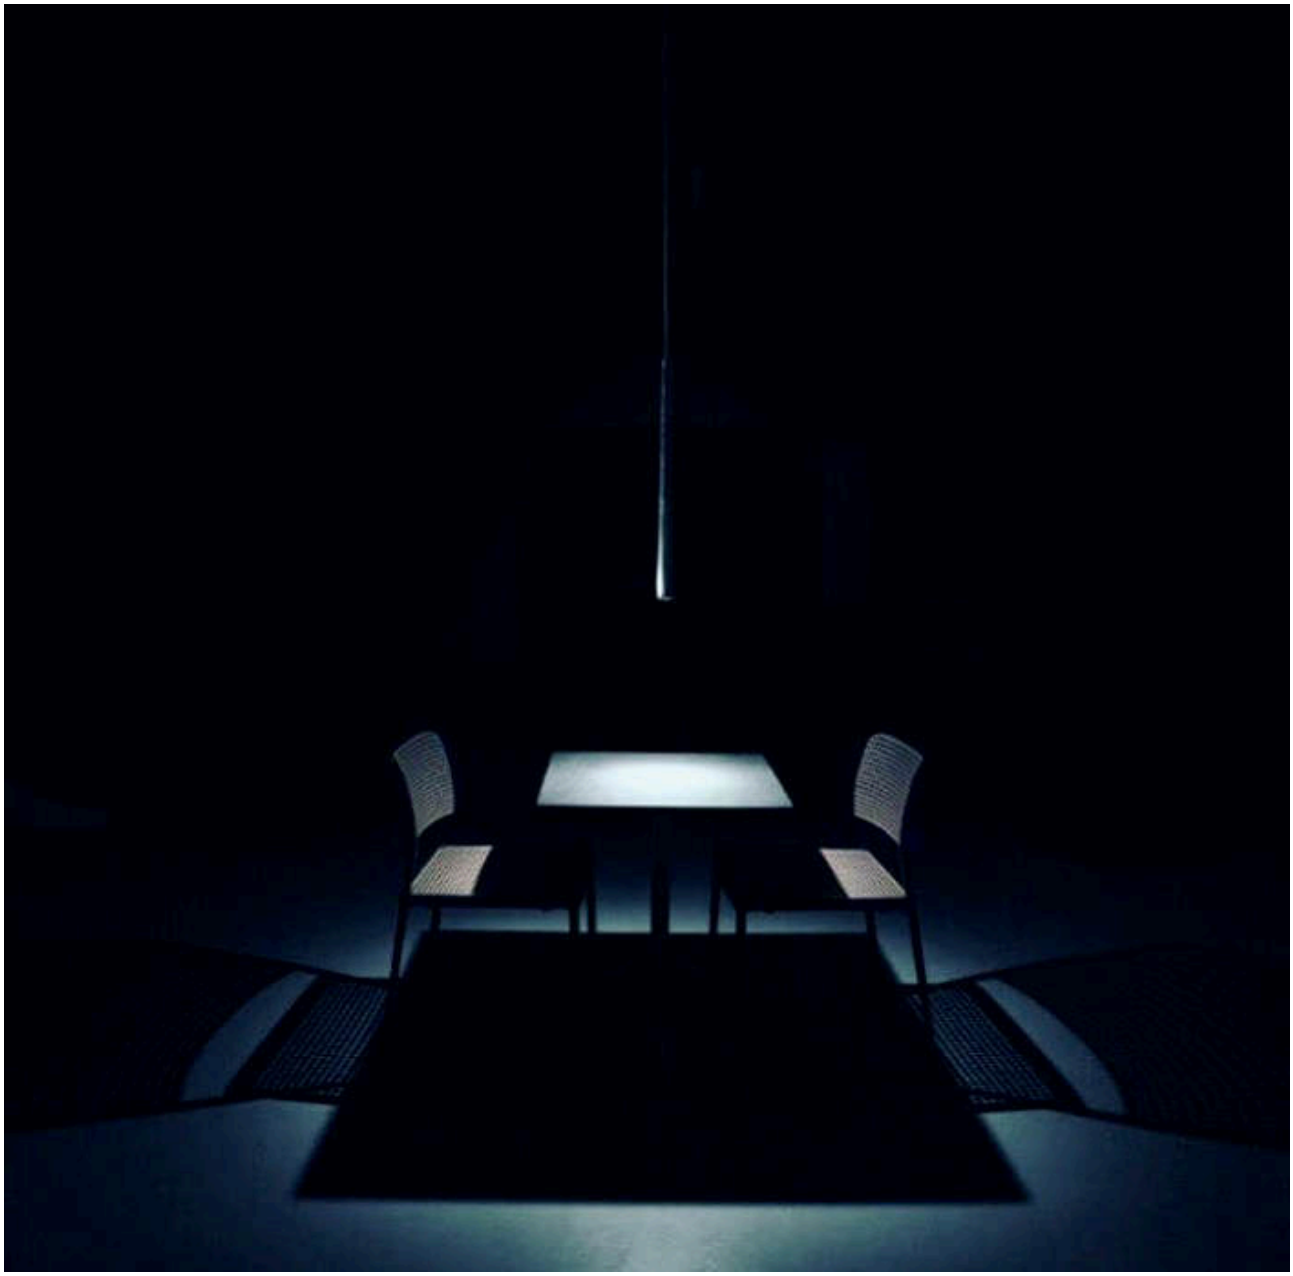


KATENER

HIGH BAY LED FIXTURES
IP65

Body
Die cast aluminium
Cover
Steel
Gaskets
Silicone
Screws
316L stainless steel


Voltage : 240 V A.C with integrated driver (24V AC or DC on request)
Lens : Optical Lens 60°/90°/120°
Cable : Potted 5 m 3x0,75 H03 VV-F






Power	Kelvin	Lens	Real Lumen Output	Code No
100W	2700 K	60°,90°,120°	9500 lm	436003
100W	4500 K	60°,90°,120°	9688 lm	436001
100W	6000 K	60°,90°,120°	9880 lm	436002





Power	Kelvin	Lens	Real Lumen Output	Code No
150W	2700 K	60°,90°,120°	14250 lm	436013
150W	4500 K	60°,90°,120°	14532 lm	436011
150W	6000 K	60°,90°,120°	14820 lm	436012





Power	Kelvin	Lens	Real Lumen Output	Code No
200W	2700 K	60°,90°,120°	19000 lm	436023
200W	4500 K	60°,90°,120°	19376 lm	436021
200W	6000 K	60°,90°,120°	19760 lm	436022



ELEA

PENDANT FIXTURES
Class I IP20 IK07

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


Body
Acrylic
Side Caps
Aluminium
Reflector
Aluminium
Wires
Adjustable Suspending Steel Wire
Diffusers
Acrylic
Gear
Electronic
Mounting Brackets
Aluminium



Voltage : 240 VAC Class II
Diffuser : Acrylic
Lamp : Fluo. G5
Gear : Integrated in tube

ELEA



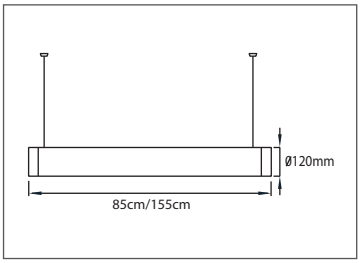

Power	Lampholder	Code No
FLUO 24W	G5	433101
3FLUO 5W	G5	433111

KARIA 2

PENDANT FIXTURES
Class I IP44 IK07

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Voltage : 240V AC with integrated ballast
Diffuser : 4 mm Clear Glass
Lampholder : G5
Ballast : Electronic



KARIA 2




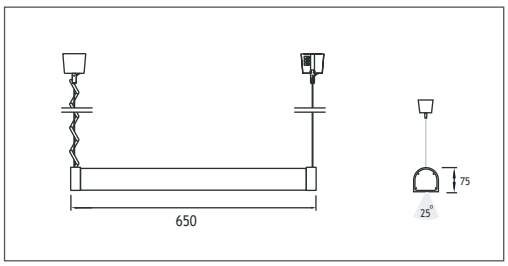

Power	Lampholder	Code No
T5 14W/24W	G5	431401

KARIA 3



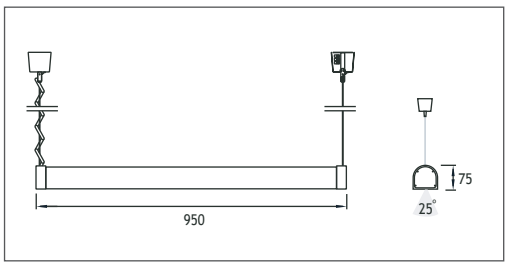

Power	Lampholder	Code No
T5 21W/39W	G5	431501

EMFA

TROY

PENDANT FIXTURES
Class I IP55
(with glass & gasket)


Head
Glass reinforced polyamide 6
Gear box inside
Reflector
Opaque ABS or translucent acrylic






TROY

With Ring




Please use 150... as the first
three digits of the code number

With Suspending Rod And Bracket




Please use 151... as the first
three digits of the code number

With Adjustable Suspending
Steel & Wire Spring Cable



Please use 153... as the first
three digits of the code number

With Adjustable Suspending
Steel Wire & Cable For Mounting On Pipe



Please use 154... as the first
three digits of the code number

2 x Led Lamp

Lampholder : E27	Code No
Translucent	xxx111
Opaque	xxx511

EMFA

Pole Fixtures



TRION LED POLE
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Trion series combines a die-cast aluminium head with an extrusion aluminium pipe to provide a sturdy, outdoor bollard/pole. The fixture is designed to light pathways, landscapes and open spaces. The TRION pole gives light both in the downward and upward direction. The light is very directional and honeycomb louvers can be used to avoid extra glare. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 24W. An optional galvanized steel anchorage kit is available for mounting into concrete.






Head
Die cast aluminium
Diffuser
Tempered Glass
Pipe
Aluminium
Paint
Electrostatic powder






Up



Down



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Trion 1 Single



Trion 1 Twin



Trion 2 Single



Trion 2 Twin



EMFA

TRION LED POLE
Class I IP65 IK10


Available in any of these RAL colors



Led : Power or COB LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : Tempered Clear or Frosted Glass

Trion 1 Single






Power	Kelvin	Real Lumen Output	Lens	200 cm	Code No 250 cm	300 cm
6W LED	2700 K	570 lm	10°,25°,40°	181001	181101	181201
6W LED	3000 K	570 lm	10°,25°,40°	181002	181102	181202
6W LED	4500 K	581 lm	10°,25°,40°	181003	181103	181203
6W LED	6000 K	592 lm	10°,25°,40°	181004	181104	181204
11W LED	2700 K	1045 lm	10°,25°,40°	181011	181111	181211
11W LED	3000 K	1045 lm	10°,25°,40°	181012	181112	181212
11W LED	4500 K	1065 lm	10°,25°,40°	181013	181113	181213
11W LED	6000 K	1087 lm	10°,25°,40°	181014	181114	181214

Trion 1 Twin






Power	Kelvin	Real Lumen Output	Lens	200 cm	Code No 250 cm	300 cm
6W LED	2700 K	570 lm	10°,25°,40°	182001	182101	182201
6W LED	3000 K	570 lm	10°,25°,40°	182002	182102	182202
6W LED	4500 K	581 lm	10°,25°,40°	182003	182103	182203
6W LED	6000 K	592 lm	10°,25°,40°	182004	182104	182204
11W LED	2700 K	1045 lm	10°,25°,40°	182011	182111	182211
11W LED	3000 K	1045 lm	10°,25°,40°	182012	182112	182212
11W LED	4500 K	1065 lm	10°,25°,40°	182013	182113	182213
11W LED	6000 K	1087 lm	10°,25°,40°	182014	182114	182214

Trion 2 Single







Power	Kelvin	Real Lumen Output	Lens	250 cm	Code No 300 cm	350 cm
11W LED	2700 K	1045 lm	10°,25°,40°	183001	183101	183201
11W LED	3000 K	1045 lm	10°,25°,40°	183002	183102	183202
11W LED	4500 K	1065 lm	10°,25°,40°	183003	183103	183203
11W LED	6000 K	1087 lm	10°,25°,40°	183004	183104	183204
24W LED	2700 K	2280 lm	10°,25°,40°	183011	183111	183211
24W LED	3000 K	2280 lm	10°,25°,40°	183012	183112	183212
24W LED	4500 K	2350 lm	10°,25°,40°	183013	183113	183213
24W LED	6000 K	2395 lm	10°,25°,40°	183014	183114	183214

Trion 2 Twin





Power	Kelvin	Real Lumen Output	Lens	250 cm	Code No 300 cm	350 cm
11W LED	2700 K	1045 lm	10°,25°,40°	184001	184101	184201
11W LED	3000 K	1045 lm	10°,25°,40°	184002	184102	184202
11W LED	4500 K	1065 lm	10°,25°,40°	184003	184103	184203
11W LED	6000 K	1087 lm	10°,25°,40°	184004	184104	184204
24W LED	2700 K	2280 lm	10°,25°,40°	184011	184111	184211
24W LED	3000 K	2280 lm	10°,25°,40°	184012	184112	184212
24W LED	4500 K	2350 lm	10°,25°,40°	184013	184113	184213
24W LED	6000 K	2395 lm	10°,25°,40°	184014	184114	184214



For Trion **Anchor** Code No: 953781

EDESSA

LED POLE
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


The Edessa pole series have LED light sources to deliver the desired light effect to streets, squares, bridges and monuments. The series is made of die cast aluminium and painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment (grey, anthracite, black, white, green and beige). The Edessa Pole series have been designed for high efficiency and ease of installation incorporating the latest in LED technology and control systems. The special lens directs the light flow precisely and makes the whole luminaire system efficient. This compact and essential design is made of a combination of aluminium profile and die cast aluminium.





Body
Die cast aluminium
Pipe
Aluminium
Paint
Electrostatic powder
Gearbox Cover
Die cast aluminium
Gaskets
Silicone
Diffuser
Tempered Glass

“Customization” is EMFA’s standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 4 white tones, 3 wattages, and 3 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

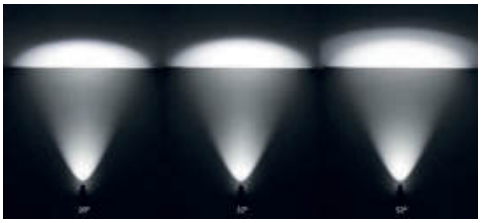

Edessa 2



Edessa 3



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

Thermal Management
All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

EDESSA

LED POLE
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





COB LED

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)


Lens : 10°, 25°, 40° or 60°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2 m 3x1 H03 VV-F

EDESSA 2




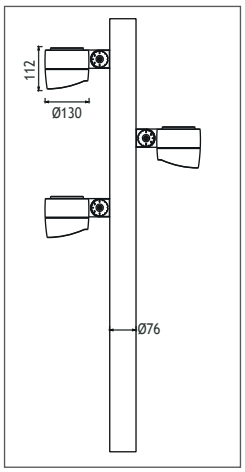


Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
2000mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	185001	185101	185201
2000mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	185002	185102	185202
2000mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	185003	185103	185203
2000mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	185004	185104	185204
2000mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	185031	185131	185231
2000mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	185032	185132	185232
2000mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	185033	185133	185233
2000mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	185034	185134	185234
2000mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	185041	185141	185241
2000mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	185042	185142	185242
2000mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	185043	185143	185243
2000mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	185044	185144	185244

EDESSA 3



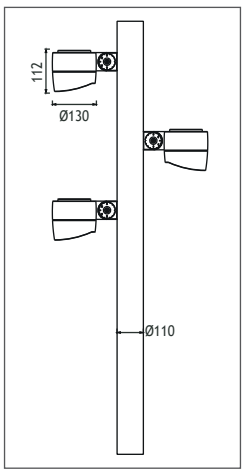

Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
2000mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	186001	186101	186201
2000mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	186002	186102	186202
2000mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	186003	186103	186203
2000mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	186004	186104	186204
2000mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	186031	186131	186231
2000mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	186032	186132	186232
2000mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	186033	186133	186233
2000mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	186034	186134	186234
2000mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	186041	186141	186241
2000mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	186042	186142	186242
2000mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	186043	186143	186243
2000mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	186044	186144	186244





For Edessa | **Anchor** Code No: 953781 | **Honeycomb** Code No: 953782

EDESSA

LED POLE
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





COB LED

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)


Lens : 10°, 25°, 40° or 60°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2 m 3x1 H03 VV-F

EDESSA 2




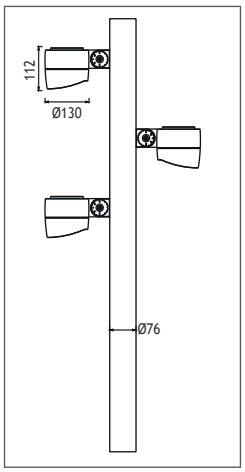


Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
2500mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	185051	185151	185251
2500mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	185052	185152	185252
2500mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	185053	185153	185253
2500mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	185054	185154	185254
2500mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	185011	185111	185211
2500mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	185012	185112	185212
2500mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	185013	185113	185213
2500mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	185014	185114	185214
2500mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	185061	185161	185261
2500mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	185062	185162	185262
2500mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	185063	185163	185263
2500mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	185064	185164	185264

EDESSA 3



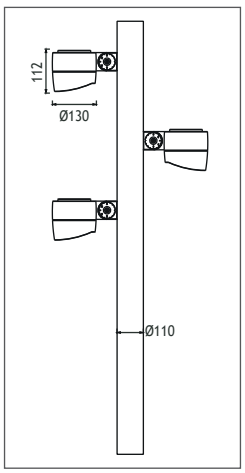

Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
2500mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	186051	186151	186251
2500mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	186052	186152	186252
2500mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	186053	186153	186253
2500mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	186054	186154	186254
2500mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	186011	186111	186211
2500mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	186012	186112	186212
2500mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	186013	186113	186213
2500mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	186014	186114	186214
2500mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	186061	186161	186261
2500mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	186062	186162	186262
2500mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	186063	186163	186263
2500mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	186064	186164	186264





For Edessa

Anchor
Code No: 953781

Honeycomb
Code No: 953782

EMFA

EDESSA

LED POLE
Class I IP65 IK10

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015





COB LED

Voltage : 240V A.C with integrated Driver (24V AC or DC on request)


Lens : 10°, 25°, 40° or 60°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 2 m 3x1 H03 VV-F

EDESSA 2




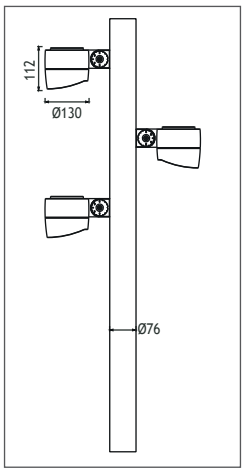


Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
3000mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	185071	185171	185271
3000mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	185072	185172	185272
3000mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	185073	185173	185273
3000mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	185074	185174	185274
3000mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	185081	185181	185281
3000mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	185082	185182	185282
3000mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	185083	185183	185283
3000mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	185084	185184	185284
3000mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	185021	185121	185221
3000mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	185022	185122	185222
3000mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	185023	185123	185223
3000mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	185024	185124	185224

EDESSA 3



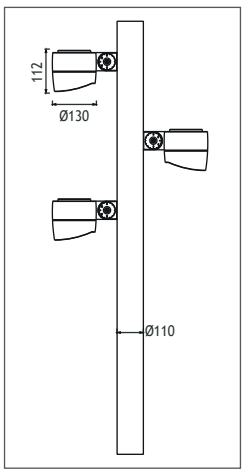

Height	Power	Kelvin	Real Lumen Output	Lens	Code No Single	Twin	Triple
3000mm	18W LED	2700 K	1710 lm	10°,25°,40°,60°	186071	186171	186271
3000mm	18W LED	3000 K	1710 lm	10°,25°,40°,60°	186072	186172	186272
3000mm	18W LED	4500 K	1744 lm	10°,25°,40°,60°	186073	186173	186273
3000mm	18W LED	6000 K	1779 lm	10°,25°,40°,60°	186074	186174	186274
3000mm	22W LED	2700 K	2090 lm	10°,25°,40°,60°	186081	186181	186281
3000mm	22W LED	3000 K	2090 lm	10°,25°,40°,60°	186082	186182	186282
3000mm	22W LED	4500 K	2120 lm	10°,25°,40°,60°	186083	186183	186283
3000mm	22W LED	6000 K	2185 lm	10°,25°,40°,60°	186084	186184	186284
3000mm	26W LED	2700 K	2470 lm	10°,25°,40°,60°	186021	186121	186221
3000mm	26W LED	3000 K	2470 lm	10°,25°,40°,60°	186022	186122	186222
3000mm	26W LED	4500 K	2525 lm	10°,25°,40°,60°	186023	186123	186223
3000mm	26W LED	6000 K	2560 lm	10°,25°,40°,60°	186024	186124	186224





For Edessa | **Anchor** Code No: 953781 | **Honeycomb** Code No: 953782

EMFA

LEON LED POLE
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

EMFA's Leon pole combines a die-cast aluminium head housing an LED unit with an extrusion aluminium pipe. The pole is designed to light pathways, landscapes and open spaces. The Leon Pole gives light only in the downward direction. This avoids any kind of glare and light pollution. The head and pipe are connected by a hidden screw within the pipe. The head contains LEDs that can be powered up to 27W. An optional galvanized steel anchorage kit is available for mounting into concrete. An alternative option is sleeve anchors for mounting onto existing concrete.



Head
Die cast aluminium
Diffusers
Frosted polyamide 6.6
Paint
Electrostatic powder

CIRCULAR LED


Led : Linear LEDs (27W)

Voltage : 240 VAC with integrated driver (12-24 VDC on request)


Diffuser : >80

LEON



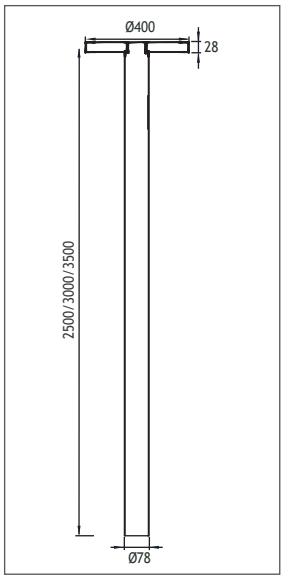

Power	Kelvin	Real Lumen Output	Code No 2500mm	3000mm	3500mm
27W	2700 K	2560 lm	187001	187101	187201
27W	3000 K	2560 lm	187002	187102	187202
27W	4000 K	2610 lm	187003	187103	187203



For Trion **Anchor** Code No: 953781

EMFA



MILET ANI

SIDE ALUM LED POLE
Class I IP65 IK08


EMFA's ANI pole mounted series have been designed for high efficiency and ease of installation incorporating the latest in LED technology and control systems. The special lens directs the light flow precisely and makes the whole luminaire system efficient. This compact and essential design is made of a combination of aluminium profile and die cast aluminium.


Pole
Aluminium profile
Body
Die cast aluminium
Gaskets
Silicone
Diffusers
4 mm Tempered Glass
Screws
316L Stainless Steel
Glands
PG 11





"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

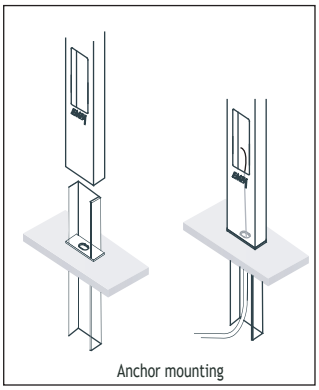

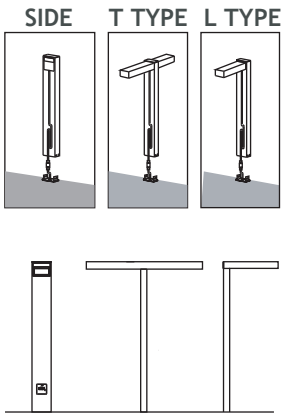

Fuse Box



Anchor



LEDs
Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

ANI 4

ALUM LED POLE
Class I IP65 IK08

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Led : Linear LEDs
Voltage : 240 VAC with integrated driver (12-24 VDC on request)
Diffuser : 4mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80
L.O.R % : %70



SIDE



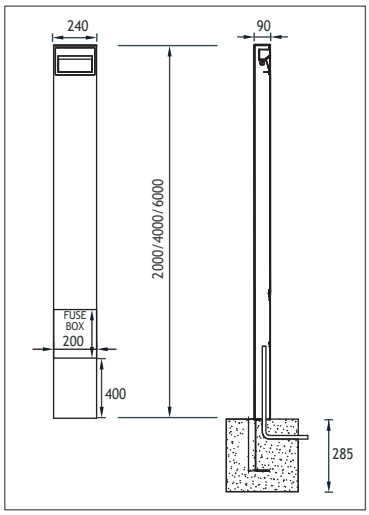

Power	Kelvin	Real Lumen Output	Lens	Code No 2000mm	4000mm	6000mm
24W	2700 K	2280 lm	10°,25°,40°	460003	460103	460203
24W	3000 K	2280 lm	10°,25°,40°	460001	460101	460201
24W	4000 K	2320 lm	10°,25°,40°	460002	460102	460202
36W	2700 K	3420 lm	10°,25°,40°	460013	460113	460213
36W	3000 K	3420 lm	10°,25°,40°	460011	460111	460211
36W	4000 K	3520 lm	10°,25°,40°	460012	460112	460212

ANI 4


ALUM LED POLE
Class I IP65 IK08

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

L TYPE




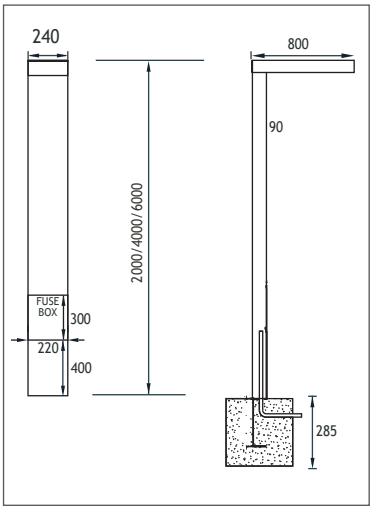

Power	Kelvin	Real Lumen Output	Lens	Code No 2000mm	4000mm	6000mm
24W	2700 K	2280 lm	10°,25°,40°	461003	461103	461203
24W	3000 K	2280 lm	10°,25°,40°	461001	461101	461201
24W	4000 K	2320 lm	10°,25°,40°	461002	461102	461202
36W	2700 K	3420 lm	10°,25°,40°	461013	461113	461213
36W	3000 K	3420 lm	10°,25°,40°	461011	461111	461211
36W	4000 K	3520 lm	10°,25°,40°	461012	461112	461212

T TYPE



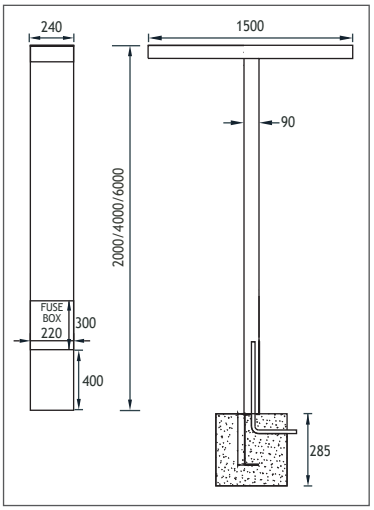

Power	Kelvin	Real Lumen Output	Lens	Code No 2000mm	4000mm	6000mm
2x24W	2700 K	4560 lm	10°,25°,40°	462003	462103	462203
2x24W	3000 K	4560 lm	10°,25°,40°	462001	462101	462201
2x24W	4000 K	4640 lm	10°,25°,40°	462002	462102	462202
2x36W	2700 K	6840 lm	10°,25°,40°	462013	462113	462213
2x36W	3000 K	6840 lm	10°,25°,40°	462011	462111	462211
2x36W	4000 K	7040 lm	10°,25°,40°	462012	462112	462212

EMFA

BELKIS 5

ONE WAY APPLIQUE ON POLE
Class I IP55

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Cover
Die cast aluminium
Paint
Electrostatic powder
Pipe
Extrusion aluminium
Connection
IP connection box
Gaskets
Silicone
Diffusers
Tempered Clear Glass



Lampholder : E27
Reflector : 40°
Diffuser : Clear Glass





Power	Reflector	Lampholder	Code No
PAR30 Led Lamp	40°	E27	295101

GOREME

ACRYLIC POLE
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Pipe
Steel
Body
Die cast aluminium
Cover
Die cast aluminium
Paint
Electrostatic powder
Diffuser
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box





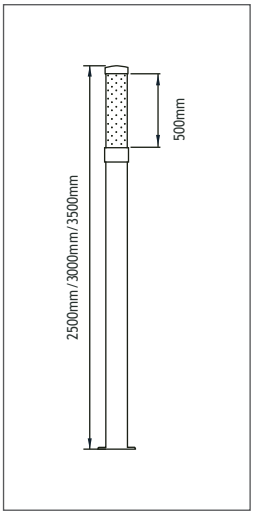

Power	Kelvin	Real Lumen Output	Code No 2500mm	3000mm	3500mm
27W LED	2700 K	2430 lm	295303	295313	295323
27W LED	3000 K	2430 lm	295301	295311	295321
27W LED	4000 K	2673 lm	295302	295312	295322

EMFA

GOREME

ACRYLIC REFLECTOR POLE
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Pipe
Steel
Body
Die cast aluminium
Cover
Die cast aluminium
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box





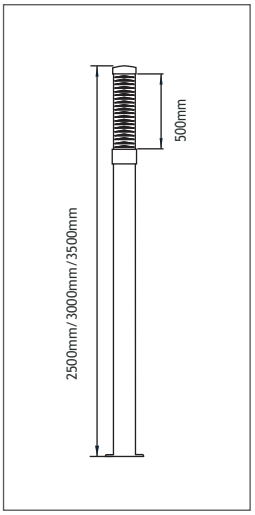

Power	Kelvin	Real Lumen Output	Code No 2500mm	3000mm	3500mm
27W LED	2700 K	2430 lm	295203	295213	295223
27W LED	3000 K	2430 lm	295201	295211	295221
27W LED	4000 K	2673 lm	295202	295212	295222
48W LED	2700 K	4320 lm	295233	295243	295253
48W LED	3000 K	4320 lm	295231	295241	295251
48W LED	4000 K	4752 lm	295232	295242	295252



LPA POLE MOUNTED
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Die cast aluminium
Cover
Spinning aluminium
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box




Code No
A



Code No
B





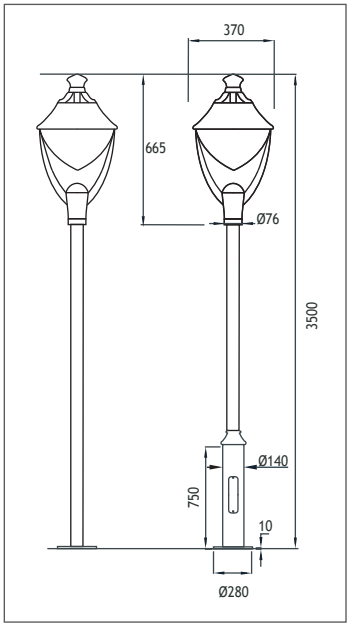

Power	Kelvin	Real Lumen Output	Code No
26W	2700 K	2465 lm	437603
26W	3000 K	2465 lm	437601
26W	6000 K	2560 lm	437602
36W	2700 K	3420 lm	437613
36W	3000 K	3420 lm	437611
36W	6000 K	3557 lm	437612
E27 CFL 65W			437621

LPB POLE MOUNTED
Class I IP65

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


Body
Die cast aluminium
Cover
Spinning aluminium
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box









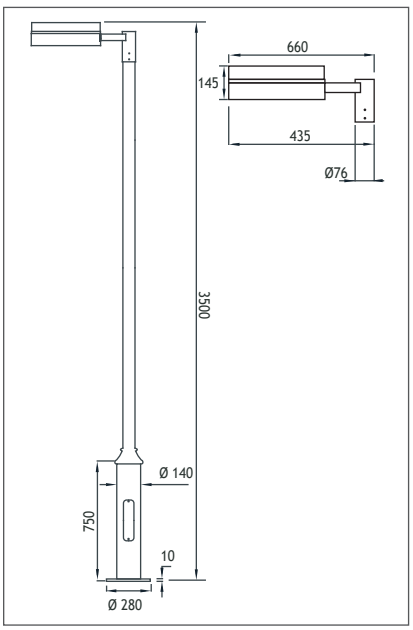

Power	Kelvin	Real Lumen Output	Code No
30W	2700 K	2850 lm	437503
30W	3000 K	2850 lm	437501
30W	6000 K	3135 lm	437502
46W	2700 K	4370 lm	437513
46W	3000 K	4370 lm	437511
46W	6000 K	4807 lm	437512
60W	2700 K	5700 lm	437523
60W	3000 K	5700 lm	437521
60W	6000 K	6270 lm	437522
65W E27 CFL			437531

EMFA

LPC POLE MOUNTED
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015


Pipe
Steel
Body
Die cast aluminium
Cover
Spinning aluminium
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box





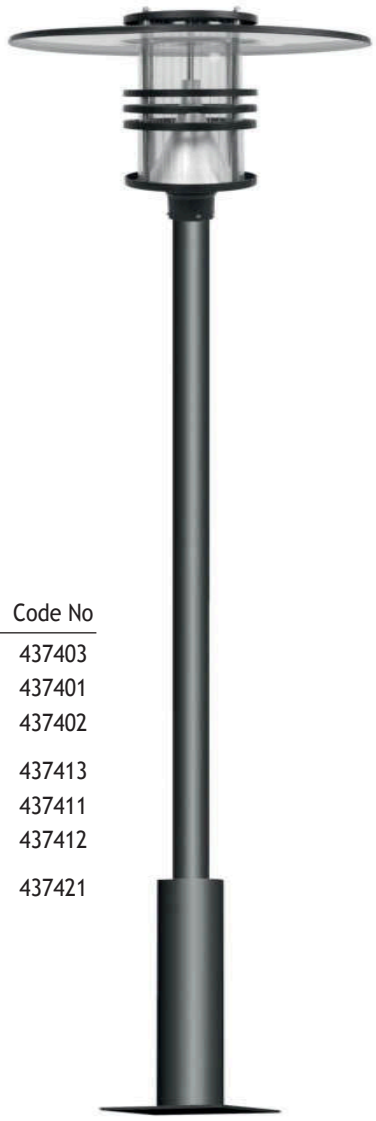



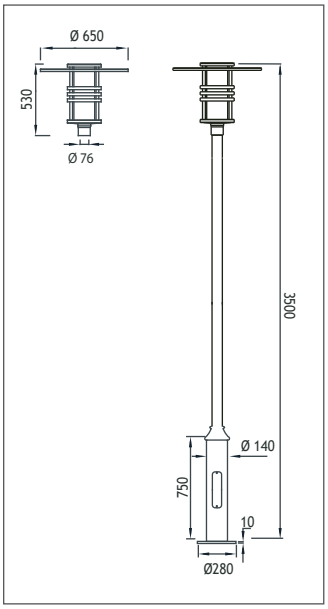

Power	Kelvin	Real Lumen Output	Code No
26W	2700 K	2465 lm	437403
26W	3000 K	2465 lm	437401
26W	6000 K	2560 lm	437402
36W	2700 K	3420 lm	437413
36W	3000 K	3420 lm	437411
36W	6000 K	3557 lm	437412
65W			437421

LPD POLE MOUNTED
Class I IP65

Available in any of these RAL colors


7004 7016 9005 9016 6002 1015

Pipe
Steel
Body
Die cast aluminium
Cover
Spinning aluminium
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box







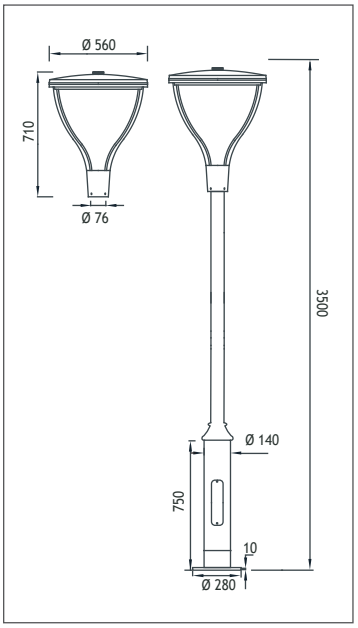

Power	Kelvin	Real Lumen Output	Code No
35W	2700 K	3325 lm	437303
35W	3000 K	3325 lm	437301
35W	6000 K	3657 lm	437302
45W	2700 K	4275 lm	437313
45W	3000 K	4275 lm	437311
45W	6000 K	4702 lm	437312
60W	2700 K	5700 lm	437323
60W	3000 K	5700 lm	437321
60W	6000 K	6270 lm	437322
65W E27 CFL			437331

EMFA

LPE POLE MOUNTED
Class I IP65


Available in any of these RAL colors

7004 7016 9005 9016 6002 1015

Body
Extruded aluminium pole
Paint
Electrostatic powder
Diffusers
Acrylic Glass
Gaskets
Silicone
Connection
IP connection box

L TYPE




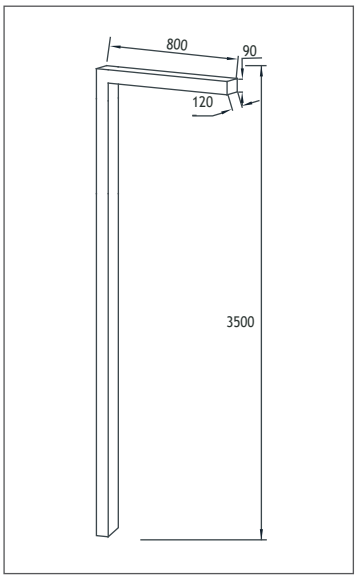

Power	Kelvin	Real Lumen Output	Code No
20W	2700 K	1900 lm	437203
20W	3000 K	1900 lm	437201
20W	6000 K	2090 lm	437202
30W	2700 K	2850 lm	437223
30W	3000 K	2850 lm	437221
30W	6000 K	3135 lm	437222
40W	2700 K	3800 lm	437243
40W	3000 K	3800 lm	437241
40W	6000 K	4180 lm	437242

T TYPE



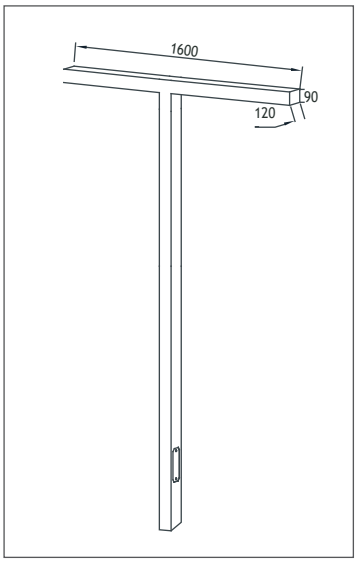

Power	Kelvin	Real Lumen Output	Code No
20W	2700 K	1900 lm	437213
20W	3000 K	1900 lm	437211
20W	6000 K	2090 lm	437212
30W	2700 K	2850 lm	437233
30W	3000 K	2850 lm	437231
30W	6000 K	3135 lm	437232
40W	2700 K	3800 lm	437253
40W	3000 K	3800 lm	437251
40W	6000 K	4180 lm	437252

Fuse Box



Anchor





20mA
Led Fixtures



BELKIS

RECESSED WALK OVER LED FIXTURES
Class II IP67

EMFA's 20mA LED fixtures are ideal for ambiance lighting outdoors and in where only touch of light is required. These fixtures apart from being used as orientation lights, can light steps and paths and highlight walls and columns acrylic are offered to fit the correct location. A choice of lighting or backlighting LEDs is offered to either a directional lighting effect or a lighting glow.



"Customization" is EMFA's standard
EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Glass 6 mm


Standard with 5m 3x0,75 H03 VV-F cable

Available with springs for false ceiling.

Single color LED options upon request are ;
Blue Amber Green Red

BELKIS 1






Power	Code No Inox
9x20mA	418101

BELKIS 1






Power	Code No Inox
1x20mA	418111

BELKIS 2





Power	Code No Inox
18x20mA	418121

EMFA

BELKIS

WALL RECESSED LED FIXTURES
Class II IP67

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)

Diffuser : Clear Acrylic (Not for walk-over)

Cable : Potted 5 m 3x0,75 H03 VV-F

Standard with 5m 3x0,75 H03 VV-F cable


Available with springs for false ceiling.

Single color LED options upon request are ;

Blue Amber Green Red

BELKIS 0






Power	Code No Alum	Inox
6x20mA LIGHTING LEDS	416201	416211
6x20mA LIGHTING LEDS	417101	417111

BELKIS 0






Power	Code No Alum	Inox
9x20mA LIGHTING LEDS	416261	416271
9x20mA BACKLIGHTING LEDS	417191	417201

BELKIS 1






Power	Code No Alum	Inox
1x20mA BACKLIGHTING LEDS	407501	417351

BELKIS 2





Power	Code No
12x20mA LIGHTING LEDS	416281
4x20mA LIGHTING LEDS	416291
4x20mA BACKLIGHTING LEDS	416561
4x20mA BACKLIGHTING LEDS	416571

EMFA

BELKIS

SURFACE MOUNTED LED FIXTURES
Class II IP67

Available in any of these RAL colors

7004 7016 9005 9016 6002 1015



LIGHTING or BACKLIGHTING LEDS

Voltage : 240V A.C
(12V AC or DC, 24V AC or DC on request)


Diffuser : Clear Acrylic

Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;
Blue Amber Green Red

BELKIS 0






Power	Code No Alum	Inox
6x20mA LIGHTING LEDS	416221	416231
6x20mA BACKLIGHTING LEDS	417141	417151

BELKIS 0





Power	Code No Alum	Inox
9x20mA LIGHTING LEDS	417751	417761
9x20mA BACKLIGHTING LEDS	417271	417281

EMFA

DYO WALL RECESSED LED FIXTURES
Class II IP67




Outer Frame & Body
Anodized aluminium
Recessing Box
Galvanized Steel

Voltage : 240V A.C (12V AC or DC, 24V AC or DC on request)
Diffuser : Clear Polycarbonate
Cable : Standard with 5m 3x0,75 H03 VV-F cable

Single color LED options upon request are ;
Blue Amber Green Red

SYMMETRICAL INOX






Power	Lens	Code No
12x20mA BACKLIGHTING LEDS	120°	404501

ASYMMETRICAL INOX






Power	Lens	Code No
12x20mA LIGHTING LEDS	30°	404511
4x20mA LIGHTING LEDS	30°	404521

LIGHTSTONE

DRIVE OVER LED FIXTURES
Load 7.5 kN | Class III IP67 IK10

Body
Polycarbonate







Voltage : 12V A.C standard with 10m cable

9 x 20 mA LEDS	Code No
Warm White	426101

Single color LED options upon request are ;
Blue Amber Green Red

Connection Box
Glass reinforced polyester
IP 67 recessable 18 cable glands to serve 18 lightstones complete with one 220 V AC - 12V AC transformer. Maximum distance to box is 50 m.



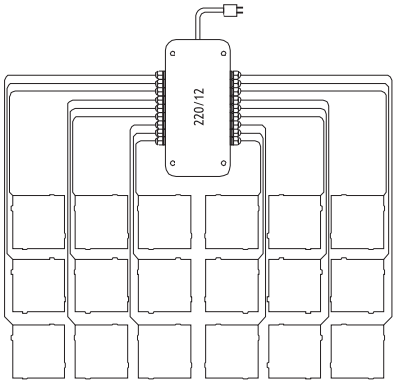


	Code No
Connection Box	426201


EMFA

TAROS

SURFACE MOUNTED LED FIXTURE
Class II IP67

Body
Acrylic
Cover
Stainless steel
Gear
Complete with Led Driver

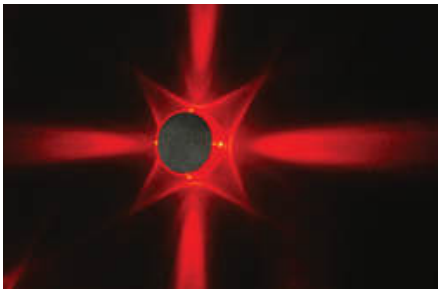





Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER **4 x 20 mA LIGHTING LEDS**	Code No
Warm White	428101

Single color LED options upon request are ;
Blue Amber Green Red

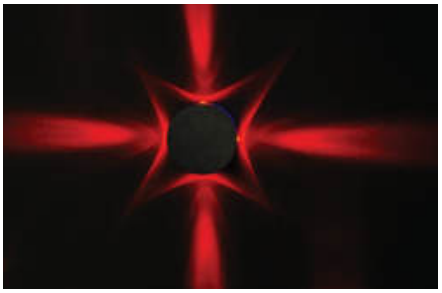



Voltage : 240V A.C Class II
(12V AC or DC, 24V AC or DC on request)

Standard with 5m 3x0,75 H03 VV-F cable

WITH LIT PERIMETER **4 x 20 mA LIGHTING LEDS**	Code No
Warm White	428111

Single color LED options upon request are ;
Blue Amber Green Red

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
108001	161	118222	305	119224	72	119614	79	120004	79	120714	87	121211	198
108002	161	118223	305	119231	72	119621	79	120011	79	120801	79	121212	198
108003	161	118301	306	119232	72	119622	79	120012	79	120802	79	121213	198
108004	161	118302	306	119233	72	119623	79	120013	79	120803	79	122001	71
109001	163	118303	306	119234	72	119624	79	120014	79	120804	79	122002	71
109002	163	118321	306	119301	75	119631	79	120041	79	120811	79	122003	71
109003	163	118322	306	119302	75	119632	79	120042	79	120812	79	122004	71
109004	163	118323	306	119304	75	119633	79	120043	79	120813	79	122011	71
109011	163	118331	306	119305	75	119634	79	120044	79	120814	79	122012	71
109012	163	118332	306	119311	75	119701	80	120051	79	120821	79	122013	71
109013	163	118333	306	119312	75	119702	80	120052	79	120822	79	122014	71
109014	163	118341	306	119313	75	119703	80	120053	79	120823	79	122101	71
109101	163	118342	306	119314	75	119704	80	120054	79	120824	79	122102	71
109102	163	118343	306	119321	75	119711	80	120201	82	120831	79	122103	71
109103	163	118401	305	119322	75	119712	80	120202	82	120832	79	122104	71
109104	163	118402	305	119323	75	119713	80	120203	82	120833	79	122111	71
109111	163	118403	305	119324	75	119714	80	120204	82	120834	79	122112	71
109112	163	119001	71	119331	75	119721	80	120211	82	120901	80	122113	71
109113	163	119002	71	119332	75	119722	80	120212	82	120902	80	122114	71
109114	163	119003	71	119333	75	119723	80	120213	82	120903	80	124101	254
112301	313	119004	71	119334	75	119724	80	120214	82	120904	80	124201	254
112302	313	119011	71	119401	72	119731	80	120301	83	120911	80	124301	254
112303	313	119012	71	119402	72	119732	80	120302	83	120912	80	125001	241
112311	313	119013	71	119403	72	119733	80	120303	83	120913	80	125002	241
112312	313	119014	71	119404	72	119734	80	120304	83	120914	80	125003	241
112313	313	119021	71	119411	72	119801	79	120311	83	120921	80	125011	241
112401	313	119022	71	119412	72	119802	79	120312	83	120922	80	125012	241
112402	313	119023	71	119413	72	119803	79	120313	83	120923	80	125013	241
112403	313	119024	71	119414	72	119804	79	120314	83	120924	80	125101	241
112411	313	119031	71	119421	72	119811	79	120401	85	120931	80	125102	241
112412	313	119032	71	119422	72	119812	79	120402	85	120932	80	125103	241
112413	313	119033	71	119423	72	119813	79	120403	85	120933	80	125201	241
113401	333	119034	71	119424	72	119814	79	120404	85	120934	80	125202	241
113421	333	119101	74	119431	72	119841	79	120411	85	121001	192	125203	241
113422	333	119102	74	119432	72	119842	79	120412	85	121002	192	126101	254
113423	333	119103	74	119433	72	119843	79	120413	85	121003	80	126201	254
113424	333	119104	74	119434	72	119844	79	120414	85	121004	80	126301	254
113431	333	119111	74	119501	75	119851	79	120501	87	121011	192	127001	259
113432	333	119112	74	119502	75	119852	79	120502	87	121012	192	127002	259
113433	333	119113	74	119503	75	119853	79	120503	87	121013	80	127003	259
113434	333	119114	74	119504	75	119854	79	120504	87	121014	80	127101	259
113441	333	119121	74	119511	75	119901	80	120511	87	121021	80	127102	259
113442	333	119122	74	119512	75	119902	80	120512	87	121022	80	127103	259
113443	333	119123	74	119513	75	119903	80	120513	87	121023	80	127201	259
113444	333	119124	74	119514	75	119904	80	120514	87	121024	80	127202	259
113451	333	119131	74	119521	75	119911	80	120601	85	121031	80	127203	259
113452	333	119132	74	119522	75	119912	80	120602	85	121032	80	127501	259
113453	333	119133	74	119523	75	119913	80	120603	85	121033	80	127502	259
113454	333	119134	74	119524	75	119914	80	120604	85	121034	80	127503	259
117001	347	119201	72	119531	75	119941	80	120611	85	121041	80	127511	259
117002	347	119202	72	119532	75	119942	80	120612	85	121042	80	127512	259
117011	347	119203	72	119533	75	119943	80	120613	85	121051	80	127513	259
117012	347	119204	72	119534	75	119944	80	120614	85	121052	80	127601	259
118201	305	119211	72	119601	79	119951	80	120701	87	121101	196	127602	259
118202	305	119212	72	119602	79	119952	80	120702	87	121102	196	127603	259
118203	305	119213	72	119603	79	119953	80	120703	87	121111	196	127611	259
118211	305	119214	72	119604	79	119954	80	120704	87	121112	196	127612	259
118212	305	119221	72	119611	79	120001	79	120711	87	121201	198	127613	259
118213	305	119222	72	119612	79	120002	79	120712	87	121202	198	127701	259
118221	305	119223	72	119613	79	120003	79	120713	87	121203	198	127702	259

EMFA

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
127703	259	135032	290	135372	293	140104	74	146421	250	160061	91	161051	92
127711	259	135033	290	135373	293	140111	74	147101	250	160062	91	161052	92
127712	259	135041	290	136001	294	140112	74	147201	250	160063	91	161053	92
127713	259	135042	290	136002	294	140113	74	147221	250	160064	91	161054	92
128101	261	135043	290	136003	294	140114	74	147231	250	160071	91	161061	94
128141	261	135051	290	136011	294	141001	75	147301	250	160072	91	161062	94
128142	261	135052	290	136012	294	141002	75	147321	250	160073	91	161063	94
129121	260	135053	290	136013	294	141003	75	147331	250	160074	91	161064	94
129122	260	135101	292	136021	294	141004	75	147341	250	160201	90	161071	94
129501	263	135102	292	136022	294	141011	75	147401	250	160202	90	161072	94
133111	330	135103	292	136023	294	141012	75	147421	250	160203	90	161073	94
133131	330	135111	292	136031	294	141013	75	149101	240	160204	90	161074	94
133211	330	135112	292	136032	294	141014	75	149102	240	160211	90	161081	92
133231	330	135113	292	136033	294	141101	75	149103	240	160212	90	161091	92
133301	330	135121	292	136041	294	141102	75	149111	240	160213	90	161101	94
133302	330	135122	292	136042	294	141103	75	149112	240	160214	90	161111	94
133303	330	135123	292	136043	294	141104	75	149113	240	160221	91	161201	93
133304	330	135131	292	136051	294	141111	75	149121	240	160222	91	161202	93
133311	330	135132	292	136052	294	141112	75	149122	240	160223	91	161203	93
133312	330	135133	292	136053	294	141113	75	149123	240	160224	91	161204	93
133313	330	135141	292	136061	294	141114	75	155001	208	160231	91	161211	93
133314	330	135142	292	136062	294	143101	250	155002	208	160232	91	161212	93
133321	330	135143	292	136063	294	143201	250	155003	208	160233	91	161213	93
133322	330	135151	292	136071	294	143221	250	155004	208	160234	91	161214	93
133323	330	135152	292	136072	294	143231	250	155101	208	160241	90	161221	95
133324	330	135153	292	136073	294	143301	250	155102	208	160242	90	161222	95
133331	330	135201	291	137101	206	143321	250	155103	208	160243	90	161223	95
133332	330	135202	291	137111	206	143331	250	155104	208	160244	90	161224	95
133333	330	135203	291	137121	206	143341	250	155201	208	160251	90	161231	95
133334	330	135211	291	137131	206	143401	250	155202	208	160252	90	161232	95
133401	330	135212	291	138201	205	143421	250	155203	208	160253	90	161233	95
133402	330	135213	291	138211	205	144101	250	155204	208	160254	90	161234	95
133403	330	135221	291	138221	205	144201	250	155301	208	160261	91	161241	93
133404	330	135222	291	139001	72	144221	250	155302	208	160262	91	161242	93
133411	330	135223	291	139002	72	144231	250	155303	208	160263	91	161243	93
133412	330	135231	291	139003	72	144301	250	155304	208	160264	91	161244	93
133413	330	135232	291	139004	72	144321	250	160001	90	160271	91	161251	93
133414	330	135233	291	139011	72	144331	250	160002	90	160272	91	161252	93
133421	330	135301	293	139012	72	144341	250	160003	90	160273	91	161253	93
133422	330	135302	293	139013	72	144401	250	160004	90	160274	91	161254	93
133423	330	135303	293	139014	72	144421	250	160011	90	161001	92	161261	95
133424	330	135311	293	139101	72	145101	250	160012	90	161002	92	161262	95
133431	330	135312	293	139102	72	145201	250	160013	90	161003	92	161263	95
133432	330	135313	293	139103	72	145221	250	160014	90	161004	92	161264	95
133433	330	135321	293	139104	72	145231	250	160021	91	161011	92	161271	95
133434	330	135322	293	139111	72	145301	250	160022	91	161012	92	161272	95
134101	274	135323	293	139112	72	145321	250	160023	91	161013	92	161273	95
134201	274	135331	293	139113	72	145331	250	160024	91	161014	92	161274	95
134211	274	135332	293	139114	72	145341	250	160031	91	161021	94	161281	93
134221	274	135333	293	140001	74	145401	250	160032	91	161022	94	161291	93
135001	290	135341	293	140002	74	145421	250	160033	91	161023	94	161301	95
135002	290	135342	293	140003	74	146101	250	160034	91	161024	94	161311	95
135003	290	135343	293	140004	74	146201	250	160041	90	161031	94	161321	93
135011	290	135351	293	140011	74	146221	250	160042	90	161032	94	161322	93
135012	290	135352	293	140012	74	146231	250	160043	90	161033	94	161323	93
135013	290	135353	293	140013	74	146301	250	160044	90	161034	94	161324	93
135021	290	135361	293	140014	74	146321	250	160051	90	161041	92	161331	93
135022	290	135362	293	140101	74	146331	250	160052	90	161042	92	161332	93
135023	290	135363	293	140102	74	146341	250	160053	90	161043	92	161333	93
135031	290	135371	293	140103	74	146401	250	160054	90	161044	92	161334	93

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
161341	95	161521	93	162013	97	162413	97	163173	101	164733	104	170101	106
161342	95	161531	93	162014	97	162414	97	163174	101	164734	104	170102	106
161343	95	161541	95	162021	98	162421	98	163201	100	164741	103	170103	106
161344	95	161551	95	162022	98	162422	98	163202	100	164742	103	170104	106
161351	95	161601	92	162023	98	162423	98	163203	100	164743	103	170111	106
161352	95	161602	92	162024	98	162424	98	163204	100	164744	103	170112	106
161353	95	161603	92	162031	98	162431	98	163211	100	164751	103	170113	106
161354	95	161604	92	162032	98	162432	98	163212	100	164752	103	170114	106
161361	93	161611	92	162033	98	162433	98	163213	100	164753	103	170141	106
161362	93	161612	92	162034	98	162434	98	163214	100	164754	103	170142	106
161363	93	161613	92	162041	97	162501	97	163301	101	164761	104	170143	106
161364	93	161614	92	162051	97	162511	97	163302	101	164762	104	170144	106
161371	93	161621	94	162061	98	162601	98	163303	101	164763	104	170151	106
161372	93	161622	94	162071	98	162611	98	163304	101	164764	104	170152	106
161373	93	161623	94	162201	97	163001	100	163311	101	164771	104	170153	106
161374	93	161624	94	162202	97	163002	100	163312	101	164772	104	170154	106
161381	95	161631	94	162203	97	163003	100	163313	101	164773	104	170201	107
161382	95	161632	94	162204	97	163004	100	163314	101	164774	104	170202	107
161383	95	161633	94	162211	97	163011	100	164041	103	164801	103	170203	107
161384	95	161634	94	162212	97	163012	100	164042	103	164802	103	170204	107
161391	95	161641	92	162213	97	163013	100	164043	103	164803	103	170211	107
161392	95	161642	92	162214	97	163014	100	164044	103	164804	103	170212	107
161393	95	161643	92	162221	98	163021	101	164051	103	164811	103	170213	107
161394	95	161644	92	162222	98	163022	101	164052	103	164812	103	170214	107
161401	93	161651	92	162223	98	163023	101	164053	103	164813	103	170221	107
161411	93	161652	92	162224	98	163024	101	164054	103	164814	103	170222	107
161421	95	161653	92	162231	98	163031	101	164061	104	164821	104	170223	107
161431	95	161654	92	162232	98	163032	101	164062	104	164822	104	170224	107
161441	93	161661	94	162233	98	163033	101	164063	104	164823	104	170301	107
161442	93	161662	94	162234	98	163034	101	164064	104	164824	104	170302	107
161443	93	161663	94	162241	97	163101	100	164071	104	164831	104	170303	107
161444	93	161664	94	162251	97	163102	100	164072	104	164832	104	170304	107
161451	93	161671	94	162261	98	163103	100	164073	104	164833	104	170401	108
161452	93	161672	94	162271	98	163104	100	164074	104	164834	104	170402	108
161453	93	161673	94	162281	97	163111	100	164081	103	165001	92	170403	108
161454	93	161674	94	162282	97	163112	100	164091	103	165002	92	170404	108
161461	95	161701	94	162283	97	163113	100	164101	104	165003	92	170411	108
161462	95	161702	94	162284	97	163114	100	164111	104	165004	92	170412	108
161463	95	161703	94	162291	97	163121	101	164241	103	165011	92	170413	108
161464	95	161704	94	162292	97	163122	101	164251	103	165012	92	170414	108
161471	95	161711	94	162293	97	163123	101	164261	104	165013	92	170421	108
161472	95	161712	94	162294	97	163124	101	164271	104	165014	92	170422	108
161473	95	161713	94	162301	98	163131	101	164321	103	165015	92	170423	108
161474	95	161714	94	162302	98	163132	101	164331	103	165101	92	170424	108
161481	93	161715	94	162303	98	163133	101	164341	104	165102	92	171001	214
161482	93	161801	94	162304	98	163134	101	164351	104	165103	92	171002	214
161483	93	161802	94	162311	98	163141	100	164701	103	165104	92	171003	214
161484	93	161803	94	162312	98	163142	100	164702	103	165111	92	171004	214
161491	93	161804	94	162313	98	163143	100	164703	103	165112	92	171011	214
161492	93	161811	94	162314	98	163144	100	164704	103	165113	92	171012	214
161493	93	161812	94	162321	97	163151	100	164711	103	165114	92	171013	214
161494	93	161813	94	162331	97	163152	100	164712	103	165115	92	171014	214
161501	95	161814	94	162341	98	163153	100	164713	103	170001	106	171101	214
161502	95	161815	94	162351	98	163154	100	164714	103	170002	106	171102	214
161503	95	162001	97	162401	97	163161	101	164721	104	170003	106	171103	214
161504	95	162002	97	162402	97	163162	101	164722	104	170004	106	171104	214
161511	95	162003	97	162403	97	163163	101	164723	104	170011	106	171111	214
161512	95	162004	97	162404	97	163164	101	164724	104	170012	106	171112	214
161513	95	162011	97	162411	97	163171	101	164731	104	170013	106	171113	214
161514	95	162012	97	162412	97	163172	101	164732	104	170014	106	171114	214

EMFA

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
171201	214	174011	214	177212	216	181012	357	183202	357	185072	361	185242	359
171202	214	174012	214	177213	216	181013	357	183203	357	185073	361	185243	359
171203	214	174013	214	178101	247	181014	357	183204	357	185074	361	185244	359
171204	214	174014	214	178102	247	181101	357	183211	357	185081	361	185251	360
171211	214	174101	214	178103	247	181102	357	183212	357	185082	361	185252	360
171212	214	174102	214	178111	247	181103	357	183213	357	185083	361	185253	360
171213	214	174103	214	178112	247	181104	357	183214	357	185084	361	185254	360
171214	214	174104	214	178113	247	181111	357	184001	357	185101	359	185261	360
172001	214	174111	214	178121	247	181112	357	184002	357	185102	359	185262	360
172002	214	174112	214	178122	247	181113	357	184003	357	185103	359	185263	360
172003	214	174113	214	178123	247	181114	357	184004	357	185104	359	185264	360
172004	214	174114	214	178131	247	181201	357	184011	357	185111	360	185271	361
172011	214	174201	214	178132	247	181202	357	184012	357	185112	360	185272	361
172012	214	174202	214	178133	247	181203	357	184013	357	185113	360	185273	361
172013	214	174203	214	178141	247	181204	357	184014	357	185114	360	185274	361
172014	214	174204	214	178142	247	181211	357	184101	357	185121	361	185281	361
172101	214	174211	214	178143	247	181212	357	184102	357	185122	361	185282	361
172102	214	174212	214	179001	164	181213	357	184103	357	185123	361	185283	361
172103	214	174213	214	179002	164	181214	357	184104	357	185124	361	185284	361
172104	214	174214	214	179003	164	182001	357	184111	357	185131	359	186001	359
172111	214	175001	215	179004	164	182002	357	184112	357	185132	359	186002	359
172112	214	175002	215	179011	164	182003	357	184113	357	185133	359	186003	359
172113	214	175003	215	179012	164	182004	357	184114	357	185134	359	186004	359
172114	214	175004	215	179013	164	182011	357	184201	357	185141	359	186011	360
172201	214	175101	215	179014	164	182012	357	184202	357	185142	359	186012	360
172202	214	175102	215	180101	32	182013	357	184203	357	185143	359	186013	360
172203	214	175103	215	180102	32	182014	357	184204	357	185144	359	186014	360
172204	214	175104	215	180103	32	182101	357	184211	357	185151	360	186021	361
172211	214	175201	215	180111	32	182102	357	184212	357	185152	360	186022	361
172212	214	175202	215	180112	32	182103	357	184213	357	185153	360	186023	361
172213	214	175203	215	180113	32	182104	357	184214	357	185154	360	186024	361
172214	214	175204	215	180121	32	182111	357	185001	359	185161	360	186031	359
173001	214	176001	215	180122	32	182112	357	185002	359	185162	360	186032	359
173002	214	176002	215	180123	32	182113	357	185003	359	185163	360	186033	359
173003	214	176003	215	180131	32	182114	357	185004	359	185164	360	186034	359
173004	214	176004	215	180132	32	182201	357	185011	360	185171	361	186041	359
173011	214	176101	215	180133	32	182202	357	185012	360	185172	361	186042	359
173012	214	176102	215	180141	32	182203	357	185013	360	185173	361	186043	359
173013	214	176103	215	180142	32	182204	357	185014	360	185174	361	186044	359
173014	214	176104	215	180143	32	182211	357	185021	361	185181	361	186051	360
173101	214	176201	215	180201	135	182212	357	185022	361	185182	361	186052	360
173102	214	176202	215	180202	135	182213	357	185023	361	185183	361	186053	360
173103	214	176203	215	180203	135	182214	357	185024	361	185184	361	186054	360
173104	214	176204	215	180211	135	183001	357	185031	359	185201	359	186061	360
173111	214	177001	216	180212	135	183002	357	185032	359	185202	359	186062	360
173112	214	177002	216	180213	135	183003	357	185033	359	185203	359	186063	360
173113	214	177003	216	180221	135	183004	357	185034	359	185204	359	186064	360
173114	214	177011	216	180222	135	183011	357	185041	359	185211	360	186071	361
173201	214	177012	216	180223	135	183012	357	185042	359	185212	360	186072	361
173202	214	177013	216	180231	135	183013	357	185043	359	185213	360	186073	361
173203	214	177101	216	180232	135	183014	357	185044	359	185214	360	186074	361
173204	214	177102	216	180233	135	183101	357	185051	360	185221	361	186081	361
173211	214	177103	216	180241	135	183102	357	185052	360	185222	361	186082	361
173212	214	177111	216	180242	135	183103	357	185053	360	185223	361	186083	361
173213	214	177112	216	180243	135	183104	357	185054	360	185224	361	186084	361
173214	214	177113	216	181001	357	183111	357	185061	360	185231	359	186101	359
174001	214	177201	216	181002	357	183112	357	185062	360	185232	359	186102	359
174002	214	177202	216	181003	357	183113	357	185063	360	185233	359	186103	359
174003	214	177203	216	181004	357	183114	357	185064	360	185234	359	186104	359
174004	214	177211	216	181011	357	183201	357	185071	361	185241	359	186111	360

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
186112	360	186272	361	191011	224	194111	232	198211	231	223011	230	233101	304
186113	360	186273	361	191012	224	194112	232	198212	231	223012	230	233102	304
186114	360	186274	361	191013	224	194113	232	198213	231	223013	230	233103	304
186121	361	186281	361	191101	224	194201	232	201131	36	223111	230	233111	304
186122	361	186282	361	191102	224	194202	232	201141	36	223112	230	233112	304
186123	361	186283	361	191103	224	194203	232	201151	36	223113	230	233113	304
186124	361	186284	361	191111	224	194211	232	201161	36	223211	230	234001	301
186131	359	187001	362	191112	224	194212	232	202101	38	223212	230	234002	301
186132	359	187002	362	191113	224	194213	232	202141	38	223213	230	234003	301
186133	359	187003	362	191201	224	194301	235	202142	38	224011	230	234011	301
186134	359	187101	362	191202	224	194302	235	202143	38	224012	230	234012	301
186141	359	187102	362	191203	224	194303	235	202144	38	224013	230	234013	301
186142	359	187103	362	191211	224	194401	235	203101	38	224111	230	234101	301
186143	359	187201	362	191212	224	194402	235	203141	38	224112	230	234102	301
186144	359	187202	362	191213	224	194403	235	203142	38	224113	230	234103	301
186151	360	187203	362	192001	224	195301	235	203143	38	224211	230	234111	301
186152	360	188001	210	192002	224	195302	235	203144	38	224212	230	234112	301
186153	360	188002	210	192003	224	195303	235	204101	38	224213	230	234113	301
186154	360	188003	210	192011	224	195401	235	204141	38	230001	301	235001	302
186161	360	188004	210	192012	224	195402	235	204142	38	230002	301	235002	302
186162	360	188101	210	192013	224	195403	235	204143	38	230003	301	235003	302
186163	360	188102	210	192101	224	196001	227	204144	38	230011	301	235011	302
186164	360	188103	210	192102	224	196002	227	205101	38	230012	301	235012	302
186171	361	188104	210	192103	224	196003	227	205141	38	230013	301	235013	302
186172	361	189001	218	192111	224	196011	227	205142	38	230101	301	235101	302
186173	361	189002	218	192112	224	196012	227	205143	38	230102	301	235102	302
186174	361	189003	218	192113	224	196013	227	205144	38	230103	301	235103	302
186181	361	189011	218	192201	224	196101	227	206231	40	230111	301	235111	302
186182	361	189012	218	192202	224	196102	227	206241	40	230112	301	235112	302
186183	361	189013	218	192203	224	196103	227	206251	40	230113	301	235113	302
186184	361	189101	218	192211	224	196111	227	206261	40	231001	302	236001	303
186201	359	189102	218	192212	224	196112	227	206271	40	231002	302	236002	303
186202	359	189103	218	192213	224	196113	227	207231	40	231003	302	236003	303
186203	359	189111	218	193001	224	196201	227	207241	40	231011	302	236011	303
186204	359	189112	218	193002	224	196202	227	207251	40	231012	302	236012	303
186211	360	189113	218	193003	224	196203	227	207261	40	231013	302	236013	303
186212	360	189201	218	193011	224	196211	227	207271	40	231101	302	236101	303
186213	360	189202	218	193012	224	196212	227	211201	48	231102	302	236102	303
186214	360	189203	218	193013	224	196213	227	211211	48	231103	302	236103	303
186221	361	189211	218	193101	224	196301	235	211221	48	231111	302	236111	303
186222	361	189212	218	193102	224	196302	235	211241	48	231112	302	236112	303
186223	361	189213	218	193103	224	196303	235	211271	48	231113	302	236113	303
186224	361	190001	242	193111	224	196401	235	211361	48	232001	303	237001	304
186231	359	190002	242	193112	224	196402	235	212201	40	232002	303	237002	304
186232	359	190003	242	193113	224	196403	235	212211	40	232003	303	237003	304
186233	359	190011	242	193201	224	198001	231	212221	40	232011	303	237011	304
186234	359	190012	242	193202	224	198002	231	212241	40	232012	303	237012	304
186241	359	190013	242	193203	224	198003	231	212271	40	232013	303	237013	304
186242	359	190101	244	193211	224	198011	231	221311	40	232101	303	237101	304
186243	359	190102	244	193212	224	198012	231	221321	40	232102	303	237102	304
186244	359	190103	244	193213	224	198013	231	221391	40	232103	303	237103	304
186251	360	190201	245	194001	232	198101	231	222011	230	232111	303	237111	304
186252	360	190202	245	194002	232	198102	231	222012	230	232112	303	237112	304
186253	360	190203	245	194003	232	198103	231	222013	230	232113	303	237113	304
186254	360	190301	245	194011	232	198111	231	222111	230	233001	304	240001	59
186261	360	190302	245	194012	232	198112	231	222112	230	233002	304	240002	59
186262	360	190303	245	194013	232	198113	231	222113	230	233003	304	240003	59
186263	360	191001	224	194101	232	198201	231	222211	230	233011	304	240004	59
186264	360	191002	224	194102	232	198202	231	222212	230	233012	304	240011	59
186271	361	191003	224	194103	232	198203	231	222213	230	233013	304	240012	59

EMFA

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
240013	59	258003	25	263011	316	268532	326	275103	222	289032	335	297002	315
240014	59	258011	25	263012	316	269301	327	276001	222	289033	335	297003	315
240101	59	258012	25	263013	316	269302	327	276002	222	289034	335	297004	315
240102	59	258013	25	263201	316	269311	327	276003	222	289041	335	297011	315
240103	59	258021	25	263202	316	269312	327	276101	222	289042	335	297012	315
240104	59	258022	25	263203	316	269321	327	276102	222	289043	335	297013	315
240111	59	258023	25	263211	316	269322	327	276103	222	289051	335	297014	315
240112	59	258031	25	263212	316	269401	327	277001	222	289052	335	297101	188
240113	59	258032	25	263213	316	269402	327	277002	222	289053	335	297102	188
240114	59	258033	25	266001	323	269411	327	277003	222	290101	147	297103	188
241001	59	259001	132	266002	323	269412	327	277101	222	290102	147	297104	188
241002	59	259002	132	266003	323	269421	327	277102	222	290103	147	297111	188
241003	59	259003	132	266021	323	269422	327	277103	222	290104	147	297112	188
241004	59	259004	132	266022	323	269501	327	280001	221	290201	147	297113	188
241011	59	259005	132	266023	323	269502	327	280002	221	291101	252	297114	188
241012	59	260101	316	266101	323	269511	327	280003	221	291121	252	297121	188
241013	59	260102	316	266102	323	269512	327	280011	221	291201	252	297122	188
241014	59	260103	316	266103	323	269521	327	280012	221	292201	257	297123	188
241101	59	260111	316	266121	323	269522	327	280013	221	292221	252	297124	188
241102	59	260112	316	266122	323	270001	219	280101	221	292301	257	297131	188
241103	59	260113	316	266123	323	270002	219	280102	221	293111	342	297132	188
241104	59	260201	321	266201	337	270003	219	280103	221	293201	174	297133	188
241111	59	260202	321	266202	337	270011	219	280111	221	293251	174	297134	188
241112	59	260203	321	266203	337	270012	219	280112	221	293301	174	297141	188
241113	59	260211	321	266204	337	270013	219	280113	221	293401	174	297142	188
241114	59	260212	321	266301	337	270101	219	281001	221	294101	255	297143	188
251101	25	260213	321	266302	337	270102	219	281002	221	294201	255	297144	188
251111	25	260231	321	266303	337	270103	219	281003	221	295101	367	297151	188
251201	25	260232	321	266304	337	270111	219	281011	221	295115	147	297152	188
251211	25	260233	321	267001	323	270112	219	281012	221	295201	369	297153	188
254301	25	260241	321	267002	323	270113	219	281013	221	295202	369	297154	188
254311	25	260242	321	267003	323	271001	219	281101	221	295203	369	298001	148
254401	25	260243	321	267021	323	271002	219	281102	221	295211	369	298002	148
254411	25	260301	336	267022	323	271003	219	281103	221	295212	369	298003	148
256301	131	260302	336	267023	323	271011	219	281111	221	295213	369	298004	148
256302	131	260303	336	267101	323	271012	219	281112	221	295221	369	298011	148
256303	131	260331	336	267102	323	271013	219	281113	221	295222	369	298012	148
256304	131	260332	336	267103	323	271101	219	282001	221	295223	369	298013	148
256311	131	260333	336	267121	323	271102	219	282002	221	295231	369	298014	148
256321	131	260401	336	267122	323	271103	219	282003	221	295232	369	298021	148
256331	131	260402	336	267123	323	271111	219	282011	221	295233	369	298022	148
256332	131	260403	336	268301	326	271112	219	282012	221	295241	369	298023	148
256333	131	260431	336	268302	326	271113	219	282013	221	295242	369	298024	148
256334	131	260432	336	268311	326	272001	219	282101	221	295243	369	301121	119
257001	25	260433	336	268312	326	272002	219	282102	221	295251	369	301131	119
257011	25	261001	318	268321	326	272003	219	282103	221	295252	369	302121	119
257101	25	261002	318	268322	326	272011	219	282111	221	295253	369	302131	119
257111	25	261003	318	268401	326	272012	219	282112	221	295301	368	303121	119
257211	131	261011	318	268402	326	272013	219	282113	221	295302	368	303131	119
257231	131	261012	318	268411	326	272101	219	289001	335	295303	368	304121	119
257241	131	261013	318	268412	326	272102	219	289002	335	295311	368	304131	119
257242	131	262001	318	268421	326	272103	219	289003	335	295312	368	305121	119
257243	131	262002	318	268422	326	272111	219	289011	335	295313	368	305131	119
257244	131	262003	318	268501	326	272112	219	289012	335	295321	368	306121	119
257251	131	262021	318	268502	326	272113	219	289013	335	295322	368	306131	119
257252	131	262022	318	268511	326	275001	222	289021	335	295323	368	307121	119
257253	131	262023	318	268512	326	275002	222	289022	335	296111	343	307131	119
257254	131	263001	316	268521	326	275003	222	289023	335	296121	343	308121	119
258001	25	263002	316	268522	326	275101	222	289024	335	296131	343	308131	119
258002	25	263003	316	268531	326	275102	222	289031	335	297001	315	309001	120

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
309002	120	324221	86	326214	82	331234	192	346501	172	392112	297	405376	272
309003	120	325111	328	326221	83	331243	192	346511	172	392113	297	405377	272
309004	120	325211	328	326222	83	331244	192	349001	125	392121	297	405391	272
309011	120	326001	67	326223	83	331253	192	349002	125	392122	297	405392	272
309012	120	326002	67	326224	83	331254	192	349003	125	392123	297	405396	272
309013	120	326003	67	326231	83	331261	192	349004	125	392201	297	405397	272
309014	120	326004	67	326232	83	331262	192	349011	125	392202	297	405411	272
309101	120	326011	67	326233	83	331263	192	349012	125	392203	297	405421	273
309102	120	326012	67	326234	83	331264	192	349013	125	392211	297	405422	273
309103	120	326013	67	326301	82	331301	196	349014	125	392212	297	405426	273
309104	120	326014	67	326302	82	331302	196	349101	125	392213	297	405427	273
309111	120	326021	69	326303	82	331306	196	349102	125	392221	297	405431	273
309112	120	326022	69	326304	82	331307	196	349103	125	392222	297	405451	273
309113	120	326023	69	326311	82	331311	196	349104	125	392223	297	405452	273
309114	120	326024	69	326312	82	331312	196	349111	125	393001	298	405456	273
309201	62	326031	69	326313	82	331316	196	349112	125	393002	298	405457	273
309201	120	326032	69	326314	82	331317	196	349113	125	393003	298	405461	273
309202	62	326033	69	326321	83	331321	196	349114	125	393011	298	405471	270
309202	120	326034	69	326322	83	331331	196	360111	344	393012	298	405472	270
309203	62	326041	67	326323	83	331332	196	360121	344	393013	298	405476	270
309203	120	326042	67	326324	83	331333	196	360211	344	393021	298	405477	270
309204	62	326043	67	326331	83	331334	196	360221	344	393022	298	405481	270
309204	120	326044	67	326332	83	331343	196	363111	344	393023	298	405482	270
309211	62	326051	67	326333	83	331353	196	391001	61	393101	298	405486	270
309211	120	326052	67	326334	83	331401	198	391002	61	393102	298	405487	270
309212	62	326053	67	326401	78	331402	198	391003	61	393103	298	405501	64
309212	120	326054	67	326411	78	331406	198	391004	61	393111	298	405502	64
309213	62	326061	69	330101	190	331407	198	391101	61	393112	298	405503	64
309213	120	326062	69	330121	190	331411	198	391102	61	393113	298	405504	64
309214	62	326063	69	330201	190	331412	198	391103	61	393121	298	405511	64
309214	120	326064	69	330202	190	331416	198	391104	61	393122	298	405512	64
309221	62	326071	69	330206	190	331417	198	391201	61	393123	298	405513	64
309222	62	326072	69	330207	190	331421	198	391202	61	404501	381	405514	64
309223	62	326073	69	330211	190	331422	198	391203	61	404511	381	405521	65
309224	62	326074	69	330212	190	331423	198	391204	61	404521	381	405522	65
310111	146	326101	76	330216	190	331424	198	391211	61	405201	272	405523	65
311111	146	326102	76	330217	190	331501	194	391212	61	405241	273	405524	65
312111	146	326103	76	330221	190	331601	194	391213	61	405242	273	405531	65
314111	146	326104	76	330222	190	332121	201	391214	61	405243	273	405532	65
316121	50	326111	76	330223	190	332131	201	391301	61	405244	273	405533	65
316131	50	326112	76	330224	190	332201	203	391302	61	405251	273	405534	65
317121	50	326113	76	330251	190	332211	203	391303	61	405252	273	405541	64
317131	50	326114	76	330252	190	332221	203	391304	61	405253	273	405542	64
319101	50	326121	78	330253	190	332231	203	391311	61	405254	273	405543	64
319201	50	326122	78	330254	190	333001	133	391312	61	405321	268	405544	64
320101	64	326123	78	330261	190	333002	133	391313	61	405322	268	405551	64
320111	65	326124	78	331121	194	333003	133	391314	61	405326	268	405552	64
320201	64	326131	78	331141	194	333004	133	392001	297	405327	268	405553	64
320211	65	326132	78	331201	192	335101	341	392002	297	405331	268	405554	64
321101	328	326133	78	331202	192	336111	341	392003	297	405332	268	405561	65
321201	328	326134	78	331206	192	337121	341	392011	297	405336	268	405562	65
322101	71	326141	76	331207	192	337131	341	392012	297	405337	268	405563	65
322121	74	326151	76	331211	192	340101	172	392013	297	405341	268	405564	65
322201	71	326201	82	331212	192	341111	172	392021	297	405351	268	405571	65
322221	74	326202	82	331216	192	342111	172	392022	297	405361	272	405572	65
323121	328	326203	82	331217	192	343101	172	392023	297	405362	272	405573	65
323221	328	326204	82	331221	192	344111	172	392101	297	405366	272	405574	65
324111	84	326211	82	331231	192	345111	172	392102	297	405367	272	405581	64
324121	86	326212	82	331232	192	346401	172	392103	297	405371	272	405582	64
324211	84	326213	82	331233	192	346411	172	392111	297	405372	272	405583	64

EMFA

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
405584	64	412226	282	417761	380	418513	68	418703	70	421212	268	421382	284
405591	64	412227	282	418101	378	418514	68	418704	70	421213	268	421383	284
405592	64	412231	282	418111	378	418521	68	418711	68	421214	268	421384	284
405593	64	412232	282	418121	378	418522	68	418721	68	421221	281	421391	284
405594	64	412236	282	418331	67	418523	68	418731	70	421222	281	421392	284
405601	65	412237	282	418332	67	418524	68	418741	70	421223	281	421393	284
405602	65	412241	282	418333	67	418531	70	418871	70	421224	281	421394	284
405603	65	412251	282	418334	67	418532	70	418872	70	421231	281	421401	284
405604	65	412252	282	418341	67	418533	70	418873	70	421232	281	421402	284
405611	65	412256	282	418342	67	418534	70	418874	70	421233	281	421403	284
405612	65	412257	282	418343	67	418541	70	419111	332	421234	281	421404	284
405613	65	412271	282	418344	67	418542	70	419201	312	421241	282	421501	284
405614	65	412281	283	418351	69	418543	70	419202	312	421242	282	421502	284
407501	379	412282	283	418352	69	418544	70	419203	312	421243	282	421503	284
408001	269	412286	283	418353	69	418551	68	419211	312	421244	282	421504	284
408002	269	412287	283	418354	69	418552	68	419212	312	421251	283	421511	284
408003	269	412291	284	418361	69	418553	68	419213	312	421252	283	421512	284
408004	269	412292	284	418362	69	418554	68	419301	312	421253	283	421513	284
409001	287	412296	284	418363	69	418561	68	419302	312	421254	283	421514	284
409011	287	412297	284	418364	69	418562	68	419303	312	421261	283	421601	285
409101	287	412301	284	418371	67	418563	68	419313	312	421264	283	421602	285
409111	287	412311	285	418381	67	418564	68	419314	312	421266	283	421603	285
409201	287	412312	285	418391	68	418581	70	419315	312	421267	283	421604	285
409211	287	412316	285	418392	68	418582	70	420111	332	421271	283	421611	285
410001	287	412317	285	418393	68	418583	70	420211	332	421272	283	421612	285
410011	287	412321	285	418394	68	418584	70	420301	314	421273	283	421613	285
410101	287	412322	285	418401	68	418591	68	420302	314	421274	283	421614	285
410111	287	412326	285	418402	68	418601	68	420303	314	421301	268	421701	270
410201	287	412327	285	418403	68	418611	70	420313	314	421302	268	421702	270
410211	287	412331	285	418404	68	418621	70	420314	314	421303	268	421703	270
412101	281	412341	286	418411	70	418631	68	420315	314	421304	268	421704	270
412102	281	412342	286	418412	70	418632	68	420401	314	421311	268	421711	270
412106	281	412346	286	418413	70	418633	68	420402	314	421312	268	421712	270
412107	281	412347	286	418414	70	418634	68	420403	314	421313	268	421713	270
412111	281	412351	286	418421	70	418641	68	420413	314	421314	268	421714	270
412112	281	412352	286	418422	70	418642	68	420414	314	421321	272	421821	268
412116	281	412356	286	418423	70	418643	68	420415	314	421322	272	421822	268
412117	281	412357	286	418424	70	418644	68	421101	268	421323	272	421823	268
412121	281	412361	286	418431	68	418651	70	421102	268	421324	272	421824	268
412122	281	412411	284	418432	68	418652	70	421106	268	421331	272	421831	268
412126	281	416201	379	418433	68	418653	70	421107	268	421332	272	421832	268
412127	281	416211	379	418434	68	418654	70	421111	268	421333	272	421833	268
412131	281	416221	380	418441	68	418661	70	421112	268	421334	272	421834	268
412132	281	416231	380	418442	68	418662	70	421116	268	421341	273	421851	272
412136	281	416261	379	418443	68	418663	70	421117	268	421342	273	421852	272
412137	281	416271	379	418444	68	418664	70	421121	268	421343	273	421853	272
412141	281	416281	379	418451	70	418671	68	421122	268	421344	273	421854	272
412151	281	416291	379	418452	70	418672	68	421126	268	421351	281	421871	273
412181	281	416561	379	418453	70	418673	68	421127	268	421352	281	421872	273
412182	281	416571	379	418454	70	418674	68	421131	268	421353	281	421873	273
412186	281	417101	379	418461	70	418681	68	421132	268	421354	281	421874	273
412187	281	417111	379	418462	70	418682	68	421136	268	421361	281	421911	281
412191	281	417141	380	418463	70	418683	68	421137	268	421362	281	421912	281
412192	281	417151	380	418464	70	418684	68	421141	268	421363	281	421913	281
412196	281	417191	379	418471	68	418691	70	421151	268	421364	281	421914	281
412197	281	417201	379	418481	68	418692	70	421201	268	421371	282	421921	281
412201	281	417271	380	418491	70	418693	70	421202	268	421372	282	421922	281
412211	281	417281	380	418501	70	418694	70	421203	268	421373	282	421923	281
412221	282	417351	379	418511	68	418701	70	421204	268	421374	282	421924	281
412222	282	417751	380	418512	68	418702	70	421211	268	421381	284	421931	282

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
421932	282	422332	83	423251	78	423642	85	424142	149	425262	69	429051	276
421933	282	422336	83	423261	118	423643	85	424143	149	425266	69	429061	276
421934	282	422337	83	423262	118	423644	85	424144	149	425267	69	429062	276
421951	285	422381	86	423263	118	423651	85	424151	149	425281	65	429063	276
421952	285	422421	84	423264	118	423652	85	424152	149	425282	65	429064	276
421953	285	422422	84	423271	118	423653	85	424153	149	425286	65	429071	276
421954	285	422426	84	423272	118	423654	85	424154	149	425287	65	429081	277
421961	285	422427	84	423273	118	423661	87	424161	149	425291	64	429082	277
421962	285	422431	84	423274	118	423662	87	424162	149	425292	64	429083	277
421963	285	422432	84	423281	118	423663	87	424163	149	425296	64	429084	277
421964	285	422436	84	423282	118	423664	87	424164	149	425297	64	429091	277
421971	286	422437	84	423283	118	423671	87	424201	153	425311	270	430111	35
421972	286	422441	86	423284	118	423672	87	424202	153	425411	69	430116	35
421973	286	422442	86	423291	118	423673	87	424203	153	425421	69	430117	35
421974	286	422446	86	423292	118	423674	87	424204	153	425611	200	430118	35
421981	286	422447	86	423293	118	423701	84	425101	172	425612	200	430161	35
421982	286	422451	86	423294	118	423702	84	425102	172	425616	200	430201	138
421983	286	422452	86	423301	84	423703	84	425106	172	425617	200	430202	138
421984	286	422456	86	423302	84	423704	84	425107	172	425631	200	430206	138
422101	67	422457	86	423303	84	423711	84	425111	172	425632	200	430207	138
422102	67	422491	86	423304	84	423712	84	425112	172	425636	200	430241	138
422106	67	423101	76	423311	84	423713	84	425116	172	425637	200	430311	138
422107	67	423102	76	423312	84	423714	84	425117	172	425641	200	430312	138
422111	67	423103	76	423313	84	423721	86	425121	172	425651	200	430316	138
422112	67	423104	76	423314	84	423722	86	425122	172	425652	200	430317	138
422116	67	423111	76	423321	86	423723	86	425126	172	425653	200	430341	138
422117	67	423112	76	423322	86	423724	86	425127	172	426101	382	430351	35
422201	76	423113	76	423323	86	423731	86	425131	172	426201	382	430352	35
422202	76	423114	76	423324	86	423732	86	425132	172	427001	341	430353	35
422203	76	423121	78	423331	86	423733	86	425136	172	427002	341	430354	35
422204	76	423122	78	423332	86	423734	86	425137	172	427003	341	430361	35
422211	76	423123	78	423333	86	423901	118	425141	172	427004	341	430371	116
422212	76	423124	78	423334	86	423902	118	425142	172	427101	341	430372	116
422216	76	423131	78	423341	84	423903	118	425146	172	427102	341	430373	116
422217	76	423132	78	423351	84	423904	118	425147	172	427103	341	430374	116
422221	78	423133	78	423401	85	423911	118	425151	172	427104	341	430381	116
422222	78	423134	78	423411	85	423912	118	425152	172	427201	341	430601	35
422226	78	423141	76	423421	87	423913	118	425156	172	427202	341	430606	35
422227	78	423151	76	423431	87	423914	118	425157	172	427203	341	430607	35
422231	78	423161	78	423481	85	423921	118	425161	69	427204	341	430608	35
422232	78	423171	78	423491	85	423922	118	425162	69	427211	341	430611	35
422236	78	423181	76	423501	87	423923	118	425166	69	427212	341	430612	35
422237	78	423182	76	423511	87	423924	118	425167	69	427213	341	430613	35
422241	78	423183	76	423601	85	423931	118	425181	65	427214	341	430614	35
422251	78	423184	76	423602	85	423932	118	425182	65	428101	383	430621	35
422261	76	423191	76	423603	85	423933	118	425186	65	428111	383	430631	35
422271	76	423192	76	423604	85	423934	118	425187	65	429001	276	430711	35
422301	82	423193	76	423611	85	424101	121	425191	64	429002	276	430721	35
422302	82	423194	76	423612	85	424102	121	425192	64	429003	276	430722	35
422306	82	423201	78	423613	85	424103	121	425196	64	429004	276	430723	35
422307	82	423202	78	423614	85	424104	121	425197	64	429011	276	430724	35
422311	82	423203	78	423621	87	424111	121	425201	50	429021	277	430801	138
422312	82	423204	78	423622	87	424112	121	425202	50	429022	277	430802	138
422316	82	423211	78	423623	87	424113	121	425206	50	429023	277	430806	138
422317	82	423212	78	423624	87	424114	121	425207	50	429024	277	430807	138
422321	83	423213	78	423631	87	424121	121	425211	50	429031	277	430821	138
422322	83	423214	78	423632	87	424122	121	425212	50	429041	276	430841	138
422326	83	423221	76	423633	87	424123	121	425216	50	429042	276	430901	138
422327	83	423231	76	423634	87	424124	121	425217	50	429043	276	430902	138
422331	83	423241	78	423641	85	424141	149	425261	69	429044	276	430906	138

EMFA

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
430907	138	437203	375	438023	184	443004	159	450602	23	451802	47	454302	158
430921	138	437211	375	438024	184	443101	159	450603	23	451811	47	454303	158
430941	138	437212	375	439001	67	443102	159	450611	23	451812	47	454311	158
431101	140	437213	375	439002	67	443103	159	450612	23	451821	47	454312	158
431102	140	437221	375	439003	67	443104	159	450613	23	451831	47	454313	158
431106	140	437222	375	439004	67	443201	159	450701	23	452001	237	454501	158
431107	140	437223	375	439011	67	443202	159	450702	23	452002	237	454502	158
431202	140	437231	375	439012	67	443203	159	450703	23	452003	237	454503	158
431211	140	437232	375	439013	67	443204	159	450711	23	452011	237	454511	158
431216	140	437233	375	439014	67	443301	159	450712	23	452012	237	454512	158
431217	140	437241	375	439015	67	443302	159	450713	23	452013	237	454513	158
431241	140	437242	375	439101	67	443303	159	450801	23	452101	237	454601	158
431242	140	437243	375	439102	67	443304	159	450802	23	452102	237	454602	158
431243	140	437251	375	439103	67	444001	142	450803	23	452103	237	454603	158
431244	140	437252	375	439104	67	444002	142	450811	23	452111	237	454611	158
431251	140	437253	375	439111	67	444003	142	450812	23	452112	237	454612	158
431401	352	437301	374	439112	67	444004	142	450813	23	452113	237	454613	158
431501	352	437302	374	439113	67	444101	142	451001	47	452201	237	454701	158
431601	140	437303	374	439114	67	444102	142	451002	47	452202	237	454702	158
433101	351	437311	374	439115	67	444103	142	451003	47	452203	237	454703	158
433111	351	437312	374	441001	44	444104	142	451011	47	452211	237	454711	158
434001	177	437313	374	441002	44	444201	142	451012	47	452212	237	454712	158
434002	177	437321	374	441003	44	444202	142	451013	47	452213	237	454713	158
434003	177	437322	374	441004	44	444203	142	451101	47	452501	237	454801	158
434004	177	437323	374	441005	44	444204	142	451102	47	452502	237	454802	158
434011	177	437331	374	441101	44	444301	142	451103	47	452503	237	454803	158
434012	177	437401	373	441102	44	444302	142	451111	47	452511	237	454811	158
434013	177	437402	373	441103	44	444303	142	451112	47	452512	237	454812	158
434014	177	437403	373	441104	44	444304	142	451113	47	452513	237	454813	158
434021	177	437411	373	441105	44	450001	23	451201	47	452601	237	455001	114
434022	177	437412	373	441201	44	450002	23	451202	47	452602	237	455002	114
434023	177	437413	373	441202	44	450003	23	451203	47	452603	237	455003	114
434024	177	437421	373	441203	44	450011	23	451211	47	452611	237	455011	114
434101	185	437501	372	441204	44	450012	23	451212	47	452612	237	455012	114
434102	185	437502	372	441205	44	450013	23	451213	47	452613	237	455013	114
434103	185	437503	372	441301	44	450101	23	451301	47	452701	237	455101	114
434104	185	437511	372	441302	44	450102	23	451302	47	452702	237	455102	114
434111	185	437512	372	441303	44	450103	23	451311	47	452703	237	455103	114
434112	185	437513	372	441304	44	450111	23	451312	47	452711	237	455111	114
434113	185	437521	372	442001	69	450112	23	451321	47	452712	237	455112	114
434114	185	437522	372	442002	69	450113	23	451331	47	452713	237	455113	114
435001	339	437523	372	442003	69	450201	23	451501	47	454001	158	455201	114
435002	339	437531	372	442004	69	450202	23	451502	47	454002	158	455202	114
435003	339	437601	371	442011	69	450203	23	451503	47	454003	158	455203	114
435004	339	437602	371	442012	69	450211	23	451511	47	454011	158	455211	114
435011	339	437603	371	442013	69	450212	23	451512	47	454012	158	455212	114
435012	339	437611	371	442014	69	450213	23	451513	47	454013	158	455213	114
435013	339	437612	371	442015	69	450301	23	451601	47	454101	158	455301	114
435014	339	437613	371	442101	69	450302	23	451602	47	454102	158	455302	114
436001	349	437621	371	442102	69	450303	23	451603	47	454103	158	455303	114
436002	349	438001	184	442103	69	450311	23	451611	47	454111	158	455311	114
436003	349	438002	184	442104	69	450312	23	451612	47	454112	158	455312	114
436011	349	438003	184	442111	69	450313	23	451613	47	454113	158	455313	114
436012	349	438004	184	442112	69	450501	23	451701	47	454201	158	455501	114
436013	349	438011	184	442113	69	450502	23	451702	47	454202	158	455502	114
436021	349	438012	184	442114	69	450503	23	451703	47	454203	158	455503	114
436022	349	438013	184	442115	69	450511	23	451711	47	454211	158	455511	114
436023	349	438014	184	443001	159	450512	23	451712	47	454212	158	455512	114
437201	375	438021	184	443002	159	450513	23	451713	47	454213	158	455513	114
437202	375	438022	184	443003	159	450601	23	451801	47	454301	158	455601	114

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
455602	114	456802	112	459102	239	461202	366	465013	238	471214	53	491104	56
455603	114	456803	112	459103	239	461203	366	465101	238	480001	55	491111	56
455611	114	456811	112	459111	239	461211	366	465102	238	480002	55	491112	56
455612	114	456812	112	459112	239	461212	366	465103	238	480003	55	491113	56
455613	114	456813	112	459113	239	461213	366	465111	238	480004	55	491114	56
455701	114	457001	157	459201	239	462001	366	465112	238	480011	55	491201	56
455702	114	457002	157	459202	239	462002	366	465113	238	480012	55	491202	56
455703	114	457003	157	459203	239	462003	366	465201	238	480013	55	491203	56
455711	114	457011	157	459211	239	462011	366	465202	238	480014	55	491204	56
455712	114	457012	157	459212	239	462012	366	465203	238	480101	55	491211	56
455713	114	457013	157	459213	239	462013	366	465211	238	480102	55	491212	56
455801	114	457101	157	459501	239	462101	366	465212	238	480103	55	491213	56
455802	114	457102	157	459502	239	462102	366	465213	238	480104	55	491214	56
455803	114	457103	157	459503	239	462103	366	470001	54	480111	55	501001	126
455811	114	457111	157	459511	239	462111	366	470002	54	480112	55	501002	126
455812	114	457112	157	459512	239	462112	366	470003	54	480113	55	501003	126
455813	114	457113	157	459513	239	462113	366	470004	54	480114	55	501004	126
456001	112	457201	157	459601	239	462201	366	470011	54	480201	55	502001	126
456002	112	457202	157	459602	239	462202	366	470012	54	480202	55	502002	126
456003	112	457203	157	459603	239	462203	366	470013	54	480203	55	502003	126
456011	112	457211	157	459611	239	462211	366	470014	54	480204	55	502004	126
456012	112	457212	157	459612	239	462212	366	470101	54	480211	55	503001	127
456013	112	457213	157	459613	239	462213	366	470102	54	480212	55	503002	127
456101	112	457301	157	459701	239	463001	167	470103	54	480213	55	503003	127
456102	112	457302	157	459702	239	463002	167	470104	54	480214	55	503004	127
456103	112	457303	157	459703	239	463003	167	470111	54	490001	56	503101	127
456111	112	457311	157	459711	239	463004	167	470112	54	490002	56	503102	127
456112	112	457312	157	459712	239	463011	167	470113	54	490003	56	503103	127
456113	112	457313	157	459713	239	463012	167	470114	54	490004	56	503104	127
456201	112	457501	157	460001	365	463013	167	470201	54	490011	56	503201	127
456202	112	457502	157	460002	365	463014	167	470202	54	490012	56	503202	127
456203	112	457503	157	460003	365	463101	167	470203	54	490013	56	503203	127
456211	112	457511	157	460011	365	463102	167	470204	54	490014	56	503204	127
456212	112	457512	157	460012	365	463103	167	470211	54	490101	56	503601	143
456213	112	457513	157	460013	365	463104	167	470212	54	490102	56	503602	143
456301	112	457601	157	460101	365	463111	167	470213	54	490103	56	503603	143
456302	112	457602	157	460102	365	463112	167	470214	54	490104	56	503604	143
456303	112	457603	157	460103	365	463113	167	471001	53	490111	56	504001	178
456311	112	457611	157	460111	365	463114	167	471002	53	490112	56	504002	178
456312	112	457612	157	460112	365	464001	169	471003	53	490113	56	504003	178
456313	112	457613	157	460113	365	464002	169	471004	53	490114	56	504004	178
456501	112	457701	157	460201	365	464003	169	471011	53	490201	56	504011	178
456502	112	457702	157	460202	365	464004	169	471012	53	490202	56	504012	178
456503	112	457703	157	460203	365	464011	169	471013	53	490203	56	504013	178
456511	112	457711	157	460211	365	464012	169	471014	53	490204	56	504014	178
456512	112	457712	157	460212	365	464013	169	471101	53	490211	56	504021	178
456513	112	457713	157	460213	365	464014	169	471102	53	490212	56	504022	178
456601	112	457801	157	461001	366	464101	169	471103	53	490213	56	504023	178
456602	112	457802	157	461002	366	464102	169	471104	53	490214	56	504024	178
456603	112	457803	157	461003	366	464103	169	471111	53	491001	56	504031	178
456611	112	457811	157	461011	366	464104	169	471112	53	491002	56	504032	178
456612	112	457812	157	461012	366	464111	169	471113	53	491003	56	504033	178
456613	112	457813	157	461013	366	464112	169	471114	53	491004	56	504034	178
456701	112	459001	239	461101	366	464113	169	471201	53	491011	56	504041	178
456702	112	459002	239	461102	366	464114	169	471202	53	491012	56	504042	178
456703	112	459003	239	461103	366	465001	238	471203	53	491013	56	504043	178
456711	112	459011	239	461111	366	465002	238	471204	53	491014	56	504044	178
456712	112	459012	239	461112	366	465003	238	471211	53	491101	56	505201	144
456713	112	459013	239	461113	366	465011	238	471212	53	491102	56	505211	144
456801	112	459101	239	461201	366	465012	238	471213	53	491103	56	505212	144

CODE INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
505213	144	526001	151	551101	30	555201	183	953523	80	953642	222	953911	185
505214	144	526002	151	551111	30	555202	183	953523	97	953651	214	953912	185
506201	144	526003	151	551121	30	555203	183	953523	98	953661	215	953931	185
506211	144	526004	151	551131	30	556001	183	953523	107	953662	215	953941	208
506212	144	526101	151	551151	30	556002	183	953523	132	953663	215	953942	208
506213	144	526102	151	551161	30	556003	183	953523	177	953664	215	953943	208
506214	144	526103	151	551201	30	556101	183	953523	196	953671	227	953944	208
507201	144	526104	151	551211	30	556102	183	953524	82	953672	227	953945	208
507211	144	526201	151	551221	30	556103	183	953524	83	953702	269	953951	210
507212	144	526202	151	551231	30	556201	183	953524	100	953702	270	953954	210
507213	144	526203	151	551251	30	556202	183	953524	101	953703	269	953955	210
507214	144	526204	151	551261	30	556203	183	953524	107	953703	270	953956	309
510001	128	527001	123	551301	30	557001	183	953524	198	953711	184	953957	301
510002	128	527002	123	551302	30	557002	183	953525	84	953711	188	953958	302
510003	128	527003	123	551303	30	557003	183	953525	85	953712	184	953959	303
510004	128	527004	123	551311	30	557101	183	953525	86	953712	188	953960	304
510201	128	527101	123	551312	30	557102	183	953525	87	953713	184	953961	333
511001	128	527102	123	551313	30	557103	183	953525	103	953713	188	954001	216
511002	128	527103	123	551321	30	557201	183	953525	104	953714	61	954001	218
511003	128	527104	123	551322	30	557202	183	953525	108	953714	62	954002	216
511004	128	527201	123	551323	30	557203	183	953525	133	953714	184	954002	218
511201	128	527202	123	551331	30	558001	183	953525	172	953714	188	954003	216
512001	128	527203	123	551332	30	558002	183	953525	200	953715	188	954003	218
512002	128	527204	123	551333	30	558003	183	953525	201	953715	190	955101	39
512003	128	528001	309	552121	115	558101	183	953525	203	953715	192	955102	39
512004	128	528002	309	552122	115	558102	183	953525	205	953715	194	955103	39
512201	128	528003	309	552221	115	558103	183	953531	190	953715	196	955104	39
515201	145	528004	309	552222	115	558201	183	953531	196	953715	198	955105	39
515211	145	528011	309	552301	115	558202	183	953531	198	953715	200	955201	250
515212	145	528012	309	552302	115	558203	183	953531	200	953715	201	955201	287
515213	145	528013	309	552303	115	953501	263	953531	201	953715	203	956101	248
515214	145	528014	309	552311	115	953511	59	953531	203	953715	205	956102	248
516201	145	528101	309	552401	115	953511	167	953531	205	953716	242	956103	248
516211	145	528102	309	552402	115	953521	64	953532	192	953731	230	956104	248
516212	145	528103	309	552403	115	953521	65	953532	194	953732	230		
516213	145	528104	309	552411	115	953521	90	953536	206	953741	231		
516214	145	528111	309	553001	183	953521	91	953541	148	953742	231		
517201	145	528112	309	553002	183	953521	106	953551	183	953751	235		
517211	145	528113	309	553003	183	953521	172	953552	183	953752	235		
517212	145	528114	309	553101	183	953521	190	953553	183	953761	240		
517213	145	529001	311	553102	183	953522	67	953561	183	953771	244		
517214	145	529002	311	553103	183	953522	68	953571	183	953771	245		
520001	129	529003	311	553201	183	953522	69	953581	190	953781	357		
520002	129	529004	311	553202	183	953522	70	953582	192	953781	359		
520003	129	529011	311	553203	183	953522	71	953582	194	953781	360		
520004	129	529012	311	554001	183	953522	72	953583	196	953781	361		
520201	129	529013	311	554002	183	953522	74	953584	198	953781	362		
521001	129	529014	311	554003	183	953522	75	953585	200	953782	359		
521002	129	550101	28	554101	183	953522	92	953585	201	953782	360		
521003	129	550111	28	554102	183	953522	93	953585	203	953782	361		
521004	129	550121	28	554103	183	953522	94	953586	205	953805	190		
521201	129	550131	28	554201	183	953522	95	953591	224	953805	196		
522001	129	550151	28	554202	183	953522	106	953592	224	953805	198		
522002	129	550161	28	554203	183	953522	169	953611	254	953805	200		
522003	129	550201	28	555001	183	953522	172	953621	254	953805	201		
522004	129	550202	28	555002	183	953522	192	953641	219	953805	203		
522201	129	550203	28	555003	183	953522	194	953641	221	953805	205		
525101	179	550211	28	555101	183	953523	76	953641	222	953825	192		
525201	179	550212	28	555102	183	953523	78	953642	219	953825	194		
525301	179	550213	28	555103	183	953523	79	953642	221	953901	185		