

MILET ANI

WALL RECESSED

Class I IP55 IK08

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

EMFA's Ani wall recessed series is specially designed to deliver low-glare lighting to facades, walkways, pathways and driveways with minimal installation depth and narrow trim. The fixture is made of a combination of 316L stainless steel and die cast aluminium. The tilted design reduces the glare of the LED's. The Linear LEDs with special lenses gives excellent wallwashing effect. An anti-slip glass is available upon request.

Cover

316L Stainless steel or Aluminium

Body

Die cast aluminium

Gaskets

Silicone

Diffusers

4 mm Tempered Glass

Screws


316L Stainless Steel

Glands


PG 11

"Customization" is EMFA's standard


EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors, and 2 wattages, and available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

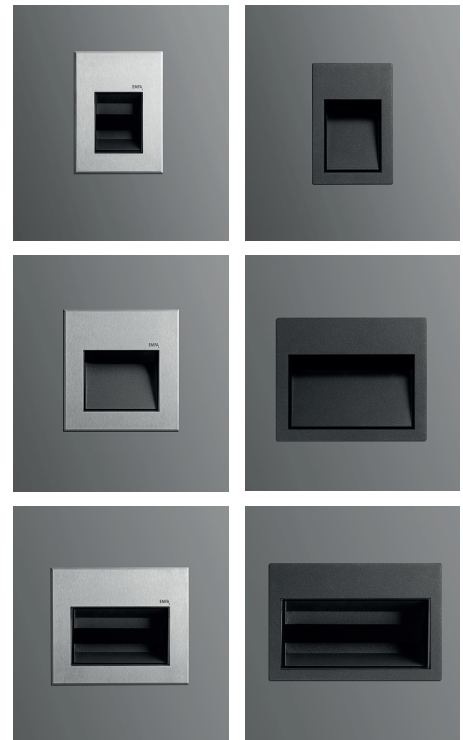

Symmetrical

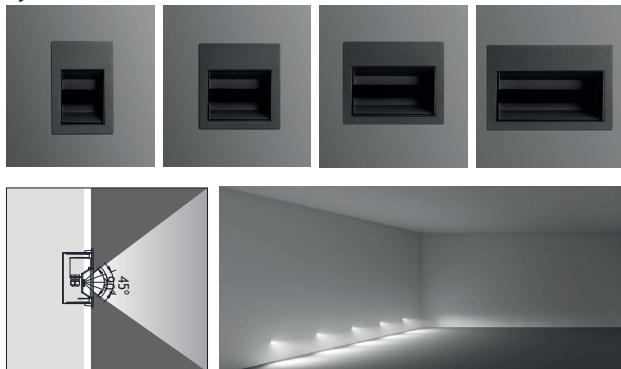


Asymmetrical

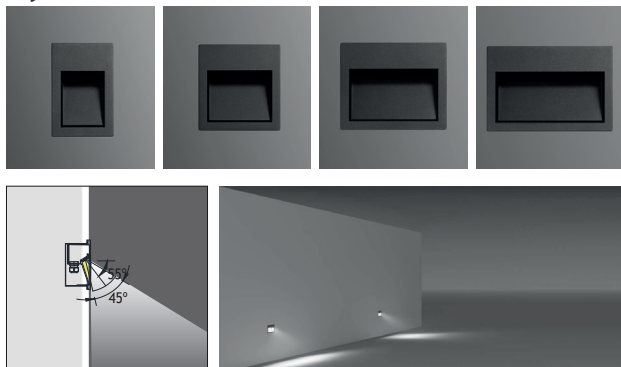

LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.



Galvanized Recessing Box



end of the code number "s" add for Screw mounting option for

Asym. Glass




Trenched Glass



Milky Glass



Clear Glass



Symmetrical




Asymmetrical




Led : Linear LEDs
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
6W	2700 K	570 lm	456003	456503
12W	2700 K	1140 lm	456013	456513
6W	3000 K	570 lm	456001	456501
12W	3000 K	1140 lm	456011	456511
6W	4000 K	690 lm	456002	456502
12W	4000 K	1195 lm	456012	456512

ANI 2




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
12W	2700 K	1140 lm	456103	456603
24W	2700 K	2280 lm	456113	456613
12W	3000 K	1140 lm	456101	456601
24W	3000 K	2280 lm	456111	456611
12W	4000 K	1254 lm	456102	456602
24W	4000 K	2320 lm	456112	456612

ANI 3




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
18W	2700 K	1710 lm	456203	456703
36W	2700 K	3420 lm	456213	456713
18W	3000 K	1710 lm	456201	456701
36W	3000 K	3420 lm	456211	456711
18W	4000 K	1790 lm	456202	456702
36W	4000 K	3520 lm	456212	456712

ANI 4



Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
24W	2700 K	2280 lm	456303	456803
36W	2700 K	3420 lm	456313	456813
24W	3000 K	2280 lm	456301	456801
36W	3000 K	3420 lm	456311	456811
24W	4000 K	2320 lm	456302	456802
36W	4000 K	3520 lm	456312	456812






Symmetrical




Asymmetrical




Led : Linear LEDs
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : 8mm Tempered Glass
Beam Angle : 45° / 60° / 90°
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1m 3x1 H03 VV-F

ANI 1




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
6W	2700 K	570 lm	455003	455503
12W	2700 K	1140 lm	455013	455513
6W	3000 K	570 lm	455001	455501
12W	3000 K	1140 lm	455011	455511
6W	4000 K	690 lm	455002	455502
12W	4000 K	1195 lm	455012	455512

ANI 2




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
12W	2700 K	1140 lm	455103	455603
24W	2700 K	2280 lm	455113	455613
12W	3000 K	1140 lm	455101	455601
24W	3000 K	2280 lm	455111	455611
12W	4000 K	1254 lm	455102	455602
24W	4000 K	2320 lm	455112	455612

ANI 3




Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
18W	2700 K	1710 lm	455203	455703
36W	2700 K	3420 lm	455213	455713
18W	3000 K	1710 lm	455201	455701
36W	3000 K	3420 lm	455211	455711
18W	4000 K	1790 lm	455202	455702
36W	4000 K	3520 lm	455212	455712

ANI 4



Power	Kelvin	Real Lumen Output	Code No	
			Symmetrical	Asymmetrical
24W	2700 K	2280 lm	455303	455803
36W	2700 K	3420 lm	455313	455813
24W	3000 K	2280 lm	455301	455801
36W	3000 K	3420 lm	455311	455811
24W	4000 K	2320 lm	455302	455802
36W	4000 K	3520 lm	455312	455812



SANTOS 6

WALL RECESSED FIXTURES

Class I IP67 IK10

EMFA's Santos 6 Wall Recessed Fixture is specially designed to deliver glare-free lighting in open areas and pathways. The combination of the ribbed glass, which creates a horizontal elliptical light output and the lamp cover, which hides the source of light, allows for an unobtrusive comfortable lighting effect. The fixture is made of a combination of 316L stainless steel and aluminium. The narrow depth of 159 mm allows the fixture to be installed in most walls. The electronic ballast is housed in the thermally separated base of the fixture.

Cover

316L Stainless steel

Body

Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box.

Gaskets

Silicone

Diffusers

5 mm ribbed tempered Glass

Screws

316L Stainless steel

Glands

2 x PG 13.5

Recessing Tube

Polyamide 6


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Diffuser : 12 mm Clear Glass (Frosted Glass on request)


Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

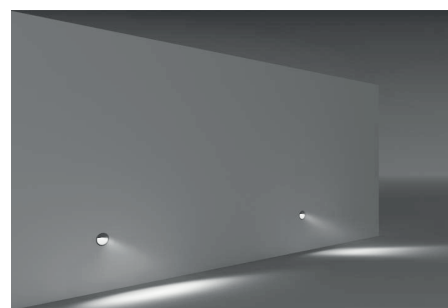

Adjustable

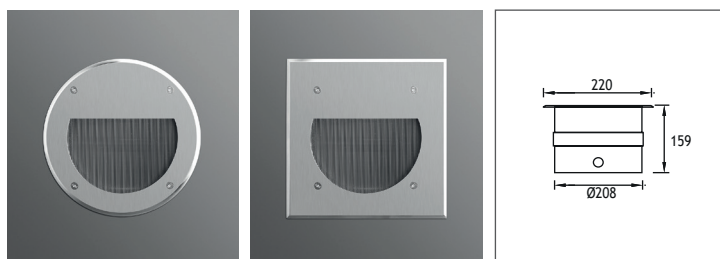

Power	Kelvin	Real Lumen Output	Lens	Code No	
				Symmetrical	Asymmetrical
9W	2700 K	855 lm	10°,23°,36°	552301	552401
18W	2700 K	1710 lm	10°,23°,36°	552311	552411
9W	3000 K	855 lm	10°,23°,36°	552302	552402
18W	3000 K	1710 lm	10°,23°,36°	552121	552221
9W	4000 K	872 lm	10°,23°,36°	552303	552403
18W	4000 K	1744 lm	10°,23°,36°	552122	552222

MIRA

WALL RECESSED FIXTURE

Class I IP67 IK10

The Mira series consists of a range of LED and fluorescent sources to deliver the desired light effect to facades, columns, bridges, monuments, and signs. The series is made of a die cast aluminium body with electrostatic powder paint finished with a 316L stainless steel cover. The recessed versions are for drive over up to 20 kN including a stainless steel recessing box. The surface mounted versions come with a heavy-duty 316L stainless steel bracket. The fixtures come with integrated electronic ballasts and a specially developed potted power cable to effectively bond with the cast resin and stop any water ingress. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Cover

316L Stainless steel

Body

Die cast aluminium

Diffusers

12 mm Tempered Glass

Gaskets

Silicone

Screws

316L Stainless steel

Recessing Box

Stainless steel

Led : Power LEDs


Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : 12 mm Tempered Glass


Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F

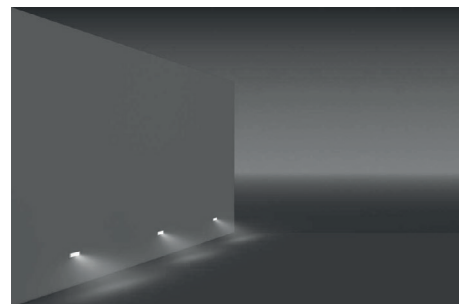

Asymmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
12W	2700 K	1140 lm	10°, 25°, 40°	430374
12W	3000 K	1140 lm	10°, 25°, 40°	430371
12W	4000 K	1160 lm	10°, 25°, 40°	430372
12W	6000 K	1185 lm	10°, 25°, 40°	430373
27W	RGB		25°, 40°	430381





COB LED



Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : Clear Glass 8mm (Frosted Glass on request)

CRI : >80 or >90


Cable : Potted 1 m 3x1 H03 VV-F

Belkis 3 Fix to Recessing Tube with Silicone





Power	Kelvin	Real Lumen Output	Code No	
			Round	Square
7W LED	2700 K	665 lm	423263	423283
7W LED	3000 K	665 lm	423261	423281
7W LED	4000 K	678 lm	423262	423282
7W LED	6000 K	690 lm	423264	423284

Belkis 3 Fix to Recessing Tube with Screws





Power	Kelvin	Real Lumen Output	Code No	
			Round	Square
7W LED	2700 K	665 lm	423273	423293
7W LED	3000 K	665 lm	423271	423291
7W LED	4000 K	678 lm	423272	423292
7W LED	6000 K	690 lm	423274	423294

Belkis 4 Fix to Recessing Tube with Silicone



Power	Kelvin	Real Lumen Output	Code No	
			Round	Square
11W LED	2700 K	1045 lm	423903	423923
11W LED	3000 K	1045 lm	423901	423921
11W LED	4000 K	1065 lm	423902	423922
11W LED	6000 K	1087 lm	423904	423924

Belkis 4 Fix to Recessing Tube with Screws



Power	Kelvin	Real Lumen Output	Code No	
			Round	Square
11W LED	2700 K	1045 lm	423913	423933
11W LED	3000 K	1045 lm	423911	423931
11W LED	4000 K	1065 lm	423912	423932
11W LED	6000 K	1087 lm	423914	423934

MILET WALL RECESSED FIXTURES

IP65 IK08

Available in any of these RAL colors

7004	7016	9005	9016	6002	1015
------	------	------	------	------	------

Cover

Die cast aluminium / Inox (Stainless steel)

Paint

Black or grey electrostatic powder

Body

Die cast aluminium

Recessing Box

Polycarbonate

Glands

1 X PG 9

Gaskets


Silicone

Diffusers

4 mm Tempered Glass




Symmetrical Inox





Power	Lampholder	Reflector	Code No	
			Round	Square
35W HALOGEN	Gu5,3 12V	10°,38°	308111	306111
40W HALOGEN	G 9		308121	306121
50W HALOGEN	Gu10	10°,38°	308131	306131

Symmetrical Aluminium





Power	Lampholder	Reflector	Code No	
			Round	Square
35W HALOGEN	Gu5,3 12V	10°,38°	304111	302111
40W HALOGEN	G 9		304121	302121
50W HALOGEN	Gu10	10°,38°	304131	302131

Asymmetrical Inox



Power	Lampholder	Reflector	Code No	
			Round	Square
35W HALOGEN	Gu5,3 12V	10°,38°	303111	305111
40W HALOGEN	G 9		303121	305121
50W HALOGEN	Gu10	10°,38°	303131	305131

Asymmetrical Aluminium




Power	Lampholder	Reflector	Code No	
			Round	Square
35W HALOGEN	Gu5,3 12V	10°,38°	307111	301111
40W HALOGEN	G 9		307121	301121
50W HALOGEN	Gu10	10°,38°	307131	301131

BELKIS MINI

WALL RECESSED FIXTURES

Class I IP65 IK08

Available in any
of these RAL colors




Cover
316L Stainless steel or Aluminium
Body
Die cast aluminium
Recessing Box
Aluminium
Gaskets
Silicone
Diffusers
Tempered Glass
Screws
316L Stainless steel

Voltage : 240 VAC with integrated driver
(12-24 VDC on request)
Diffuser : Clear Glass 4mm (Frosted Glass on request)
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

Single color LED options upon request are ;
 Blue
 Amber
 Green
 Red





Symmetrical





Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	309001
1W LED	3000 K	95 lm	10°,25°,40°	309002
1W LED	4000 K	97 lm	10°,25°,40°	309003
1W LED	6000 K	99 lm	10°,25°,40°	309004
3W LED	2700 K	380 lm	10°,25°,40°	309011
3W LED	3000 K	380 lm	10°,25°,40°	309012
3W LED	4000 K	387 lm	10°,25°,40°	309013
3W LED	6000 K	395 lm	10°,25°,40°	309014

Symmetrical Deep




Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	309101
1W LED	3000 K	95 lm	10°,25°,40°	309102
1W LED	4000 K	97 lm	10°,25°,40°	309103
1W LED	6000 K	99 lm	10°,25°,40°	309104
3W LED	2700 K	380 lm	10°,25°,40°	309111
3W LED	3000 K	380 lm	10°,25°,40°	309112
3W LED	4000 K	387 lm	10°,25°,40°	309113
3W LED	6000 K	395 lm	10°,25°,40°	309114

Asymmetrical



Power	Kelvin	Real Lumen Output	Lens	Code No
1W LED	2700 K	95 lm	10°,25°,40°	309201
1W LED	3000 K	95 lm	10°,25°,40°	309202
1W LED	4000 K	97 lm	10°,25°,40°	309203
1W LED	6000 K	99 lm	10°,25°,40°	309204
3W LED	2700 K	380 lm	10°,25°,40°	309211
3W LED	3000 K	380 lm	10°,25°,40°	309212
3W LED	4000 K	387 lm	10°,25°,40°	309213
3W LED	6000 K	395 lm	10°,25°,40°	309214




Honeycomb
Code No: 953714

BELKIS 1 LL WALL RECESSED FIXTURES

IP65 IK08

Available in any
of these RAL colors



Body

Die cast aluminium

Paint




Electrostatic powder

Diffusers

Tempered Glass


Gaskets

Silicone

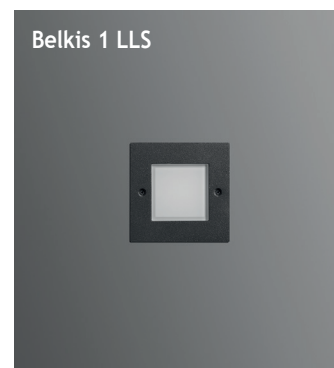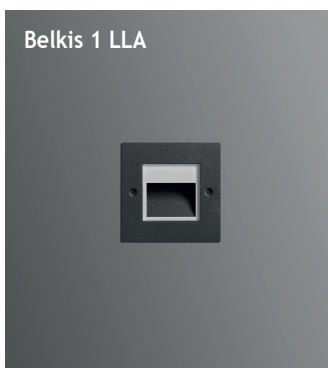



Led : Linear LEDs
Voltage : 240 VAC with integrated driver
 (12-24 VDC on request)
Diffuser : 4 mm Tempered Clear Glass or Milky Glass
Mac Adam : 3
CRI : >80 or >90
Cable : Potted 1 m 3x1 H03 VV-F

LLA Asymmetrical




Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424103
3W	3000 K	285 lm	424101
3W	4000 K	290 lm	424102
3W	6000 K	296 lm	424104

LLS Asymmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424113
3W	3000 K	285 lm	424111
3W	4000 K	290 lm	424112
3W	6000 K	296 lm	424114


LLS Symmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	424123
3W	3000 K	285 lm	424121
3W	4000 K	290 lm	424122
3W	6000 K	296 lm	424124



Available in any
of these RAL colors



Body

Die cast aluminium

Paint


Electrostatic powder

Diffusers

Tempered Glass

Gaskets

Silicone

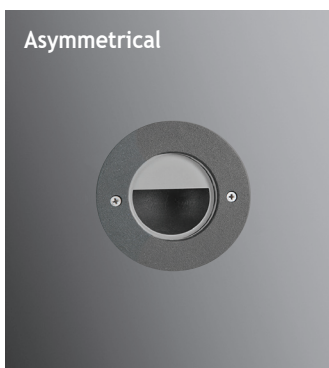

Led : COB LEDs


Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : 4 mm Tempered Clear Glass or Frosted Glass


Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F




Asymmetrical




Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527003
3W	3000 K	285 lm	527001
3W	4000 K	290 lm	527002
3W	6000 K	296 lm	527004

Symmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527103
3W	3000 K	285 lm	527101
3W	4000 K	290 lm	527102
3W	6000 K	296 lm	527104


Symmetrical



Power	Kelvin	Real Lumen Output	Code No
3W	2700 K	285 lm	527203
3W	3000 K	285 lm	527201
3W	4000 K	290 lm	527202
3W	6000 K	296 lm	527204



Available in any
of these RAL colors



Body

Steel or Inox (Stainless Steel)

Paint

Electrostatic powder

Reflector

Anodized aluminium

Recessing Box

Galvanized steel
(only for in wall series)

Diffuser

4 mm Clear Glass



Led : Linear LEDs


Voltage : 240 VAC with integrated driver
(12-24 VDC on request)

Diffuser : 4 mm Tempered Clear Glass or Frosted Glass


Mac Adam : 3

CRI : >80 or >90

Cable : Potted 1 m 3x1 H03 VV-F





140x70




Power	Kelvin	Real Lumen Output	Code No	
			Steel	Inox
1W	2700 K	95 lm	349002	349012
1W	3000 K	95 lm	349001	349011
1W	4000 K	97 lm	349003	349013
1W	6000 K	99 lm	349004	349014

70x140




Power	Kelvin	Real Lumen Output	Code No	
			Steel	Inox
3W	2700 K	285 lm	349101	349111
3W	3000 K	285 lm	349102	349112
3W	4000 K	290 lm	349103	349113
3W	6000 K	296 lm	349104	349114




Cover & Body
Glass reinforced polyester
Screws
Inox
Gasket
Silicone
Glass
Tempered
Recessing Box
Galvanized steel



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Symmetrical



Power	Lampholder	Kelvin	Code No
6W	LED	2700 K	502001
6W	LED	3000 K	502002
6W	LED	4000 K	502003
6W	LED	6000 K	502004
2x 18W FLUO.	G24 d-2		502111
2x 26W FLUO.	G24 d-3		502121

Asymmetrical




Power	Lampholder	Kelvin	Code No
6W	LED	2700 K	501001
6W	LED	3000 K	501002
6W	LED	4000 K	501003
6W	LED	6000 K	501004
2x 18W FLUO.	G24 d-2		501011
2x 26W FLUO.	G24 d-3		501121

SLIM PYRAMID

WALL RECESSED FIXTURES IP65 IK08


Available in any
of these RAL colors




Cover & Body
Glass reinforced polyester
Screws
Inox
Gasket
Silicone
Glass
Tempered
Recessing Box
Galvanized steel



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Symmetrical




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	503001
9W	LED	3000 K	503002
9W	LED	4000 K	503003
9W	LED	6000 K	503004
1x 18W FLUO.	G24 d-2		503011
1x 26W FLUO.	G24 d-3		503021

Asymmetrical



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	503101
9W	LED	3000 K	503102
9W	LED	4000 K	503103
9W	LED	6000 K	503104
1x 18W FLUO.	G24 d-2		503111
1x 26W FLUO.	G24 d-3		503121

Asymmetrical




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	503201
9W	LED	3000 K	503202
9W	LED	4000 K	503203
9W	LED	6000 K	503204
1x 18W FLUO.	G24 d-2		503211
1x 26W FLUO.	G24 d-3		503221

SIDE WALL RECESSED FIXTURES

IP65 IK08


Available in any
of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Side 4




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	510001
9W	LED	3000 K	510002
9W	LED	4000 K	510003
9W	LED	6000 K	510004
75W HALOGEN	E27		510201
1x 26W FLUO.	G24 d-3		510221

Side 5



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	511001
9W	LED	3000 K	511002
9W	LED	4000 K	511003
9W	LED	6000 K	511004
75W HALOGEN	E27		511201
1x 26W FLUO.	G24 d-3		511221

Side 6




Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	512001
9W	LED	3000 K	512002
9W	LED	4000 K	512003
9W	LED	6000 K	512004
75W HALOGEN	E27		512201
1x 26W FLUO.	G24 d-3		512221

PERGE

WALL RECESSED FIXTURES IP65 IK08


Available in any
of these RAL colors




Body
Die Cast Aluminium
Cover
Die Cast Aluminium
Paint
Electrostatic powder paint
Diffuser
Polycarbonate



Voltage : 240 VAC with integrated driver
(24V AC or DC on request)
Cable : Potted 1 m 3x1 H03 VV-F




Perge 4





Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	520001
9W	LED	3000 K	520002
9W	LED	4000 K	520003
9W	LED	6000 K	520004
75W HALOGEN	E27		520201
1x 26W FLUO.	G24 d-3		520221

Perge 5



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	521001
9W	LED	3000 K	521002
9W	LED	4000 K	521003
9W	LED	6000 K	521004
75W HALOGEN	E27		521201
1x 26W FLUO.	G24 d-3		521221

Perge 6



Power	Lampholder	Kelvin	Code No
9W	LED	2700 K	522001
9W	LED	3000 K	522002
9W	LED	4000 K	522003
9W	LED	6000 K	522004
75W HALOGEN	E27		522201
1x 26W FLUO.	G24 d-3		522221