


CERAMUS MINI LED APPLIQUES

Class I IP65

Available in any of these RAL colors






Body
Die cast aluminium

Paint
Electrostatic powder

Bracket
Die cast aluminium

Diffuser
Tempered Glass or acrylic

Gaskets
Silicon

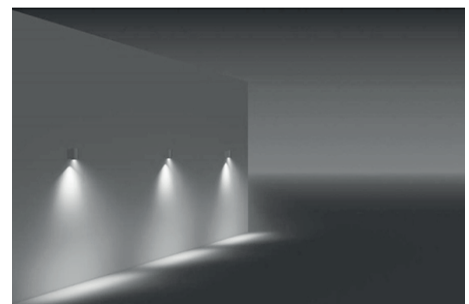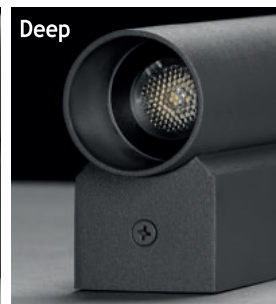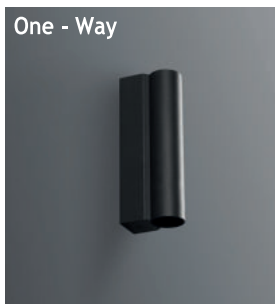

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Pipe : Length can be adjusted upon request

POWERLED

	6000 K	Total Lighting Output		
		1W	3W	1W
☀ Cool White	6000 K	102 lm	270 lm	463003

