

INOX

SURFACE MOUNTED CEILING FIXTURES

Class I IP65 IK08

The Inox surface series consists of a range of LED, metal halide and halogen sources to deliver the desired light effect to facades and columns. The series is made of die cast aluminium and extrusion aluminium painted with electrostatic powder paint. 6 standard RAL colors can be chosen from to adapt the spots to their environment. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber and RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.

Body

316L Stainless Steel

Cover

316L Stainless Steel

Finish

Polished

Diffusers


Tempered Glass

Gaskets

Silicone

Connection

IP connection box



“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 6 standard paint colors, 8 LED colors and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.

LEDs

Only highest quality LEDs such as Cree or Toplite are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2020. At 2700K, 3000K, and 4000K LED lumen output per led is 110lm; at 6000K the lumen output per led is 125lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.



Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA’s laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

INOX

SURFACE MOUNTED CEILING FIXTURES

Class I IP65 IK08

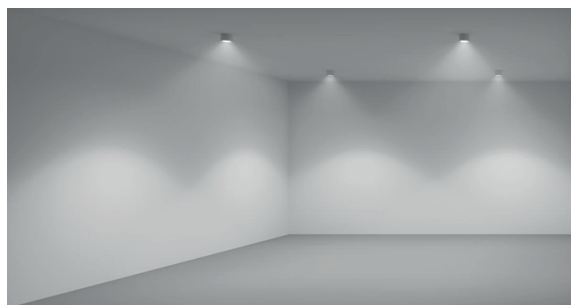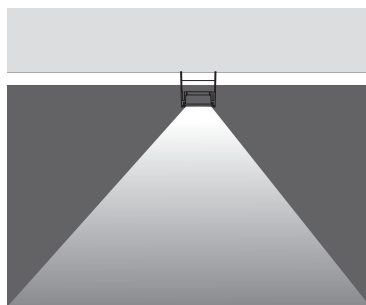


INOX 1 SURFACE

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F




	1x15W/20W CREE COB LED	Code No	Code No	
			Polished	Brushed
☀	Warm White 3000 K	136001	136011	
☁	Natural White 4000 K	136002	136012	

INOX 2 SURFACE

Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F



	1x15W/20W/30W CREE COB LED	Code No	Code No	
			Polished	Brushed
☀	Warm White 3000 K	136021	136031	
☁	Natural White 4000 K	136022	136032	