
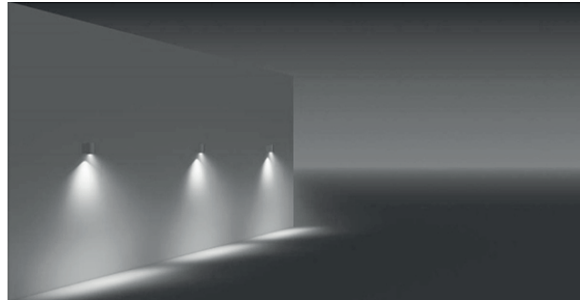


INOX

SQUARE ONE-WAY APPLIQUES

Class I IP65 IK08

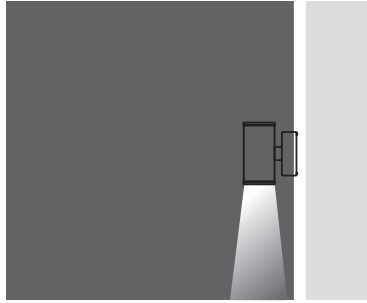

INOX 1 SQUARE ONE WAY


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°


Cable : Potted 5 m 3x0,75 H03 VV-F

	1x6W or 1x20W CREE COB LED	Code No	
		6W	20W
☀ Warm White	3000 K	135201	135211
☁ Natural White	4000 K	135202	135212

6W



20W

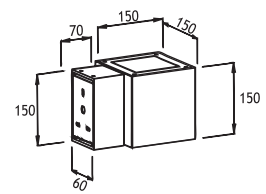

INOX 2 SQUARE ONE WAY


Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°


Cable : Potted 5 m 3x0,75 H03 VV-F

	1x6W or 1x20W CREE COB LED	Code No	
		6W	20W
☀ Warm White	3000 K	135221	135231
☁ Natural White	4000 K	135222	135232

6W





20W

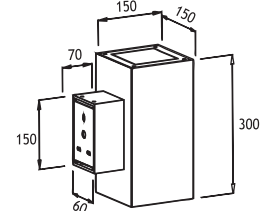

INOX SQUARE TWO-WAY APPLIQUES

Class I IP65 IK08

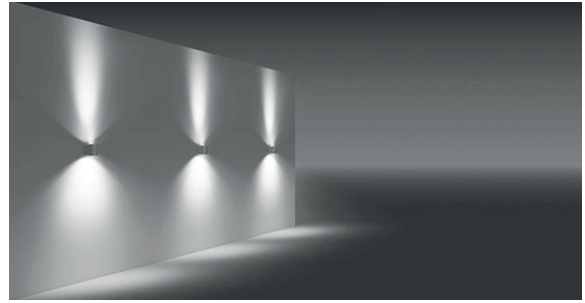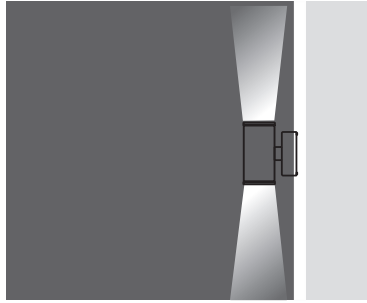

INOX 1 SQUARE TWO WAY



Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

2x4W

2x15W

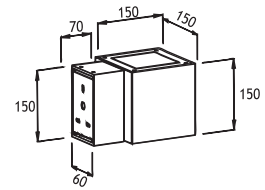

	2x4W or 2x15W CREE COB LED	Code No	
		Polished	Brushed
☀ Warm White	3000 K	135301	135311
☁ Natural White	4000 K	135302	135312

INOX 2 SQUARE TWO WAY



Voltage : 240V A.C with integrated driver
(24V AC or DC on request)

Lens : 24° / 36° / 60°

Cable : Potted 5 m 3x0,75 H03 VV-F

2x4W

2x15W

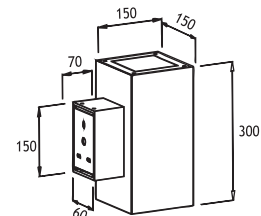

	2x4W or 2x15W CREE COB LED	Code No	
		Polished	Brushed
☀ Warm White	3000 K	135321	135331
☁ Natural White	4000 K	135322	135332