


PATNOS 2 RECESSED LED FIXTURES

Class I IP67 IK10


Asymmetrical 25° Tilted PATNOS 2 Fix to Recessing Tube with Silicone

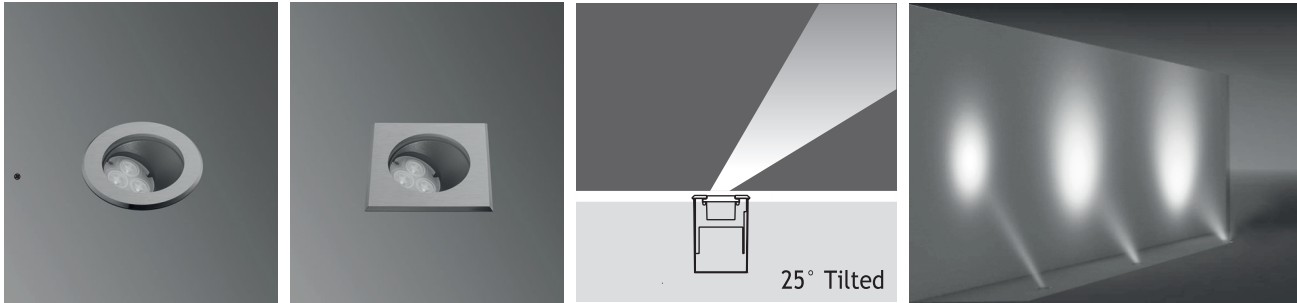


		Total Lighting Output		3W Round	3W Square	9W Round	9W Square
		3W	9W				
☀ Warm White	3000 K	255 lm	675 lm	161441	161451	161481	161491
☀ Natural White	4500 K	255 lm	675 lm	161442	161452	161482	161492
☀ Cool White	6000 K	310 lm	810 lm	161443	161453	161483	161493
🌈 RGB						161521	161531

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

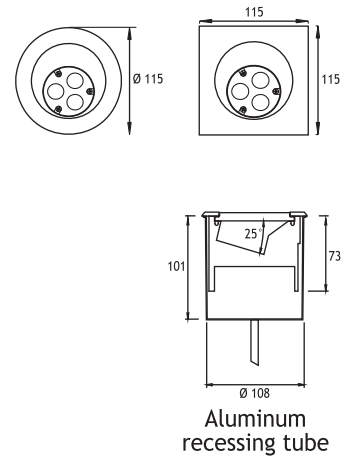


Asymmetrical 25° Tilted PATNOS 2 Fix to Recessing Tube with Screws

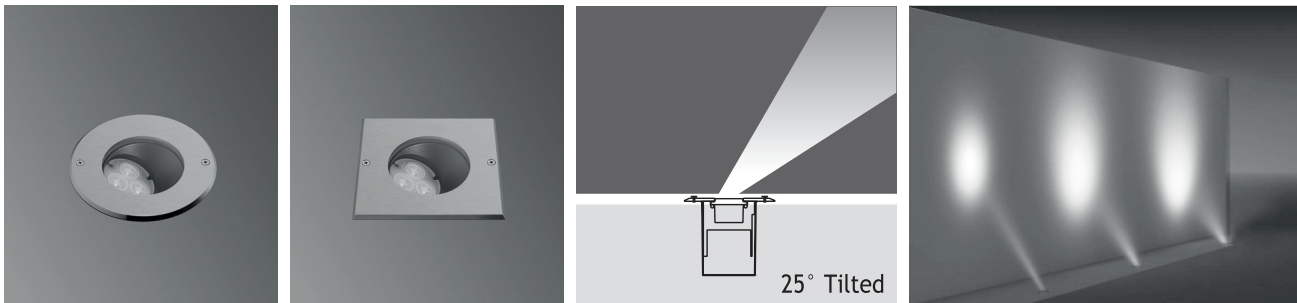

		Total Lighting Output		3W Round	3W Square	9W Round	9W Square
		3W	9W				
☀ Warm White	3000 K	255 lm	675 lm	161461	161471	161501	161511
☀ Natural White	4500 K	255 lm	675 lm	161462	161472	161502	161512
☀ Cool White	6000 K	310 lm	810 lm	161463	161473	161503	161513
🌈 RGB						161541	161551

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

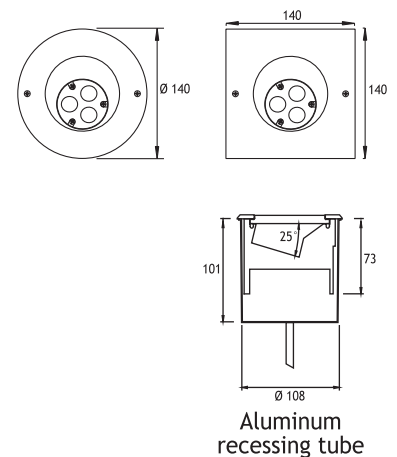




PATNOS 2 RECESSED LED FIXTURES

Class I IP67 IK10


Asymmetrical 15° Tilted PATNOS 2 Fix to Recessing Tube with Silicone

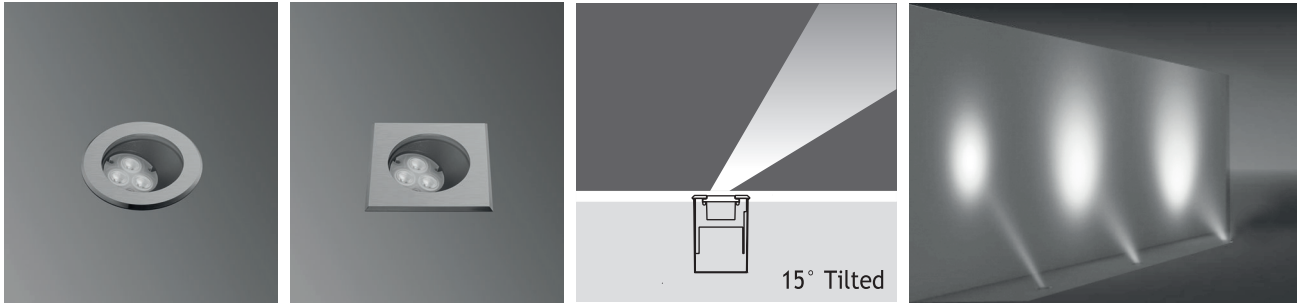


		Total Lighting Output		3W Round	3W Square	9W Round	9W Square
		3W	9W				
☀ Warm White	3000 K	255 lm	675 lm	161321	161331	161361	161371
☀ Natural White	4500 K	266 lm	675 lm	161322	161332	161362	161372
☀ Cool White	6000 K	306 lm	810 lm	161323	161333	161363	161373
🌈 RGB						161401	161411

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

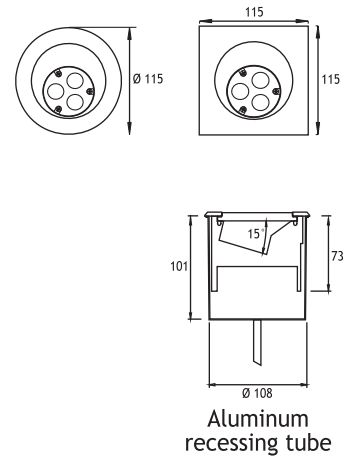

Asymmetrical 15° Tilted PATNOS 2 Fix to Recessing Tube with Screws

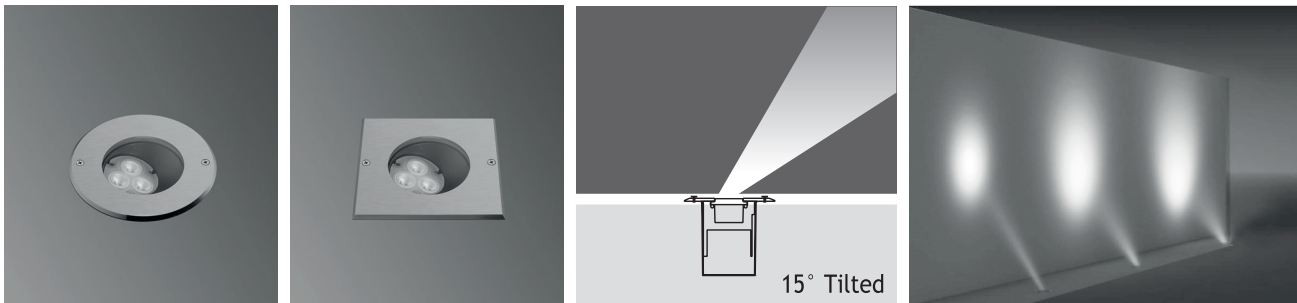

		Total Lighting Output		3W Round	3W Square	9W Round	9W Square
		3W	9W				
☀ Warm White	3000 K	255 lm	675 lm	161341	161351	161381	161391
☀ Natural White	4500 K	266 lm	675 lm	161342	161352	161382	161392
☀ Cool White	6000 K	306 lm	810 lm	161343	161353	161383	161393
🌈 RGB						161421	161431

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

