


PATNOS 3 RECESSED LED FIXTURES


Class I IP67 IK10

Asymmetrical 15° Tilted PATNOS 3 Fix to Recessing Tube with Silicone

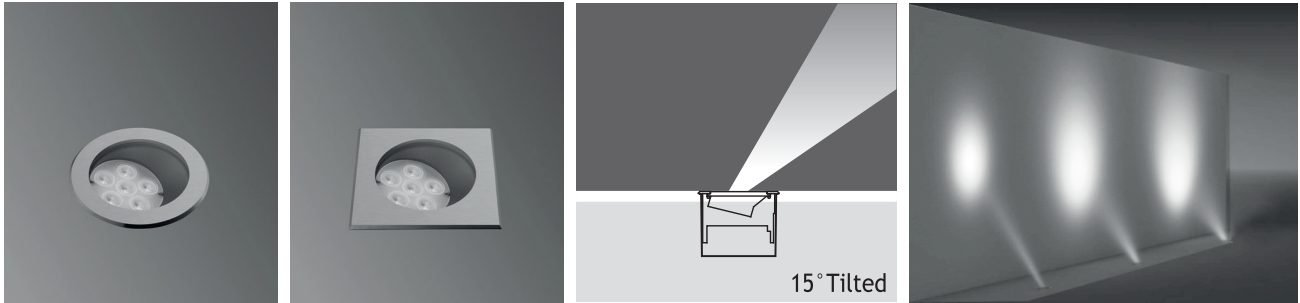

6 x 350 mA (6 W) LED		Total Lighting Output	Code No	
			Round	Square
Warm White	3000 K	510 lm	162201	162211
Natural White	4500 K	510 lm	162202	162212
Cool White	6000 K	612 lm	162203	162213
RGB			162241	162251

Single color LED options upon request are ;
 Blue Amber Green Red

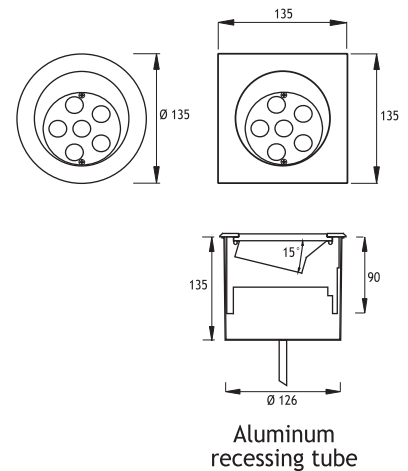

Voltage : 240V A.C with integrated driver (24V AC or DC on request)


Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 H03 VV-F


Available with springs for false ceiling.

Asymmetrical 15° Tilted PATNOS 3 Fix to Recessing Tube with Screws

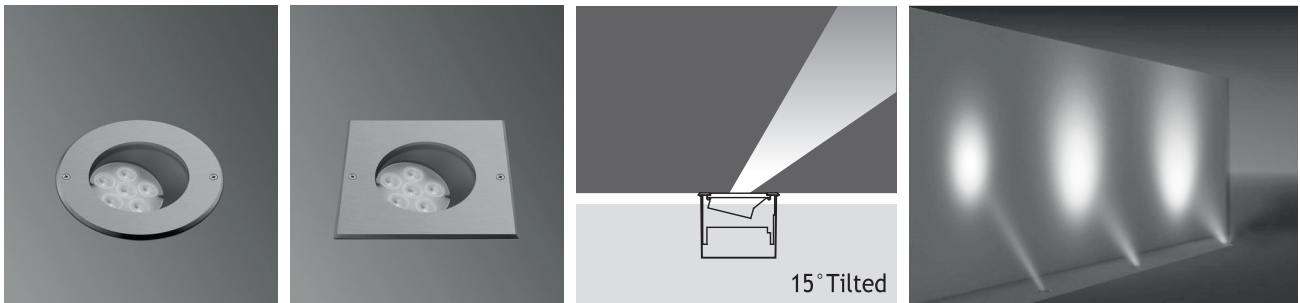

6 x 350 mA (6 W) LED		Total Lighting Output	Code No	
			Round	Square
Warm White	3000 K	510 lm	162221	162231
Natural White	4500 K	510 lm	162222	162232
Cool White	6000 K	612 lm	162223	162233
RGB			162261	162271

Single color LED options upon request are ;
 Blue Amber Green Red

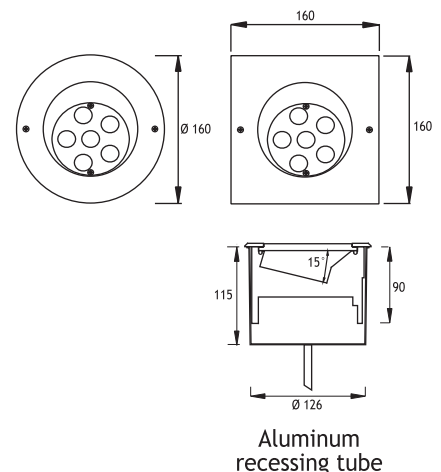

Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)


Cable : Potted 5 m 3x0,75 H03 VV-F

Available with springs for false ceiling.

PATNOS 3 RECESSED LED FIXTURES

Class I IP67 IK10

Asymmetrical 25° Tilted PATNOS 3 Fix to Recessing Tube with Silicone

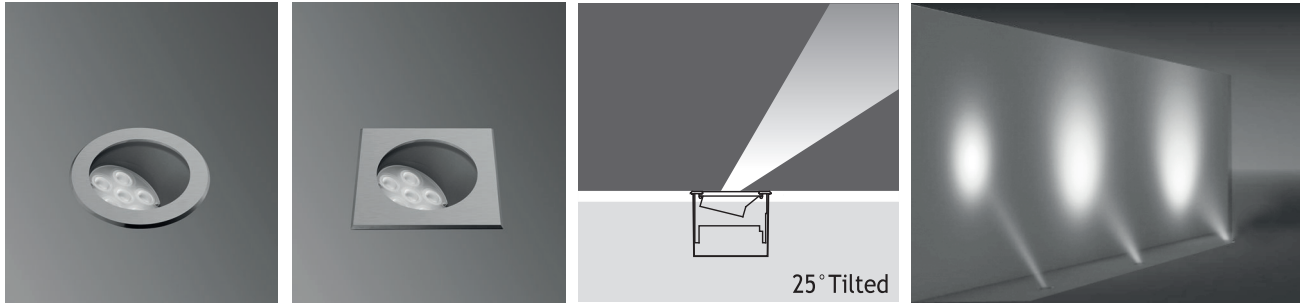

6 x 350 mA (6 W) LED		Total Lighting Output	Code No	
			Round	Square
Warm White	3000 K	510 lm	162281	162291
Natural White	4500 K	510 lm	162282	162292
Cool White	6000 K	612 lm	162283	162293
RGB			162321	162331

Single color LED options upon request are ;
 Blue Amber Green Red


Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Lens : 10°, 25°, 40°


Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

Available with springs for false ceiling.

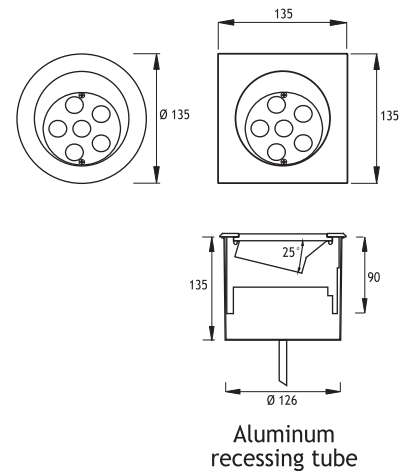

Asymmetrical 25° Tilted PATNOS 3 Fix to Recessing Tube with Screws

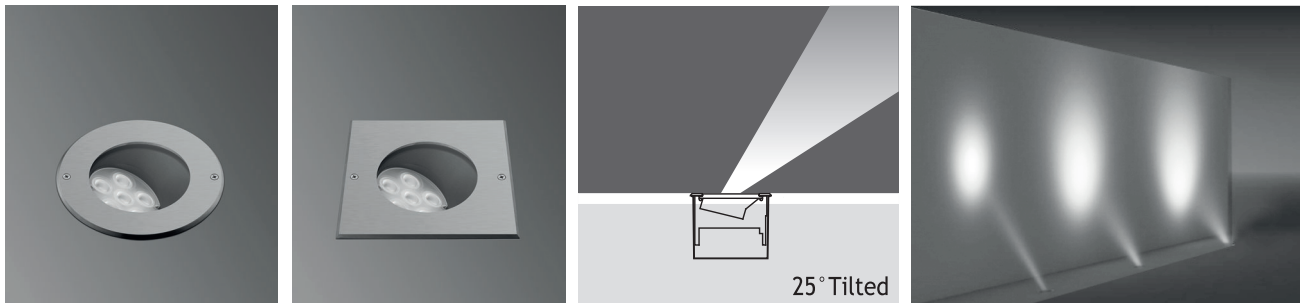

6 x 350 mA (6 W) LED		Total Lighting Output	Code No	
			Round	Square
Warm White	3000 K	510 lm	162301	162311
Natural White	4500 K	510 lm	162302	162312
Cool White	6000 K	612 lm	162303	162313
RGB			162341	162351

Single color LED options upon request are ;
 Blue Amber Green Red

Voltage : 240V A.C with integrated driver (24V AC or DC on request)

Lens : 10°, 25°, 40°

Diffuser : Clear Glass 8 mm (Frosted Glass on request)

Cable : Potted 5 m 3x0,75 H03 VV-F

Available with springs for false ceiling.

