


PATNOS 5 RECESSED LED FIXTURES

Class I IP67 IK10


Asymmetrical 15° Tilted PATNOS 5 Fix to Recessing Tube with Silicone

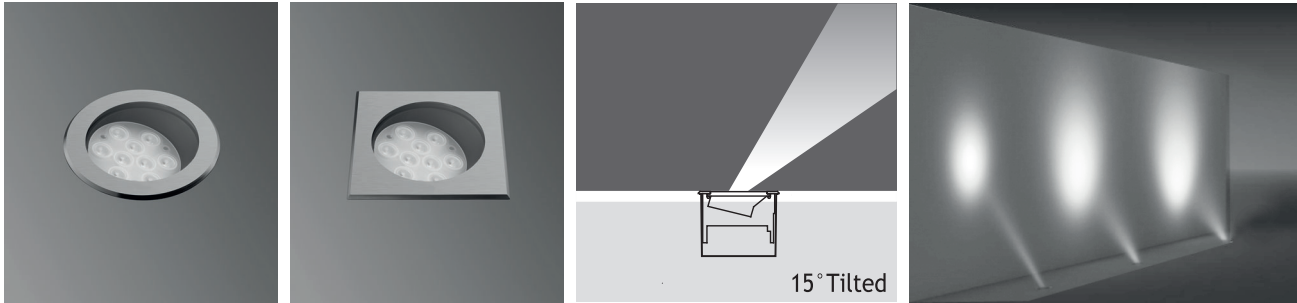


	9 x 350 mA (9 W) LED 9 x 700 mA (27 W) LED	Total Lighting Output	9W		27W		
			9W	27W	9W Round	9W Square	27W Round
☀ Warm White	3000 K	765 lm	2100 lm	164201	164211	164701	164711
☀ Natural White	4500 K	765 lm	2100 lm	164202	164212	164702	164712
☀ Cool White	6000 K	918 lm	2520 lm	164203	164213	164703	164713
🌈 RGB						164241	164251

Single color LED options upon request are ;
● Blue ● Amber ● Green ● Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

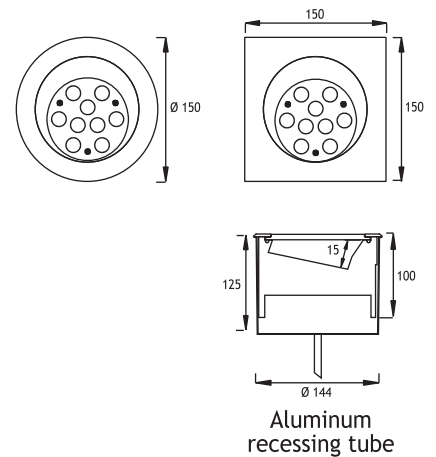


Asymmetrical 15° Tilted PATNOS 5 Fix to Recessing Tube with Screws

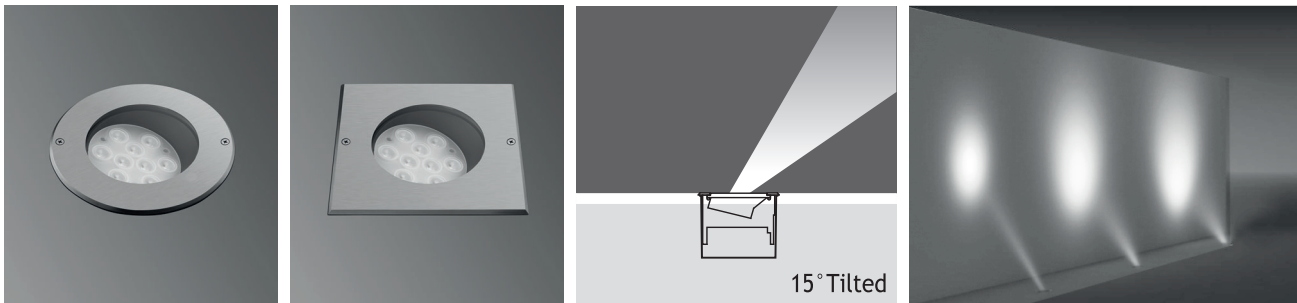

	9 x 350 mA (9 W) LED 9 x 700 mA (27 W) LED	Total Lighting Output	9W		27W		
			9W	27W	9W Round	9W Square	27W Round
☀ Warm White	3000 K	765 lm	2100 lm	164221	164231	164721	164731
☀ Natural White	4500 K	765 lm	2100 lm	164222	164232	164722	164732
☀ Cool White	6000 K	918 lm	2520 lm	164223	164233	164723	164733
🌈 RGB						164261	164271

Single color LED options upon request are ;
● Blue ● Amber ● Green ● Red


- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

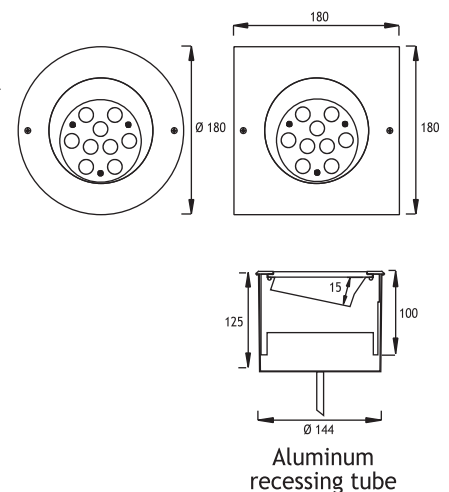

PATNOS 5 RECESSED LED FIXTURES

Class I IP67 IK10


Asymmetrical 25° Tilted PATNOS 5 Fix to Recessing Tube with Silicone

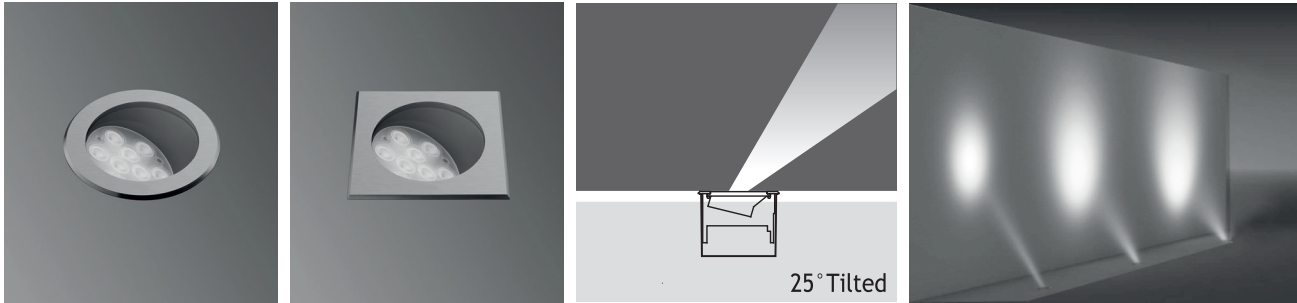


		Total Lighting Output		9W	9W	27W	27W
		9W	27W	Round	Square	Round	Square
☀️	Warm White 3000 K	765 lm	2100 lm	164281	164291	164741	164751
☀️	Natural White 4500 K	765 lm	2100 lm	164282	164292	164742	164752
☀️	Cool White 6000 K	918 lm	2520 lm	164283	164293	164743	164753
🌈	RGB					164321	164331

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

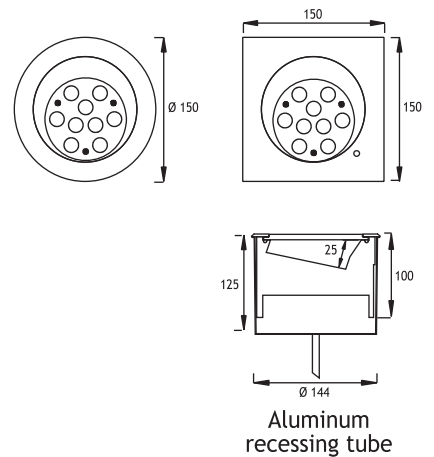

Asymmetrical 25° Tilted PATNOS 5 Fix to Recessing Tube with Screws

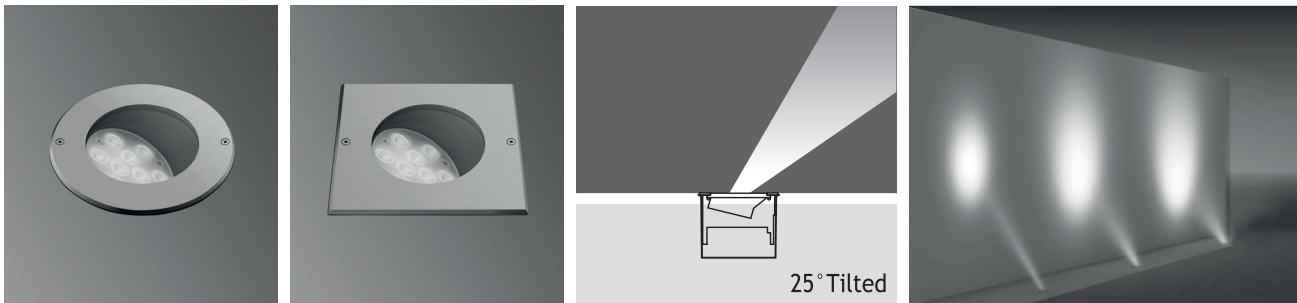

		Total Lighting Output		9W	9W	27W	27W
		9W	27W	Round	Square	Round	Square
☀️	Warm White 3000 K	765 lm	2100 lm	164301	164311	164761	164771
☀️	Natural White 4500 K	765 lm	2100 lm	164302	164312	164762	164772
☀️	Cool White 6000 K	918 lm	2520 lm	164303	164313	164763	164773
🌈	RGB					164341	164351

Single color LED options upon request are ;
 🟦 Blue 🟡 Amber 🟢 Green 🔴 Red

- Voltage** : 240V A.C with integrated driver (24V AC or DC on request)
- Lens** : 10°, 25°, 40°
- Diffuser** : Clear Glass 8 mm (Frosted Glass on request)
- Cable** : Potted 5 m 3x0,75 H03 VV-F

