


# PYRAMID



## RECESSED FIXTURES

### Class II IP55 IK08

Available in any of these RAL colors




- Cover & Body**
- Glass reinforced polyester
- Screws**
- Inox
- Gasket**
- Silicone
- Glass**
- Tempered
- Recessing Box**
- Galvanized steel

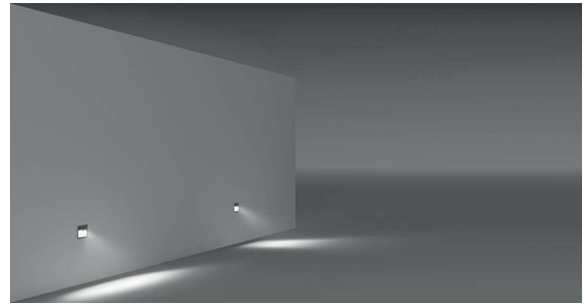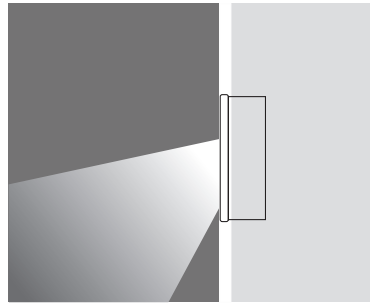

**Voltage** : 240V A.C with integrated driver  
(24V AC or DC on request)

**Cable** : Potted 5 m 3x0,75 H03 VV-F

		Total Lighting Output	Code No
2 x 350 mA (2x3 W) LINEAR LED			
☀ Warm White	3000 K	700 lm	501201

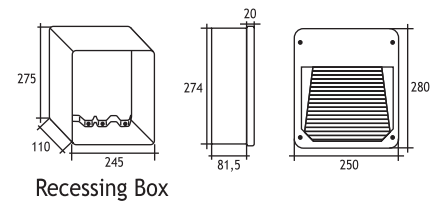

Lampholder: G24 d-2

1 x FLUO. 18W	Code No
	501101



Lampholder: G24 d-3

1 x FLUO. 26W	Code No
	501111

Lampholder: G8.5

1 x METAL HALIDE 35W	Code No
	501121

# PYRAGLASS

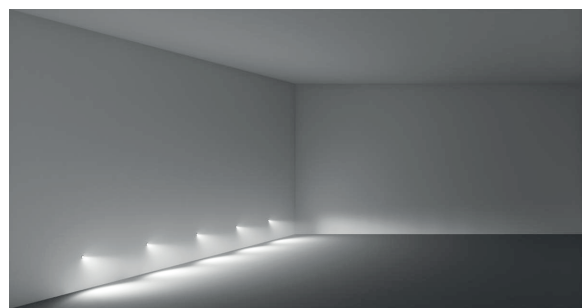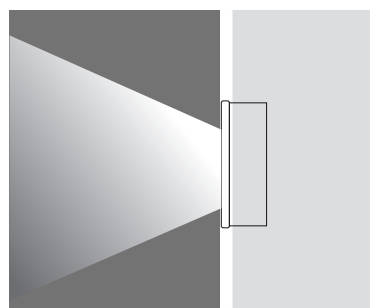

Lampholder: G24 d-1

3 x FLUO. 9W	Code No
	502101

Lampholder: G24 d-2

2 x FLUO. 18W	Code No
	502111

Lampholder: G24 d-3

2 x FLUO. 26W	Code No
	502121

