



ASSOS 6 RECESSED DRIVE OVER FIXTURES

Load 15 kN | Class I IP67 IK10

EMFA's Assos 6 series is specially designed to light facades, columns, monuments and trees. The fixture can be equipped with metal halide, halogen or fluorescent lamps. The fixture is made of a combination of 316L stainless steel and die cast aluminium, which allows for IP67 and IK10 and a load of 15kN. The fixture comes with a polyamide recessing tube for easy mounting in the ground or concrete. A louvre can be ordered separately to reduce the glare of the lamps. An anti-slip glass is available upon request.

- Cover**
316L Stainless steel
- Body**
Die cast aluminium or aluminium profile with die cast aluminium bottom and connection box.
- Gaskets**
Silicone
- Diffusers**
15 mm Tempered Glass (Aluminium Cover)



- Screws**
316L Stainless steel
- Glands**
2 x PG 13.5
- Recessing Tube**
Polyamide 6

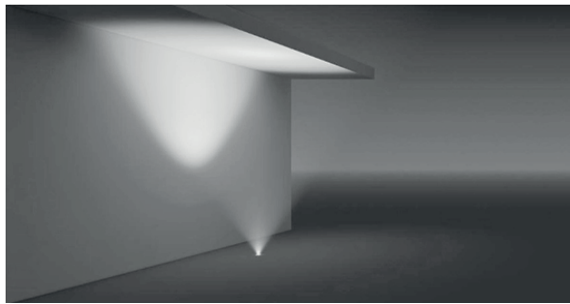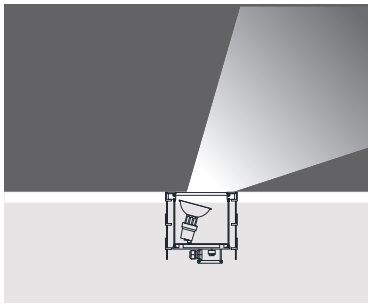

HALOGEN



- Lampholder** : E27 fixed
- Reflector** : -
- Diffuser** : Clear Glass
- Temp** : 129°C



HALOGEN PAR 30 / 75W	Code No
Inox (Stainless Steel)	212131

Accessories:




Louvre
To avoid glare.
Can be applied to all lamp types except Halogen PAR 30 and 38

Code No 955105

Caution:

The louvre and filter cannot be applied to the standard fixture. These options should be mentioned when ordering.



Square Version:

All fixtures are available with a square cover with dimensions 220 x 220 mm. Please indicate square version when ordering.